MILITARY SPECIFICATION

INTEGRATED CIRCUIT, DIGITAL, CMOS LOGIC ARRAY MONOLITHIC SILICON

This Amendment forms a part of Military Specification MIL-I-48634 (AR), dated 31 July 1986, and is approved for use by the U.S. Army Armament Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.1: Change "M718E1/M741E1" to "M718A1/M741A1".

2.1.1: Under Specification, MILITARY, Add MIL-A-48078: Ammunition, Standard Quality Assurance Provisions, General Specification For.

PAGE 3

3.2.5: Delete in its entirety and substitute:

"Pin Assignments. Pin assignments shall be as shown in Figure 2.

PAGE 6

3.4.1: Change "°C" to "°F" under Unit.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

PAGE 41

3.5.2, Last sentence: Delete "3.5.15" and substitute "3.4.3.3".

3.5.5: Delete "3.5.15" and substitute "3.4.3.3".

3.5.6, Last sentence: Delete "3.5.15" and substitute "3.4.3.3".

PAGE 43

4.3.5, Last sentence: Delete "(see paragraph 5.3)" and substitute "(see paragraph 5.3.1)".

PAGE 44

Add the following paragraph:

"4.6 Screening. Screening shall be in accordance with MIL-STD-883, method 5004 with the exception of the following:

Screen	Method
Burn-In Test	1015 at 125°C for 160 hours
Post Burn-In	1015 at 25°C all electrical parameter per Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.

PAGE 48

Add the following figure:

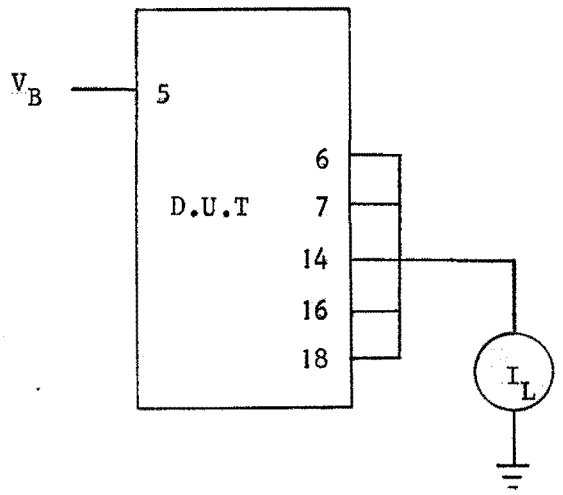


FIGURE 3. LEAKAGE CURRENT TEST.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1375-A387)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:35Z
Check the source to verify that this is the current version before use.