NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard establishes the overall dimensions and detail engineering requirements for incandescent lamps, type TG-28. The item covered hereon is standard for use in the design of new equipment procured by the Bureau of Ships.

FED. SUP. CLASS 6240

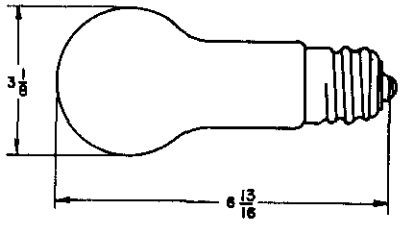

Characteristic	Type TG-28
Candlepower	--------
Watts	50/100/150
Volts	115
Bulb	PS-25
Finish	Inside frosted
Base	Mogul, 3 contact
Filaments	(B) 2C - 2R
Light center length (inches)✓1	5
(B) ~~Overall length (maximum inches)~~	~~6-13/16~~
Hours life (approximate)	1000
Lumen output (approximate)	(B) 590/1450/2040
Use	Floor lamp

✓1 Distance from center of light source to bottom base contact.

© CANCELED AFTER 23 JULY 1984. NO SUPERSEDING STANDARD.

APPROVED 25 MAY 1954 REVISED (A) 17 MAR 1954 (B) 6 JUN 1956 © 23 JULY 1984

MS part number	FIIN
(B) MS15598-1	143-3069

CUSTODIANS	OTHER INT.
Ships	A - N - AF -

MILITARY STANDARD

LAMP, INCANDESCENT, PS-25, MOGUL, 3 CONTACT

MS15598 (SHIPS)

PROCUREMENT SPECIFICATION | SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:49Z
Check the source to verify that this is the current version before use.