FED. SUP CLASS
5930

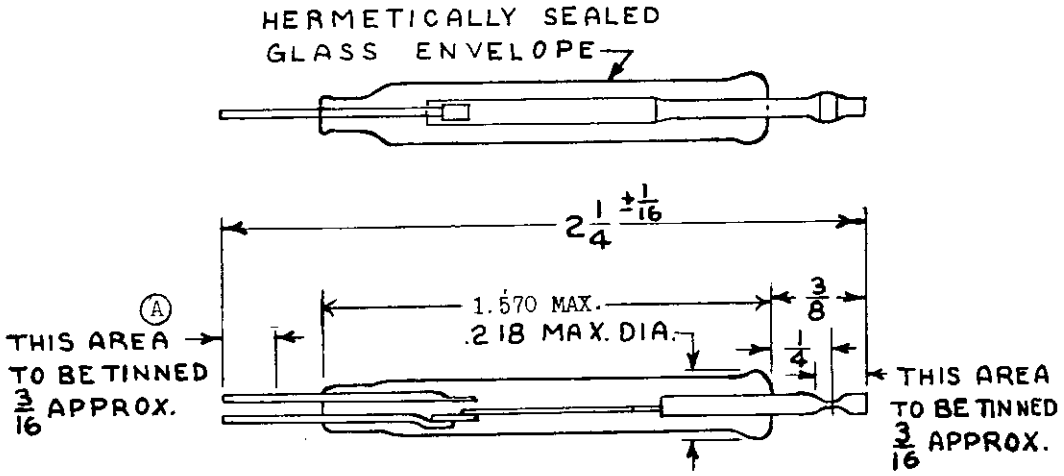

REQUIREMENTS

1. CHARACTERISTICS:
   Rating:
   D.C. 250V, 20 W
   A.C. 250V, 40 V.A.
   Poles: Single - Double Throw
(A) Contacts: Gold or rhodium plated.
   Hermetically sealed in an inert atmosphere
   Breakdown voltage: 500 V RMS 60 cycles

2. Contacts shall be actuated by an external magnetic field, which may be obtained from a permanent magnet, electromagnet or a combination of both.

3. Test: Two contact assemblies of each 1000 contact assemblies or fraction thereof furnished on each Government order or purchased by shipbuilding contractors for installations on ships shall be tested for 10,000 operations under rated load and voltage and shall withstand this test without failure of any part thereof.

Dimensions are in inches
Tolerances unless specified
Decimal dimensions ± 0.005 Fractional dimensions ± 1/64

(B) CANCELED AFTER 6 AUGUST 1986. NO SUPERSEDING STANDARD.

Part number
MS18112-1 Project 5930-N617

APPROVED 17 Dec 1963 REVISED (A) 29 Jan 1968 (B) 6 Aug 1986

This military standard is approved by the Naval Ship Engineering Center, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SH Other Cust	TITLE CONTACT ASSEMBLY, ELECTRICAL, DRY REED TYPE S.P.D.T.	MILITARY STANDARD MS 18112(SHIPS)
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.