MIL-B-46334C(MU)
15 November 1972
SUPERSEDING
MIL-B-46334B(MU)
10 September 1970

MILITARY SPECIFICATION

BINOCULAR, INFRARED: M18

1. SCOPE

1.1 This specification covers a completely self contained, hand held infrared binocular providing visibility for night observation and limited lighting conditions.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-B-18	Batteries, Dry
MIL-O-13830	Optical Components for Fire Control Instruments: General Specification Governing the Manufacture, Assembly, and Inspection of
MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-P-46320	Power Supply: 10516158

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions

DRAWINGS

U.S. Army, Frankford Arsenal

C10516158	Power Supply: 10516158
F10514360	Binocular: M18

FSC 6650

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET

8270115 Packaging of Binocular, Infrared, M18

(copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.- Materials shall be in accordance with drawings, material specifications, and general specifications forming a part of this specification.

3.2 Fabrication.- The binocular shall be manufactured in accordance with Drawing F10514360 and drawings pertaining thereto.

3.3 General specification.- The binocular shall meet the following requirements of MIL-F-13926:

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship
f. Electron tubes

3.4 Environmental.

3.4.1 Storage temperature.- The binocular, less battery, after exposure to temperatures of -80°F and +160°F, shall show no evidence of cement separation, glass breakage, or other physical failure. The binocular, with battery, shall then meet all requirements of this specification at room ambient temperature (60°F to 90°F).

3.4.2 Operating temperatures.- The binocular shall meet the applicable requirements of 3.6, 3.11.4 and 3.12.1 while exposed and thermally stabilized at ambient temperatures of -40°F and +150°F, and shall then meet all requirements of this specification (+60°F to +90°F).

3.4.3 Vibration.- There shall be no visible damage or loosening of assembled parts as a result of vibration at a constant frequency of 30 cycles per second (cps) with an amplitude of 1/16 inch (1/8 inch maximum excursion) for a period of 5 minutes plus or minus 15 seconds. Vibration mode shall be with the binocular in its normal operating position or optionally held vertically with objective end up. Subsequent to vibration, the binocular shall meet all the following requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

3.4.4 Humidity.- The binocular shall meet all remaining requirements of this specification after being subjected to a relative humidity of 90 to 95% and a temperature of 104° ± 3.6°F for a period of 96 hours. The binocular shall show no evidence of internal moisture and shall meet the requirement of 3.6, Image Steadiness, after a 1 hour maximum drying period at room ambient conditions.

3.5 Sealing.- The binocular shall not show evidence of leakage when subjected to an external pressure of 10 ± .25 psi for a 10 ± .25 minute period.

3.6 Image steadiness.- There shall be no visible flicker, no movement of the image nor audible sparking when observed for 1 minute. This observation shall be made after the expiration of 15 seconds tube stabilization time. The tubes shall be energized by utilizing Battery BA2042U (MIL-B-18) or equal and power Supply: 10516158 (MIL-P-46320).

3.7 Resolution.- The resolving power of each monocular on the optical axis for a parallel bar test target shall be 2 minutes of arc or less.

3.8 Magnification.- The magnification of the 2 telescopes of any one binocular shall not differ from one another by more than 6 percent at the infinity focus of the objective.

3.9 Collimation.- When 2 parallel rays are projected into the 2 objectives respectively, the conjugate rays emerging from the 2 eyepieces shall be parallel within the following limits at infinity focus of the eyepiece and for any setting of the interpupillary distance scale between 64 and 75mm.

3.9.1 Dipvergence.- Dipvergence shall not be more than 20 minutes of arc.

3.9.2 Divergence.- Divergence shall lie between 5 minutes and 35 minutes of arc.

3.9.3 Objective focus.- The focus of the system shall be set between 500 meters and infinity and the locking rings and set screws secured.

3.10 Collimation change due to electron image shift.- After vibration, the binocular shall be subjected to ten cycles of "ON" and "OFF" rated voltage. The voltage being applied for 15 seconds and removed for 10 seconds. The collimation of the binocular at the expiration of each "ON" period shall not exceed the requirements of 3.9.

3.11 Eyepiece.

3.11.1 Focus.- Each diopter scale shall indicate zero diopters within a tolerance of plus or minus 1/4 diopter when the eyepiece is set at zero diopters and the screen is in sharp focus with the aid of a dioptometer or equivalent.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the currentversion before use.

3.11.2 Diopter movement.- Each eyepiece focus adjustment shall be capable of a minimum movement of plus (+) 1 3/4 to minus (-) 1 3/4 binocular dial scale units.

3.11.3 Torque.- After exercising the diopter adjustment through its range of rotation a total of 6 times, the rotative torque shall be between 7 and 60 ounce-inches. The variation in torque in any one eyepiece shall not exceed 10 ounce-inches. The difference in average torques between eyepieces shall not exceed 30% of the higher average value.

3.11.4 Operability.- The eyepieces shall be operable at the extreme temperatures of 3.4.2.

3.12 Interpupillary adjustment.- The interpupillary distance indicated by the scale shall be correct to within 1mm.

3.12.1 Torque.- The torque required to adjust the interpupillary setting between 64 and 75mm shall be between 12 and 22 pound-inches at room temperature (60° to 90° Fahrenheit) and shall not exceed 43 pound-inches at the extreme temperatures specified in 3.4.2.

3.13 Cleanliness of optics.

3.13.1 Dirt particles.- With the binocular energized and viewed through the eye end, there shall be not more than 3 dirt particles or particles classed as dirt appearing within the central 6 degrees of the field of view. The maximum dimension of such particles shall be 1/4 angular mils. There shall be no more than 4 dirt particles having a maximum dimension of 1/2 mils in the outer field of view. A minimum separation of 2 degrees shall exist between any 2 dirt particles.

3.13.2 Other.- There shall be no evidence of moisture, grease, fingerprints, surface contamination, fractures or adhesive separations on any glass component when viewed by reflected light from the objective or eye end of the binocular.

3.14 Coupling engagement.- The compressive force required to attach or detach the coupling of Cable Assembly, 8287003 shall not exceed 16 pounds.

3.15 Reliability.- The binocular shall have a mean time between failure (MTBF) of not less than 500 hours.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the current version before use.

where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 binoculars plus 3 each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance of materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply. Examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables I, II and III herein. Examination and tests for packaging, packing, and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the current version before use.

in Tables I, II and III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I - CLASSIFICATION OF DEFECTS

CLASS CRITICAL: NONE MAJOR: AQL 1.5%		REQUIREMENT	TEST PROCEDURE
101.	Sealing	3.5	4.6.6
102.	Image steadiness	3.6	4.6.7
103.	Resolution	3.7	4.6.8
104.	Magnification	3.8	4.6.9
105.	Collimation	3.9	4.6.10
106.	Objective focus	3.9.3	4.6.10.1
107.	Collimation change (image shift)	3.10	4.6.11
108.	Eyepiece focus	3.11.1	4.6.12
109.	Diopter movement	3.11.2	4.6.13
110.	Eyepiece torque	3.11.3	4.6.14
111.	Interpupillary adjustment	3.12	4.6.16
112.	Interpupillary torque	3.12.1	4.6.17
113.	Cleanliness of optics	3.13.1 & 3.13.2	4.6.3
114.	Coupling engagement	3.14	4.6.4
115.	Reliability	3.15	4.6.5

MINOR: None defined

NOTE: The tests in Table I shall be conducted at a temperature between +60° and +90°F unless otherwise specified.

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General.- Three binocular assemblies shall be selected at random as a special sampling from each 50 produced. The sample shall meet the requirements and tests in Table II.

TABLE II

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Materials	3.1	Applicable dwgs & specs - visual
302.	Fabrication	3.2	Applicable dwgs - visual & 4.6.1
303.	General specification	3.3	MIL-F-13926 - visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

NOTE: The tests in Table II shall be conducted at a temperature between +60° and +90°F., unless otherwise specified.

4.4.2 Environmental.- Three binocular assemblies shall be selected at random as samples from each 50 produced or from each month's production, whichever occurs first. Each sample shall be subjected to the tests in Table III and shall then meet the requirements and tests in Table I except Characteristic 115, Reliability.

TABLE III

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
304.	Storage temperature	3.4.1	4.6.2.1
305.	Operating temperature	3.4.2	4.6.2.2
306.	Vibration	3.4.3	4.6.2.3
307.	Humidity	3.4.4	4.6.2.4

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot shall be suspended by the Government until necessary corrections have been made by the contractor and resubmitted items have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specification or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the technical data package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Device to test eyepiece torque requirements.- The device shall consist of a torque wrench type tester which will permit reading in both clockwise and counterclockwise directions the accuracy of which shall be plus or minus 1/4 ounce inch throughout the zone of excursion. The device shall be equipped with a suitable adapter.

4.5.2.4 Device to test interpupillary torque.- Device to test interpupillary torque. The device shall consist of a torque wrench tester which will permit reading in both clockwise and counterclockwise directions, the accuracy of which shall be plus or minus 1/2 pound inch throughout the zone of excursion. The tester shall be equipped with a suitable adapter to engage one side of the binocular while the other side is held rigidly in order to permit the torque reading to be taken between the prescribed interpupillary setting.

4.5.2.5 Device to test pressure requirements.- The device shall be capable of applying 10 plus or minus 1/4 psi external pressure to the exterior surfaces of the binocular. The device shall be equipped with an air-tight adapter which will accommodate the binocular and shall be connected to the device by means of air-tight connections. The device and adapter shall indicate no loss of pressure when fully charged during a minimum time period of 10 minutes as read on a pressure drop type measuring gage.

4.6 Test methods and procedures.

4.6.1 Fabrication.- The following requirements and tests shall apply prior to final assembly of binocular in compliance with 3.2:

a. Each body assembly shall have met the requirements of Drawing F10514360 for the high potential test prior to insertion of the eyepiece mount assembly, image converter tube and the power supply.

b. Each Cable Assembly 8287003, shall have met the requirements of Drawing F8287003 and the Supplementary Quality Assurance Provisions pertaining thereto prior to assembly to binocular.

4.6.2 Environmental.- The binocular shall be thoroughly examined for physical defects after each environmental test. A visual and tactile examination shall be made and recorded for missing parts and physical damage. To avoid thermal shock, the rate of temperature change of the test chambers shall not exceed 20 degrees per hour throughout the temperature cycling tests of 4.6.2.1 and 4.6.2.2.

4.6.2.1 Storage temperatures.- The test equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

MIL-F-13926. The test shall be performed as specified in Procedure II of MIL-F-13926 at the temperatures specified in 3.4.1. The binocular, less battery, shall be placed in a test chamber and the temperature of the test chamber reduced gradually to -80°F. The binocular shall remain at this temperature for a minimum of 5 hours. At the completion of this 5 hour period, the temperature of the test chamber shall be gradually raised to +160°F. The binocular shall remain at this temperature for a minimum of 5 hours. At the completion of this 5 hour period, the temperature of the test chamber shall be gradually reduced to room ambient temperature (+60° and +90°F) and visually examined for compliance with 3.4.1. The binoculars shall then be tested as specified in 4.6.6 through 4.6.17, inclusive (at room temperature only) and Tests 4.6.3, 4.6.4 for compliance with 3.4.1.

4.6.2.2 Operating temperatures.- The testing equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The test shall be performed as specified in Procedure I of MIL-F-13926 at the temperatures specified in 3.4.2. The binocular shall be placed in a test chamber and the temperature of the chamber reduced gradually to -40°F. The binocular shall remain at this temperature for a minimum of 5 hours. At the completion of this 5 hour period and while at -40°F, the binocular shall be subjected to the Tests in 4.6.7, 4.6.15 and 4.6.17. Upon completion of these tests, the chamber shall be gradually raised to +150°F. The binocular shall remain at this temperature for a minimum of 5 hours. At the completion of this 5 hour period and while at 150°F, the binocular assembly shall again be subjected to the Tests in 4.6.7, 4.6.15 and 4.6.17. Upon completion of this test, the chamber shall be gradually reduced to room ambient temperature (+60°F to +90°F). The binoculars shall then be tested to 4.6.3, 4.6.4 and 4.6.6 through 4.6.17, inclusive.

4.6.2.3 Vibration.- This test shall be performed as specified in Procedure V of MIL-F-13926, except the vibration equipment shall provide the conditions of amplitude, frequency, time durations and directions, as specified in 3.4.3.

4.6.2.4 Humidity.- This test shall be performed as specified in Procedure I of MIL-F-13926 except that the conditions specified in paragraph 3.4.4 shall apply.

4.6.3 Cleanliness of optics.- Subsequent to conducting all tests and examinations specified in 4.6, the optical surfaces of the binocular assembly shall be visually inspected in accordance with MIL-O-13830 to determine compliance with 3.13.

4.6.4 Coupling engagement.- The compressive force required to attach and remove the high voltage cable from the binocular assembly, shall not exceed that specified in 3.14.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the currentversion before use.

4.6.5 Reliability demonstration.- Reliability demonstration test shall be conducted as part of "First Article Test" to insure compliance with the requirements of 3.15 at a 90% confidence level. A minimum of 350 hours shall be accumulated on each First Article Sample (Sample size of 3). This will include 30 hours (minimum) of operation after/during exposure to each environment of this specification. Testing during exposure to the operating environmental conditions will be as specified in paragraphs 4.6.14, 4.6.15 and 4.6.17, and will include energizing and operating the binocular under these operational conditions. The number of hours of operation and the total number of chargeable failures shall be compared to Table IV for accept/reject decision.

TABLE IV

TOTAL SAMPLE TEST TIME IN HOURS	TOTAL CHARGEABLE FAILURE ACCEPT	REJECT
1152	0	6
1945	1	6
2662	2	6
3341	3	6
3997	4	6
4638	5	6
5266	6	-

Reliability test data: Reliability test data shall be recorded and consist of all equipment malfunction and test environments, number of hours completed at time of malfunction, nature and cause of malfunction, time required to correct malfunction, corrective action and item serial number.

Failure definition: Any malfunction which renders the equipment inoperative or operative outside the limits of this specification. A charge able reliability failure is a malfunction which upon failure analysis is not related to an assignable cause (manufacturing process, procedure, work manship, etc.) i.e., random in nature. Correction to the manufacturing process, and a procedure shall be accomplished for all non-chargeable malfunctions and testing shall resume in the environment where the incident occurred. The activity (Frankford Arsenal) shall review all failure analysis for concurrence of contractor's classification of failures.

4.6.6 Sealing.- The binocular shall be placed in the adapter which is then connected to the special testing equipment (see 4.5.2.5). The device and adapter, with the binocular, shall be charged with 5 psi pressure and stabilized. The gage shall record no leakage after a period of 10 minutes to determine compliance with 3.5.

4.6.7 Image steadiness.- The steadiness of the image shall be visually checked to assure that no visible movement or flicker is evident in the time specified in 3.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

4.6.8 Resolution.- With the binocular mounted in the special testing equipment and the device set-up as shown on Drawing F7694612, observe the bar test target through the eyepiece of the double collimator assembly. The test pattern shall be resolved in each of the 4 meridians and must not exceed the specified requirements in 3.7.

4.6.9 Magnification.- Magnification shall be measured as prescribed on Drawing F7694612, operating instructions for test fixture for Binocular Infrared: M18. The percentage difference shall not exceed the amount specified in 3.8.

4.6.10 Collimation.- Collimation shall be measured as prescribed on Drawing F7694612, and must be within the tolerance specified in 3.9.

4.6.10.1 Objective focus.- To determine compliance with 3.9.3, utilize the special test fixture and align in accordance with the instructions on Drawing F7694612. Adjust the range between 500 meters and infinity as read on the range scale. To obtain a 500 meter setting, rotate the crank on the range scale dial approximately 1/8 of a turn counterclockwise (between 500 meters and infinity range mark). With the binocular mounted in the special testing equipment, sight through the double collimator assembly and focus the screen until the image is sharpest. While turning the locking ring on the eyepiece assembly, view the screen, until the collimated image on screen is focused. At this position, rotate the other locking ring to secure this setting.

4.6.11 Collimation change.- With the binocular mounted in the special testing equipment and collimation completed, the binocular shall be subjected to the specified "ON" and "OFF" cycles. At the expiration of each "ON" period, the binocular shall be tested as specified in 4.6.8 and meet the requirements of 3.10.

4.6.12 Eyepiece focus.- With the binocular mounted in the special testing equipment, the eyepiece diopter scale set to zero diopters and using a calibrated dioptometer, view through the dioptometer and obtain best focus of the screen of the binocular by turning the diopter scale on the dioptometer. The dioptometer objective scale reading shall be within the tolerance of 3.11.1 for both eyepieces.

4.6.13 Diopter movement.- Position each diopter movement to zero diopter setting as indicated on the diopter scale with reference to the index mark. Rotate each diopter movement to its clockwise stop, note diopter setting on scale, then rotate the diopter movement to its counterclockwise stop, note diopter setting on diopter scale. Each diopter movement shall meet the requirements specified in 3.11.2 with respect to each index mark.

4.6.14 Torque (eyepiece).- Each torque reading shall be determined by utilizing special testing equipment as outlined in 4.5.2.3 to insure compliance with 3.11.3. Exercise each eyepiece through its full excursion clockwise and counterclockwise, 6 times, as specified in 3.11.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the current version before use.

Subsequent to this, record the average torque value obtained from a full clockwise rotation and again for the counterclockwise rotation. Each reading on each eyepiece shall be within the 7 to 60 ounce-inches range specified in 3.11.3 and shall not vary from each other more than the 10 ounce-inches specified. Determine the value of 30% of the highest value average torque recorded between the 2 binocular eyepieces. The difference in average torques recorded clockwise and counterclockwise in the 2 eyepieces (clockwise and counterclockwise) shall not exceed this value to insure compliance with 3.11.3.

4.6.15 Operability.- While the binocular is exposed to the extreme operating temperatures, the eyepieces shall be rotated to insure correct operation as specified in 3.11.4.

4.6.16 Interpupillary adjustment.- The interpupillary adjustment shall be checked by means of a metric scale used between the inside edges of the eyepieces. This measurement shall be the same as the reading on the scale of the binocular within the specified tolerance in 3.12.

4.6.17 Torque (interpupillary).- The torque required to adjust the interpupillary setting within the limits specified shall be checked with special testing equipment (see 4.5.2.4) at the temperatures specified and shall be within the allowable tolerance specified in 3.12.1.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 8270115. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable level of preservation, packaging and packing.
c. Applicable stock number.
d. Provisions for First Article testing.

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 6650-A063

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T05:36Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*


SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the current version before use.

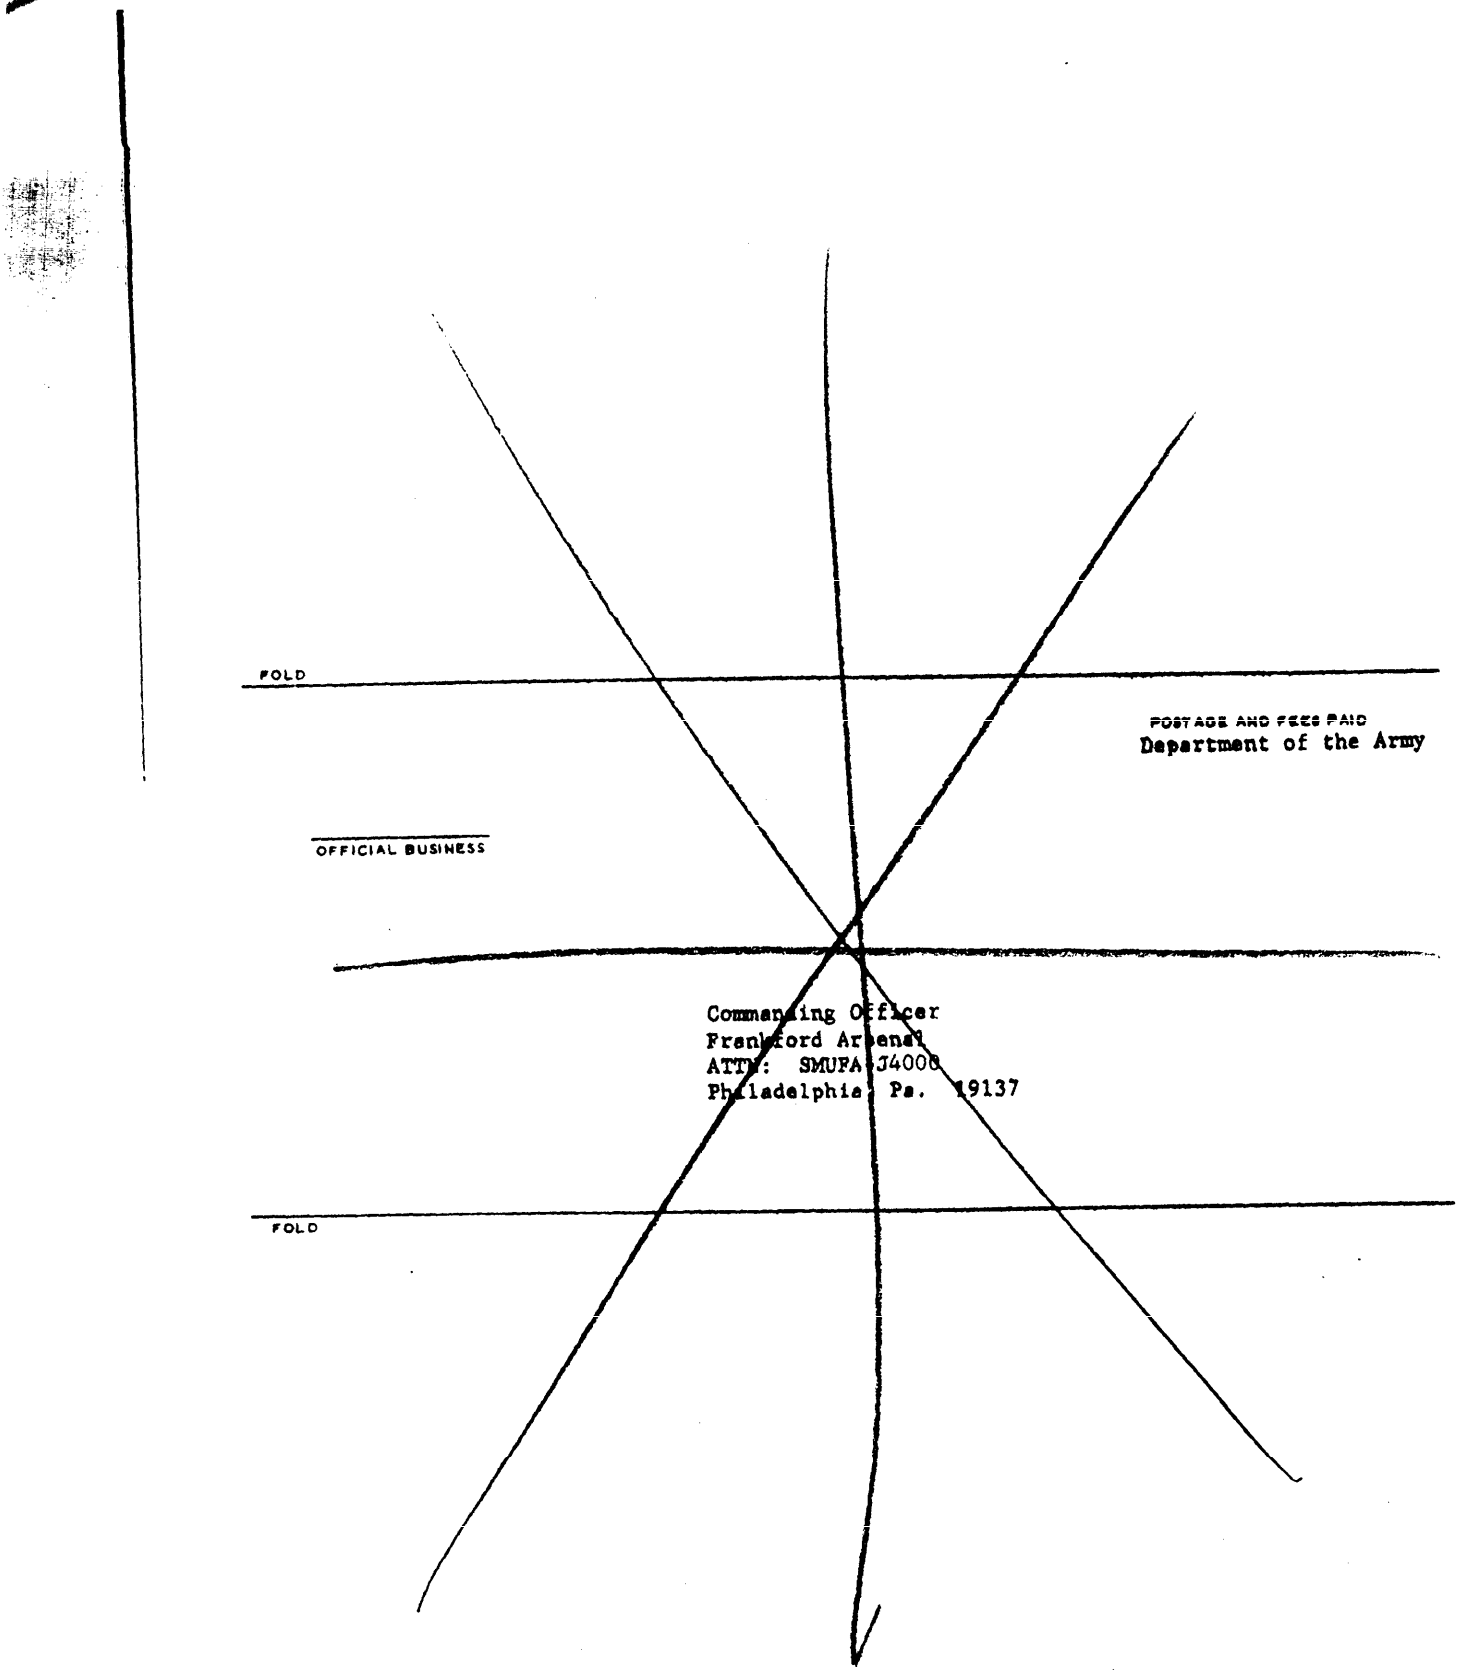

Source: https://assist.dla.mil -- Downloaded: 202610-22T05:36Z
Check the source to verify that this is the current version before use.