MIL-A-14822(MU)
AMENDMENT 2
19 October 1970
SUPERSEDING
AMENDMENT 1
1 April 1970

MILITARY SPECIFICATION

AMPLIFIER - DETECTOR: 10525674

This amendment forms a part of Military Specification MIL-A-14822(MU), dated 21 October 1968.

* Paragraph 3.5.3: At the end of the paragraph, add the following: "This requirement shall only be accomplished during tests performed at standard ambient conditions. All tests performed at environmental conditions other than standard ambient conditions shall omit this requirement."

* Paragraph 3.5.4: Delete in its entirety and substitute:

"3.5.4 Modulator drive level.- With the Power Supply - paragraph 3.5.1(a) - held at +22.0 ± 0.05 VDC, the Modulator Drive Level shall be adjusted to 0.4 ± 0.05 volts RMS with a frequency of 45 MHz ± 0.01 percent into a 50 ohm non-inductive resistive load. This adjustment shall only be accomplished during the initial test (first test sequence performed prior to environmental tests) and during the final test (last test sequence prior to shipment) at standard ambient conditions. During all other tests (both environmental and at standard ambient conditions except as noted above), the Modulator Drive Level shall be monitored and remain at 0.4 ± 0.1 volts RMS with a frequency of 45 MHz ± 0.01 percent into a 50 ohm non-inductive resistive load without any adjustment of the Modulator Drive Level."

* Paragraph 3.5.6.1: Delete "55" and substitute "50".

* Renumber paragraph "3.3.6.2" to "3.5.6.2".

* Paragraph 3.5.6.2: Delete "55" and substitute "50".

Paragraph 3.5.7 Noise and Distortion: Delete "0.8 millivolts" and substitute "2.5 millivolts".

* Paragraph 3.5.8, Line 2: Delete "+67 and +73" and substitute "+65 and +75".

* Paragraph 3.5.10, Line 3: Delete "of paragraph 3.5.4" and substitute "as delineated in paragraph 3.5.4".


* Paragraph 3.5.11, Line 1: Delete "0.4" and substitute "0.4 ± 0.1".

* Paragraph 3.5.12, Line 1: Delete "320" and substitute "360 ± 20".

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:50Z
Check the source to verify that this is the current version before use.

* Figure I, Page 11 (Lower right corner): Delete "All input connections to J3 and J4" and substitute the following:

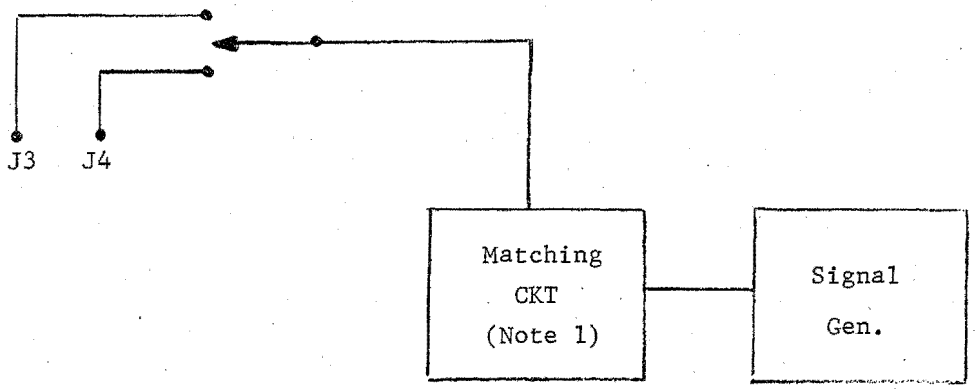

"Note 1: An impedance matching circuit (CKT) to match the output impedance of the Signal Generator and the input impedance (approximately 95 Ω) of the Amplifier-Detector."

* Paragraph 4.6.2.3, Line 1: Delete "Adjust potentiometer R27 fully clockwise". At the end of the paragraph, add the following: "This test shall be performed subsequent to the accomplishment of 4.6.2.4 and 4.6.2.4.1."

* Paragraph 4.6.2.4: Add "This test shall only be performed as delineated in 3.5.3."

* Paragraph 4.6.2.4.1: Delete in its entirety and substitute:

"4.6.2.4.1 Modulator drive level.- Adjust potentiometer R27 to the requirements delineated in 3.5.4. Monitor the requirements for 20 minutes."

* Paragraph 4.6.2.5, Line 1: Delete "(50 ohm output impedance) and R-in" and substitute "and Matching Circuit".

* Paragraph 4.6.2.6.1, Line 1: Delete "(50 ohm output impedance" and R-in" and substitute "and Matching Circuit". Line 12: Delete "55" and substitute "50".

* Paragraph 4.6.2.7 Noise and Distortion: Delete "0.8 millivolts" and substitute "2.5 millivolts". Delete "(50 ohm output impedance" and Rm" and substitute "and Matching Circuit".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:50Z
Check the source to verify that this is the current version before use.

* Paragraph 4.6.2.8, Line 2: Delete "+67 and +73" and substitute "+65 and +75".

* Paragraph 4.6.2.12, Line 1: Delete "Remove resistor load Rm (95 ohm) from the 45 megohertz signal generator. As diagramed in Figure 4, apply a 320" and substitute "Remove all Power Supply (paragraph 4.6.2.2) connections. With a signal generator and a Matching Circuit as diagramed in Figure 1 and Figure 4, apply a 360 ± 20".

*The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirement of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1290-A280

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:50Z
Check the source to verify that this is the current version before use.