MIL-B-14984 A(AR)
6 June 1977

Superseding
MIL-B-14984(MU)
29 Jan 1969

MILITARY SPECIFICATION

BODY-OGIVE MATCHED MACHINED ASSEMBLY FOR M454 PROJECTILE

This specification is approved for use by the US Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers special requirements not included on the drawings, and provides the quality assurance provisions for the fabrication of parts, assembling and preparation for delivery for one type body-ogive matched machined assembly used to assemble the M454 projectile and designated as body-ogive matched machined assembly for M454 projectile.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS (see 6.6)

MILITARY

MIL-C-14672 - Container Shipping and Storage: M467.
MIL-H-14705 - Handling Device.
MIL-P-116 - Preservation, Methods of.
MIL-T-46035 - Titanium Alloy.

STANDARDS

FEDERAL

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document, should be addressed to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAN-Q, Dover, New Jersey 07801, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

FSC-1110

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

Federal Test Method Standard No. 151 - Metals; Test Methods.

MILITARY

NAS-108C4A411 - Screw, Self-Locking.
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1167 - Ammunition Data Cards.
MIL-STD-1168 - Lot Numbering of Ammunition.
MS-16995 - Screw Cap Socket Head.
MS-29513 - Packing, Preformed.
MS-51026 - Set Screw, Socket Flat Point.
MS-9201 - Packing, Preformed.
NAS 1081C4A4N - Screw Self-Locking.

DRAWINGS (see 6.6)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND PRODUCT AND PACKAGING DRAWINGS

8790670 - Desiccant.
8794342 - Seal, Metallic, Assembly, Details and Instructions for Application.
8850104 - Contr, Shipping and Storage: M467
8850175 - Contr, Shipping and Storage: M467, Pkg. and Mkg. for ORD Components for Proj.: M454.
8857432 - Retainer, Test Plug.
8857437 - Insert-Screw Assembly.
8857439 - Clutch Half, Positive.
8857471 - Base.
8857477 - Insert, Screw Thread
8857478 - Pin, Straight Headless.
8857479 - Clutch Half, Positive.
8857480 - Body,
8857481 - Body Section, Rear.
8857482 - Body Section, Center.
8857483 - Body Section, Front.
8857484 - Packing, Preformed.
8857487 - Body-Ogive Matched Machined.
8857488 - Adapter Body to Ogive.
8857489 - Ogive Assembly.
8857490 - Ogive
8857491 - Window, Observation.
8857492 - Plate, Retaining, Window.
8857543 - Key, Machine.
8857545 - Pin, Straight, Headless.
8857553 - Screw, Cap Socket Head.
8861953 - Carton, Packing, Ammunition, for Hardware for Projectile: M454.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

8865036 - Adapter, Body to Ogive Assembly.
8865037 - Pin.
8865534 - Handling Device Projectile, H4220.
8881785 - Insert, Pin.
8881786 - Set Screw (Mod).
8881787 - Insert Pin Assembly.
8882034 - Screw, Self-Locking.
8883534 - Bag Packing for Spare Parts.
9204488 - Box, Pkg. Ammo, for Interplant Shipment of Metal Parts for Projectile.
9206165 - Protector, Thread, Base.
9212668 - Mandatory Process for Roll Over.
9212669 - Sealing Compound.
9212670 - Electrolytic Process.
9212671 - Sintered Carbide.
9212672 - Lubricant, High Pressure.
9216409 - Blank Rotating Band.
ET-8857487 - Equipment Tabulation.

PUBLICATIONS

ASTM - Designation E9-61 - Compression Testing of Metallic Materials.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material used to fabricate any part complies with the specifications listed on the applicable drawing.

3.2 Assembly. The projectile shall comply with all requirements specified on drawing (dwg) 8857487, with all requirements specified herein, and with the requirements of applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization.

3.4.1 Not required on drawings. The contractor may assign serial numbers for internal control purposes at his discretion. The finish or any dimension of the item shall not be altered or damaged by the application of the serial number. The material used for marking shall not be subject to corrosion, fungus, flaking, or other similar adverse action which could prevent proper functioning of the item. Titanium and uranium parts shall be marked only with a process approved by the procuring agency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

3.4.1.1 Unclassified items. The contractor may select any number suitable for his purpose.

3.4.1.2 Classified items. Production quantities shall not be revealed. Random serial numbers shall be selected by the contractor in a manner which has been approved by the procuring agency. These numbers shall not be duplicated.

3.4.2 Required by drawing. The contractor shall assign serial numbers as required by drawings.

3.4.2.1 Unclassified items. The contractor may select any number which complies with the drawing requirements. These numbers shall not be duplicated.

3.4.2.2 Classified items. Production quantities shall not be revealed. Random serial numbers shall be selected by the contractor in a manner which has been approved by the procuring agency. These numbers shall not be duplicated.

3.5 Rotating band (see dwgs 8857471, 8857487, and 9216409).

3.5.1 Seating. After seating of the band and before machining, the diametrical clearance between the band and band seat shall not exceed 0.005 inch at any point of measurement on the band when computed as specified in 4.4.1.1.

3.5.2 Physical properties. The band after seating and before machining shall demonstrate the following physical properties when tested as specified in 4.4.1.1.

a. Tensile strength - 30,000 pounds per square inch (psi).
b. Elongation - 25%

3.5.3 Damage. The finished machined and assembled rotating band shall be inspected for the following defects:

a. Cracks
b. Foreign matter embedded in rotating band material
c. Any dent, nick, scratch or gouge which exceeds the allowable depth (see Fig. I.).

Any rotating band which has any of the defects listed in a, b and c shall be rejected and removed from the lot when inspected as specified in 4.4.1.2.

3.6 Preformed packing (see dwg 8857484).

3.6.1 Axial thickness (see dwg 8857484). Axial thickness, dim. B shall be the average of three measurements taken at points distributed around the circumference of the ring when measured as specified in 4.4.2.1 and comply with the requirements of the applicable detail on dwg 8857484.

3.6.2 Inside diameter (see dwg 8857484). The inside diameter shall be measured as specified in 4.4.2.2 and comply with the requirements of the applicable detail on dwg. 8857484.

3.7 Metal to metal contact (see dwg 8865036). Metal to metal contact shall be considered established when the calculated distance from the forward inside face to the pin shall be equal to the measured distance after assembly within .001 inch when measured and calculated as specified in 4.4.3 Actual measurements shall be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

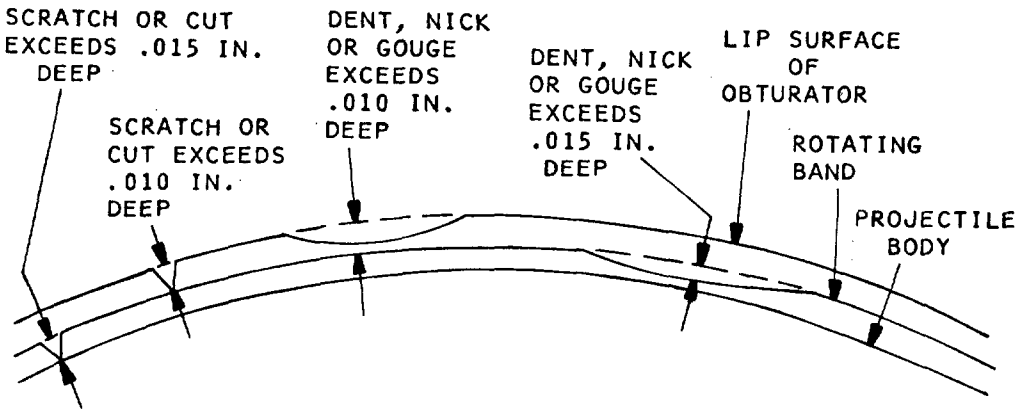


FIGURE 1

ROTATING BAND INSPECTION CRITERIA

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

3.8 Repaired scratches (see parts 8857481, 8857482, 8857483). If the scratch, nick, or gouge in a 63 finish is located near fillets, chamfer, threads, or radii, so that repairing the imperfection will touch the fillet, chamfer, thread, or radii, and is greater than .005 inch deep on the base, rear body, and forward body or is greater than .003 inch deep on the center body, the component shall be rejected If the depth of the imperfection is .005 inch deep or less on the base, rear body, and forward body or .003 inch deep or less on the center body when located near a fillet, chamfer, thread, or radii, the imperfection shall be repaired as specified in 4.4.4. The maximum depth of the repaired imperfection shall not exceed the maximum depth allowed for the imperfection. If the imperfection in any area cannot be felt with a thumbnail, no repair is necessary. If the imperfection in any area other than previously defined on the base and body is greater than .008 inch deep the component shall be rejected. If the imperfection is less than .008 inch or less deep the imperfection shall be repaired as specified in 4.4.4. On the center body the maximum width of the repaired area shall not exceed .100 inch and the cumulative length of repairs shall not exceed 20 inches. Maximum depth of any imperfection repaired not located near a fillet, chamfer, thread, or radii, shall not exceed .008 inch.

3.9 Leakage (see dwg 8857480). Each body after final machining shall maintain air pressure of 4.5 ± 0.5 pounds per square inch gage (psig) for 10 minutes minimum (min) and shall not exhibit a pressure drop greater than 0.1 psig during the 10 minute time interval when tested as specified in 4.4.5.

3.10 Mandatory process for roll over (see dwg 9212668).

3.10.1 Machine specifications. The operation procedures and calibration procedures to comply with dwg 9212668 shall be submitted to Commanding Officer, US Army Armament Research and Development Command, Dover, New Jersey 07801 Attention: DRDAR-OAN-I, for approval prior to use. Provision shall be made to enable the Government inspector to witness and certify: the load rise time or equivalent; the load exerted by the spindle; the dwell time or equivalent; and revolutions per minute (rpm) of the spindle.

3.10.2 Tooling. Each rolling tool shall be certified by the contractor to comply with all drawing requirements (see dwg 9212668). Setup and maintenance procedures shall be submitted to Commanding Officer, US Army Armament Research and Development Command, Dover, New Jersey 07801 Attention: DRDAR-OAN-I, for approval prior to use. Objective evidence (see 6.2) for proper material (see dwg 9212671) used in fabricating the tool shall be available for each tool used in production.

3.10.3 Test piece.

3.10.3.1 Design. The test piece shall simulate the rear portion of the body (see dwgs 8857481 and 8857482) with respect to outside diameter, pin length, hole depth, pin and

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

hole diameter, and material except that pin and holes shall have a .0001 to .0004 positive allowance (clearance) and shall have a minimum of four holes equally spaced around the circumference.

3.10.3.2 Establish machine data. A test piece shall be pin rolled to establish machine data for each machine used in production. 1650 ± 25 pounds spindle load is mandatory for all test pieces pin rolled. After pin rolling, the test piece shall be tested by spinning at 24,000 revolutions per minute minimum about its geometric axis to determine that all the pins are retained in the test piece. Upon completion of successful testing, the machine data shall be released for use in production with the following tolerances:

load rise ± 1 revolution or equivalent
load: 1450 to 1675 pounds
dwell ± 1 revolution or equivalent
revolutions per minute ± 5

The machine data thus established shall not be changed unless authorized by Commanding Officer DRDAR-QAN-R, US Army Armament Research and Development Command, Dover, New Jersey 07801.

3.10.3.3 Verification of machine data. After each 50 assemblies produced, production shall stop until a test piece is pin rolled using the machine data established. After pin rolling, the test piece shall be tested by spinning at 24,000 revolutions per minute minimum about its geometric axis to determine that all the pins are retained in the test piece. Failure to comply with this requirement shall suspend production until authorized to proceed by Commanding Officer DRDAR-QAN-R, US Army Armament Research and Development Command, Dover, New Jersey 07801. If the test piece complies with all the requirements, production shall be resumed.

3.10.4 Inspection records. The contractor shall maintain inspection records for each pin rolled to demonstrate compliance with all requirements in 3.10. Records shall identify each projectile, serial number, pin, and lot number.

3.11 Gap in outside joints (see dwg 8857480). Inspection records shall be available for each projectile, showing measurements in accordance with note on Drawing 8857480 for rear and forward joints in body assembly when measured as specified in 4.4.5. The calculated gap shall not exceed .001 inch or show a variation in width of more than .0005 inch.

3.12 Pin seated on bottom of hole (see dwg 8857480). The pin shall be considered seated on the bottom of the hole when the actual measurement of the assembled pin below flush shall equal the calculated measurement plus or minus .001 inch when measured as specified in 4.4.6. Inspection records shall be available for each pin on the body assembly.

3.13 Interference fit of pins.

3.13.1 Body (see dwg 8857480). Pin holes which are machined to a diameter larger than nominal (.3750 + .0003 inch) in accordance with note 4, dwg 8857480, shall be of uniform diameter within .0003 inch for the full depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

Each hole and its mating pin shall be appropriately identified by a approved marking method (other than metal stamping or engraving) which will permit ready identification of the proper hole/pin combination until assembly is performed.

3.13.2 Body-Ogive matched machined (see dwg 8857487). Pin holes which are machined to a diameter larger than nominal (.3750 + .0003 inch) in accordance with note 16, dwg 8857487, shall be of uniform diameter within .0003 inch for the full depth. Each such hole shall be identified by a number applied in accordance with notes 9 and 10, dwg 8857487. The small bag (see dwg 8861953) containing the mating pin shall be marked with the same identification symbol as the hole, and with the actual pin diameter in addition to the marking specified on dwg 8861953. Inspection records shall show identification symbol and actual hole and pin diameters.

3.14 Perpendicularity of two alignment pin holes (see dwg 8857487). The adapter shall be capable of being removed by hand without the use of mechanical force when tested as specified in 4.4.8.

3.15 Workmanship.

3.15.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.15.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.15.3 Burrs. Parts shall be free from burrs.

3.15.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material

3.15.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agents.

4. OUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted (see 6.5). When the contract requires first article inspection, the contractor shall submit 3 complete assemblies (see dwg 8857487), 3 subassemblies (see dwgs 8857437, 8857439, 8857471) before final machining of rotating band, 8857480, and 3 sets of parts, for first article testing to the testing facility

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in table I. Tests need not be conducted in order specified in table I.

Table I

First Article Inspections and Tests

Examination or test	Contractor's inspection before submission	Non-Destructive	Parts	Sub-Assembly	Assembly
1. Classification of characteristics (see 4.3.2.1)	X	X	X	X	X
2. Rotating band (see 3.5.1 & 3.5.2)	X	X		X	
3. Leakage (see 3.9)	X	X		X	
4. Pull test when required (see 4.3.3.7)	X	X	X		

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Product acceptance inspection.

4.3.1 Lot formation. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.1 Inspection lot. An inspection lot shall be the quantity of parts, subassemblies, or assemblies from the same lot, which are submitted to inspection for Government acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4.3.2 Product inspection examination. Critical characteristics shall require 100 percent inspection of all items in the inspection lot. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (table II and table III respectively) and inspected for all characteristics in the applicable classification. Any characteristic in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Major characteristic table II

Lot size	Sample size
	100% inspection
1- 155	155
156- 200	175
201- 250	190
251- 300	200
301- 350	210
351- 400	220
401- 450	225
451- 500	230
501- 550	235
551- 600	240
601- 650	243
651- 700	247
701- 750	250
751- 800	254
801- 900	258
901-1000	261
1001-1100	264
1101-1200	266
1201-1300	268
1301-1400	270
1401-1500	272
1501-1600	

Minor characteristic table III

Lot size	Sample size
	100% inspection
1- 25	25
26- 30	26
31- 35	27
36- 40	28
41- 45	29
46- 50	30
51- 55	31
56- 60	32
61- 65	33
66- 70	34
71- 75	35
76- 85	36
86- 95	37
96- 110	38
111- 130	39
131- 156	40
157- 190	41
191- 240	42
241- 340	43
341- 520	44
521-1120	45
1121 and over	

4.3.2.1 Classification of characteristics. Critical, major, and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 8857481
4.3.2.1.1	Body section projectile rear				NEXT HIGHER ASSEMBLY 8857480
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Radius present between large inside diameter and shoulder		100%		Visual
2.	No visible scratches, nicks, or gouges in 63 finish surfaces		100%	3.8	Visual/Manual/Gage
3.	Radius present between thread clearance and shoulder		100%		Visual
Major:					
101.	Diameter of thread clearance		Table II		Gage
102.	Large inside diameter		Table II		Gage
103.	Perpendicularity of large inside diameter		Table II		Gage
104.	Concentricity of large inside diameter		Table II		Gage
105.	Large outside diameter		Table II		Gage
106.	Concentricity of large outside diameter		Table II		Gage
107.	Length of large inside diameter		Table II		Gage
108.	63 finish		Table II		Visual
109.	Parallelism of right inside shoulder		Table II		Gage
110.	Radius between thread clearance and shoulder, max.		Table II		Gage
111.	Depth of chamfer on small outside diameter		Table II		Gage
112.	Small outside diameter		Table II		Gage
113.	Perpendicularity of small outside diameter		Table II		Gage
114.	Length from end to thread		Table II		Gage
115.	Length of thread clearance, max.		Table II		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.3.2.1.1	Body section projectile rear		8857480
			NEXT HIGHER ASSEMBLY 8857480

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
116.	Length from end to outside shoulder		Table II		Gage
117.	Total length		Table II		Gage
118.	Pitch diameter of thread		Table II		Gage
119.	Major diameter of thread, max.		Table II		Gage
120.	Concentricity of pitch diameter of thread		Table II		Gage
121.	Radius between large inside diameter and shoulder, max.		Table II		Gage
122.	Depth of right inside chamfer		Table II		Gage
123.	Material		Table II	3.1; 4.3.3.2.2 4.3.3.3.1	Visual
124.	Marking made with electrolytic process (see dwg 9212670)		Table II	4.3.3.6	Visual
125.	Proper blunt start on thread		Table II		Visual
126.	No torn or damaged thread.		Table II		Visual
Minor:					
201.	Serial number		Table III	3.4.2	Visual
202.	Marking		Table III		Visual
203.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.3.2.1.2	Body section, projectile, center				8857482
					NEXT HIGHER ASSEMBLY 8857480
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Radius present on right and left shoulders shoulders		100%		Visual
2.	No visible scratches, nicks, gouges, or cracks in all 63 finish surfaces		100%	3.8	Visual/Manual/Gage
Major:					
101.	Left outside diameter		Table II		Gage
102.	63 finish		Table II		Visual
103.	Depth of left outside chamfer		Table II		Gage
104.	Fillet radius on left and right shoulder, max.		Table II		Gage
105.	Depth of right outside chamfer		Table II		Gage
106.	Right outside diameter		Table II		Gage
107.	Concentricity of right outside diameter		Table II		Gage
108.	Perpendicularity of right outside diameter		Table II		Gage
109.	Length of right outside diameter		Table II		Gage
110.	Parallelism of right face		Table II		Gage
111.	Total length		Table II		Gage
112.	Perpendicularity of left face		Table II		Gage
113.	Length of left outside diameter		Table II		Gage
114.	Material		Table II	3.1 4.3.3.5	Visual
115.	Marking made with electrolytic process (see dwg 9212670)		Table II		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 8857482
4.3.2.1.2	Body section, projectile, center				NEXT HIGHER ASSEMBLY 8857480
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor:					
201.	Serialization			3.4.2	Visual
202.	Marking		Table III		Visual
203.	Workmanship			3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857483
4.3.2.1.3	Body section, front				NEXT HIGHER ASSEMBLY 8857480
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Radius present between large inside diameter and shoulder		100%		Visual
2.	No visible scratches, nicks, gouges in all 63 surfaces		100%	3.8	Visual/Manual/Gage
Major:					
101.	63 finish		Table II		Gage
102.	Large inside diameter		Table II		Gage
103.	Concentricity of left outside diameter		Table II		Gage
104.	Small outside diameter		Table II		Gage
105.	Radius between large inside diameter and shoulder, max.		Table II		Gage
106.	Perpendicularity of left inside diameter		Table II		Gage
107.	Length of large inside diameter		Table II		Gage
108.	Depth of chamfer		Table II		Gage
109.	Material		Table II	3.1; 4.3.3.2.2 4.3.3.3.1 4.3.3.6	Visual
110.	Marking made with electrolytic process (see dwg 9212670)		Table II		Visual
Minor:					
201.	Serialization		Table II	3.4.2	Visual
202.	Marking		Table II		Visual
203.	Workmanship		Table II	3.15	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.3.2.1.4	Pin, straight headless		8857478-1
			NEXT HIGHER ASSEMBLY
			8857480

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Outside diameter		100%		Gage
Major:					
101.	Length		Table II		Gage
102.	Large chamfer		Table II		Gage
103.	Small chamfer		Table II		Gage
104.	Surface finish		Table II		Gage
105.	Rockwell hardness		Table II		Gage
106.	Material		Table II	3.1 4.3.3.3.2 4.3.3.4	Visual
Minor:					
201.	Tool makers ink present		Table III		Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857484
4.3.2.1.5	Packing preformed				NEXT HIGHER ASSEMBLY 8857480 & 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Axial thickness		Table II	3.6.1	Gage
102.	Inside diameter		Table II	3.6.2	Gage
103.	Split, cracks or improperly formed		Table II		Visual
104.	Surface has no defects, blemishes or irregularities		Table II		Visual
105.	Material		Table II	3.1	Visual
Minor:					
201.	Serialization		Table III	3.4.1	Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857480
4.3.2.1.6	Body				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	BEFORE PIN ASSEMBLY AND FINAL MACHINING (See 6.4)				
Critical:					
1.	Gap in outside joints		100%	3.11; 4.5.2	Gage
2.	Radius present on bottom of holes		100%		Visual
Major:					
101.	Diameter of pin holes		100%		Gage
102.	Depth of left joint pin holes		100%		Gage
103.	Depth of right joint pin holes		100%		Gage
104.	Radius on bottom of pin holes, max.		100%		Gage
105.	Interference fit between holes and pins		100%	3.13; 4.5.3	Gage
106.	Objective evidence available for proper sealing compound see dwg 9212669		100%	6.2	Visual
107.	Sealing compound missing		100%		Visual
Minor:					
201.	Location of left holes		Table III		Gage
202.	Location of right holes		Table III		Gage
203.	Workmanship		Table III	3.15	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.7	Body				8857480
					NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	BEFORE FINAL MACHINING (see 6.4)				
Critical: 1.	Tool makers ink on pins present		100%		Visual
Major: 101.	Depth of pins		100%	3.12	Gage
Minor: 201.	Workmanship		Table II	3.15	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER
4.3.2.1.8	Body				8857480
					NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	No visible scratches, nicks, or gouges		100%	3.8	Visual/Manual
2.	Radius present between right inside diameter and shoulder		100%		Viaual
Major:					
101.	Concentricity of bourrelet diameters		Table II		Gage
102.	Diameter of bourrelets		Table II		Gage
103.	Concentricity of right inside diameter		Table II		Gage
104.	Right inside diameter		Table II		Gage
105.	Concentricity of cavity		Table II		Gage
106.	Contour of cavity		100%		Gage
107.	Radius between right inside diameter and shoulder, max.		Table II		Gage
108.	Length of right inside diameter		Table II		Gage
109.	Parallelism of right face		Table II		Gage
110.	Perpendicularity of right inside shoulder		Table II		Gage
111.	Radius missing between right inside shoulder cavity		Table II		Visual
112.	Depth of cavity		Table II		Gage
113.	Total length		Table II		Gage
114.	Paralleism of bottom of cavity		Table II		Gage
115.	Concentricity of left outside diameter		Table II		Gage
116.	Diameter between bourrelets		Table II		Gage
117.	Diameter of counterbores in left face, max.		Table II		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 8857480
4.3.2.1.8	Body				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
118.	Diameter of countersink in left threaded holes, min.		Table II		Gage
119.	Depth of counterbores in left face, max.		Table II		Gage
120.	Pitch diameter of thread in left holes, max.		Table II		Gage
121.	Minor diameter of thread in left holes, max.		Table II		Gage
122.	Length of left bourrelet, min.		Table II		Gage
123.	Radius between bourrelet diameters and diameter between bourrelets		Table II		Gage
124.	Length of right bourrelet, min.		Table II		Gage
125.	Contour of taper right end.		Table II		Gage
126.	Marking made with electrolytic process (see dwg 9212670)		Table II		Gage
127.	Proper finish		Table II		Visual
128.	No cracks or galling on rolled-over portion of pins		100%	3.10; 4.5.1	10 power magnifier
129.	Proper pin rolling		100%		Visual
Minor:					
201.	Length of left bourrelet, max.		Table III		Gage
202.	Length of right bourrelet, max.		Table III		Gage
203.	Location of 2 tapped holes in left face		Table III		Gage
204.	Marking		Table III		Visual
205.	Serialization		Table III	3.4.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 8857480
4.3.2.1.8	Body				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor: 206.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 8865036
4.3.2.1.9	Adapter body to ogive				NEXT HIGHER ASSEMBLY 8857488
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Pitch diameter of thread in center hole		Table II		Gage
102.	Minor diameter of thread in center hole, max.		Table II		Gage
103.	Diameter of center hole		Table II		Gage
104.	Concentricity of counterbore with pin hole		Table II		Gage
105.	Diameter of counterbore with pin hole		Table II		Gage
106.	Diameter of pin hole		Table II		Gage
107.	Location of pin hole		Table II		Gage
108.	Depth of chamfer on large outside diameter		Table II		Gage
109.	Large outside diameter		Table II		Gage
110.	Concentricity of large outside diameter		Table II		Gage
111.	Length of large outside diameter		Table II		Gage
112.	Total length		Table II		Gage
113.	Small outside diameter		Table II		Gage
114.	Width of curved recessed area		Table II		Gage
115.	Location of counterbores of tapped holes		Table II		Gage
116.	Diameter of counterbore on tapped holes		Table II		Gage
117.	Concentricity of counterbored tapped holes		Table II		Gage
118.	Pitch diameter of counterbored tapped holes		Table II		Gage
119.	Minor diameter of counterbored tapped holes, max.		Table II		Gage

NOTES: See 6.4

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER
4.3.2.1.9	Adapter body to ogive				8865036
					NEXT HIGHER ASSEMBLY 8857488
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
120.	Location of two wide slots in small outside diameter		Table II		Gage
121.	Width of 2 wide slots in small outside diameter		Table II		Gage
122.	Depth of 2 wide slots in small outside diameter		Table II		Gage
123.	Length of slot thru bottom		Table II		Gage
124.	Length of curved recessed area, min.		Table II		Gage
125.	Depth of 2 small slots in small outside diameter		Table II		Gage
126.	Width of 2 small slots in small outside diameter		Table II		Gage
127.	Location of two small slots in small outside diameter		Table II		Gage
128.	Depth of counterbore on tapped holes		Table II		Gage
129.	Depth of full thread in counterbore tapped holes, min.		Table II		Gage
130.	Location of slot thru bottom		Table II		Gage
131.	Width of slot thru bottom		Table II		Gage
132.	Radius missing on slot thru bottom		Table II		Visual
133.	Thickness thru cavity bottom		Table II		Gage
134.	Perpendicularity of top surface (Section B-B)		Table II		Gage
135.	Parallelism of cavity bottom with end surface		Table II		Gage

NOTES:

See 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 8865036
4.3.2.1.9	Adapter body to ogive				NEXT HIGHER ASSEMBLY 8857488
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
136.	Depth of curved recess		Table II		Gage
137.	Depth of thread in center hole, min.		Table II		Gage
138.	Width of angled slot enlargement, max.		Table II		Gage
139.	Inside diameter		Table II		Gage
140.	Concentricity of inside diameter		Table II		Gage
141.	Radius in counterbore of pin hole, max.		Table II		Gage
142.	Depth of counterbore of pin hole		Table II		Gage
143.	Chamfer on pin hole		Table II		Gage
144.	Radii present and sharp corners broken in thru slot		Table II		Visual
145.	Surface finish where noted.		Table II		Visual
146.	Material		Table II	3.1; 4.3.3.2.2 4.3.3.3.1 4.3.3.6	Visual
Minor:					
201.	Serialization		Table III	3.4.2	Visual
202.	Marking		Table III		Visual
203.	Workmanship		Table III	3.15	Visual/Manual

NOTES: See 6.4

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8865037
4.3.2.1.10	Pin				NEXT HIGHER ASSEMBLY 8865036
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Length of left diameter		Table II		Gage
102.	Thickness of flange		Table II		Gage
103.	Total length		Table II		Gage
104.	Correct chamfers		Table II		Gage
105.	Correct radius		Table II		Gage
106.	Diameter of flange		Table II		Gage
107.	Concentricity of right diameter		Table II		Gage
108.	Right diameter		Table II		Gage
109.	Concentricity of left diameter		Table II		Gage
110.	Left diameter		Table II		Gage
111.	Material		Table II	3.1	Visual
Minor:					
201.	Workmanship		Table II	3.15	Visual/Manual

NOTES:

See 6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8865036
4.3.2.1.11	Adapter, body to ogive assembly				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Pin seated in adapter		Table II	3.7	Gage
102.	Marking made with electrolytic process (see dwg 9212670)		Table II		Visual
Minor:					
201.	Serialization		Table III	3.4.2	Visual
202.	Marking		Table III		Visual
203.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

See 6.3

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 8857490
4.3.2.1.12	Ogive				NEXT HIGHER ASSEMBLY 8857489
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Large inside diameter		Table II		Gage
102.	Concentricity (including perpendicularity) of outside surface at basic diameter with large inside diameter		Table II		Gage
103.	Profile of large cavity		Table II		Gage
104.	Location of large basic outside diameter		Table II		Gage
105.	Location of small basic outside diameter		Table II		Gage
106.	Small inside diameter		Table II		Gage
107.	Concentricity of small inside diameter		Table II		Gage
108.	Length of large inside diameter, min.		Table II		Gage
109.	Depth of large cavity		Table II		Gage
110.	Length from end surface to outside shoulder		Table II		Gage
111.	Total length		Table II		Gage
112.	Parallelism of outside shoulder		Table II		Gage
113.	Width of 2 small slots in 3 section thread		Table II		Gage
114.	Location of slots in 3 section thread		Table II		Gage
115.	Width of large slot in 3 section thread		Table II		Gage
116.	Concentricity of intermediate size diameter		Table II		Gage
117.	Intermediate size inside diameter		Table II		Gage
118.	Length of outside diameter behind 3 section thread		Table II		Gage
119.	Pitch diameter of 3 section thread		Table II		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 8857490
4.3.2.1.12	Ogive				NEXT HIGHER ASSEMBLY 8857489
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
120.	Major diameter of 3 section thread, min.		Table II		Gage
121.	Concentricity of thread		Table II		Gage
122.	Diameter behind 3 section thread, max.		Table II		Gage
123.	Diameter of hole thru side		Table II		Gage
124.	Location of hole in thru side		Table II		Gage
125.	Chamfer, radii or spot face present		Table II		Visual
126.	Pitch diameter 6 tapped holes, max.		Table II		Gage
127.	Minor diameter 6 tapped holes, max.		Table II		Gage
128.	Location of 6 tapped holes with window slot		Table II		Gage
129.	Width of slot, max.		Table II		Gage
130.	Location of window slot		Table II		Gage
131.	Symmetry of window flange recess		Table II		Gage
132.	Length of window slot, max.		Table II		Gage
133.	Depth of chamfer on large inside diameter		Table II		Gage
134.	Depth of chamfer on window slot		Table II		Gage
135.	Depth of window flange recess, max.		Table II		Gage
136.	Material		100%	3.1 4.3.3.2.2 4.3.3.3.1	Visual
137.	Surface finish		Table II	4.3.3.6	Visual
138.	Proper blunt start on thread		Table II		Visual
139.	No steps between surfaces indicated		Table II		Visual/Manual
140.	Objective evidence (see 6.2) available for anti-galling coating in accordance with dwg 8857490		Table II	6.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
4.3.2.1.12	Ogive				8857490
					NEXT HIGHER ASSEMBLY
					8857489
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
141.	Anti-galling coating present on threads		Table II		Visual
142.	Marking made with electrolytic process (see dwg 9212670)		Table II		Visual
143.	No cracks, or holes in surfaces which will contact packing in window assembly (see dwg 8857489)		Table II		Visual
Minor:					
201.	Serialization		Table III	3.4.2	Visual
202.	Marking		Table III		Visual
203.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER 8857492
4.3.2.1.13	Plate, retaining, window				NEXT HIGHER ASSEMBLY 8857489
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Total length of outside contour, min.		Table II		Gage
102.	Length of slot, max		Table II		Gage
103.	Width of slot, max		Table II		Gage
104.	Total width of outside contour, min.		Table II		Gage
105.	Diameter of holes, max.		Table II		Gage
106.	Diameter of counterbores, min.		Table II		Gage
107.	Depth of counterbores, min.		Table II		Gage
108.	Depth of chamfer around slot		Table II		Gage
109.	Straightness		Table II		Gage
110.	Thickness, max.		Table II		Gage
111.	Symmetry of outside contour with slot		Table II		Gage
112.	Location of holes		Table II		Gage
113.	Material		Table II		Gage
114.	Objective evidence available for protective finish in accordance with dwg 8857492		Table II	3.1 4.3.3.2.1	Visual
			Table II	6.2	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857491
4.3.2.1.14	Window, observation				NEXT HIGHER ASSEMBLY 8857489
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Total length of outside contour, min.		Table II		Gage
102.	Length of narrow sections, min.		Table II		Gage
103.	Diameter of holes, max.		Table II		Gage
104.	Location of holes.		Table II		Gage
105.	Total width of outside contour, min.		Table II		Gage
106.	Width of narrow sections, min.		Table II		Gage
107.	Total thickness, min.		Table II		Gage
108.	Thickness of flange, min.		Table II		Gage
109.	Material		Table II	3.1	Visual
110.	Transparencey not impaired by imperfections		Table II		Visual
111.	No cracks in flange around holes.		Table II		Visual
112.	Protective finish missing		Table II		Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.15	Ogive assembly (prior to assembling window, observation)				8857489
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major: 101.	Surfaces which will contact packing are clean, free from holes or cracks		Table II		Visual
Minor: 201	Workmanship		Table III	3.15	Visual

NOTES:

See Note 2 of Drwg 8857489

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.16	Ogive assembly				8857489
					NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Torque on 6 screws, min		Table II		Gage
102.	Sealing compound present		100%		Visual
103.	Window contour conforms to outside contour of ogive		100%		Manual/Manual
104.	Window not cracked, transparencey not impaired by imperfections		100%		Visual
105.	Objective evidence available for sealing compound in accordance with dwg 8857489		100%	6.2	Visual
106.	Objective evidence available for pre-formed packing in accordance with MS9021-19		100%	6.2	Visual
107.	Objective evidence available for screw in accordance with MS16995-3		100%		Visual
Minor:					
201.	Marking made with electrolytic marking (see dwg 9212670)		Table III		Visual
202.	Serialization		Table III	3.4.2	Visual
203.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9216409
4.3.2.1.17	Blank, rotating band				NEXT HIGHER ASSEMBLY 8857471
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Inside diameter, max.		Table II		Gage
102.	Length, min.		Table II		Gage
103.	Material		Table II	3.1	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.18	Base, projectile (after finish machining of rotating band groove)	1 OF 1	8857471
			NEXT HIGHER ASSEMBLY 8857487

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major:					
101.	Width of rotating band groove		Table II		Gage
102.	Small diameter of rotating band groove		Table II		Gage
103.	Projections present and undamaged; correct number on bottom of rotating band groove		Table II		Visual
104.	Notches in projections on bottom of rotating band groove present and correctly spaced		Table II		Visual
105.	Material		Table II	3.1 4.3.3.2.1	Visual
Minor:					
201.	Workmanship		Table II	I 3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.3.2.1.19	Base				8857471
					NEXT HIGHER ASSEMBLY
					8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Outside diameter		Table II		Gage
102.	Inside diameter adjacent to thread, max.		Table II		Gage
103.	Small inside diameter		Table II		Gage
104.	Concentricity of small inside diameter		Table II		Gage
105.	Width of outside thread clearance, max.		Table II		Gage
106.	Length to shoulder adjacent to outside thread		Table II		Gage
107.	Total length		Table II		Gage
108.	Radius between inside diameter and bottom of cavity		Table II		Gage
109.	Concentricity of inside thread		Table II		Gage
110.	Pitch diameter of inside thread		Table II		Gage
111.	Minor diameter of inside thread, max.		Table II		Gage
112.	Length of full inside thread, min.		Table II		Gage
113.	Depth to small inside diameter		Table II		Gage
114.	Depth of cavity		Table II		Gage
115.	63 finish		Table II		Visual
116.	Pitch diameter of outside thread		Table II		Gage
117.	Major diameter of outside thread, min.		Table II		Gage
118.	Total length of rotating band		Table II		Gage
119.	Diameter of band between 2 small grooves		Table II		Gage
120.	Diameter of 2 small grooves		Table II		Gage
121.	Diameter of wide groove in rotating band		Table II		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 8857471
4.3.2.1.19	Base				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
122.	Diameter left of, and adjacent to, rotating band		Table II		Gage
123.	Diameter of hand left of and adjacent to large groove		Table II		Gage
124.	Largest outside diameter of rotating band		Table II		Gage
125.	Rotating band		Table II	3.5.3	Gage
126.	Marking in accordance with dwg 9212670		Table II		Visual
127.	Proper blunt start of thread		Table II		Visual
Minor:					
201.	Serialization		Table III	3.4.2	Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857553
4.3.2.1.20	Screw, cap, socket head				NEXT HIGHER ASSEMBLY 8857487
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major: 101.	Objective evidence available for part in accordance with dwg 8857553		100%	6.2	Visual
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 8857487
4.3.2.1.21	Body-ogive matched machined				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	Visible scratches, nicks, or gouges		100%	3.0	Visual/Manual
2.	Radius present on bottom of pin holes		100%		Visual
Major:					
101.	Angular location of hole through ogive from counter bored tapped holes in adapter and pin holes		Table II		Gage
102.	Diameter of two pin holes in right face of body		Table II		Gage
103.	Depth of two pin holes in right face of body		Table II		Gage
104.	Perpendicularity of 2 pin holes in right face of body		100%	3.14	Manual
105.	Location of line on right body		100%	4.4.9; 4.5.4	Visual
106.	Depth of pin holes		100%		Gage
107.	Radius on bottom of pin holes, max.		Table II		Gage
108.	Diameter of pin holes		100%		Gage
109.	Interference fit of pin and hole.		100%	3.13.2 4.5.4	Gage
110.	Location of body-adapter holes from joint		Table II		Gage
111.	Location of adapter-ogive holes from joint		Table II		Gage
112.	Mark "X" missing or unidentifiable by aligning holes		Table II		Visual
113.	Marking made by electrolytic process specified on dwg 9212670		Table II		Visual

NOTES:

See 6.4

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AP)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 8857487
4.3.2.1.21	Body-ogive matched machined				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
114.	Marking		Table II		Visual
115.	Serial number		Table II	3.4.2	Visual
116.	Relationship of cap screw to length of threaded holes		100%		Gage
117.	Torque on 2 left screws		Table II	4.5.5	Gage
118.	Objective evidence available for anti-seize compound in accordance with dwg 8857487		100%	6.2	Visual
119.	Anti-seize compound present before assembly of base		Table II		Visual
120.	Torque on base assembled without packing preformed		100%	4.5.6	Gage
121.	Correct gap with base assembled without packing preformed		100%	4.5.6	Gage
122.	Serial number suffix added before final assembly		Table II		Visual
123.	Objective evidence available for proper silicone fluid in accordance with dwg 8857487		100%	6.2	Visual
124.	Silicone fluid present on packing before assembly		100%		Visual
125.	Gap between body and base after base assembly		100%	4.5.6	Gage
126.	Ogive window not damaged		Table II		Visual
127.	Rotating band		100%	3.5.3	Visual/Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 8857487
4.3.2.1.21	Body-ogive matched machined				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8883534
4.3.2.1.22	Bag, packing, for repair parts				NEXT HIGHER ASSEMBLY 8861953
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Material		100%	3.1	Visual
102.	Length before packing, min.		Table II		*Measure
103.	Width before packing, min.		Table II		*Measure
104.	Objective evidence available for heat seal test in accordance with MIL-P-116		100%		Visual/Manual
105.	Properly packed		Table II		Visual
106.	No tear, split or crack in bag		Table II		Visual
Minor:					
201.	Marking		Table III		Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

See section 5 * Measure with suitable scale

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857477
4.3.2.1.23	Insert, screw thread				NEXT HIGHER ASSEMBLY 8857437
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Outside diameter		Table II		Gage
102.	Concentricity of outside diameter		Table II		Gage
103.	Pitch diameter of threaded hole		Table II		Gage
104.	Minor diameter of threaded hole, max.		Table II		Gage
105.	Total length		Table II		Gage
106.	Surface finish on outside diameter		Table II		Gage
107.	Rockwell hardness		Table II		Gage
108.	Chamfer present		Table II		Gage
109.	Material		100%	3.1	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8857437
4.3.2.1.24	Insert-screw assembly				NEXT HIGHER ASSEMBLY 8861953
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Depth of screw		Table II		Gage
102.	Total length after grinding		Table II		Gage
103.	Epoxy present		Table II		Manual/Visual
104.	Screw flush or below flush		Table II		Manual/Visual
105.	Objective evidence available for epoxy adhesive compliance with dwg 8857437		100%	6.2	Visual
106.	Objective evidence available for set screw, socket, flat point compliance with MS51026-64 before assembly		100%	6.2	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.25	Clutch half, positive				8857479
					NEXT HIGHER ASSEMBLY 8857439
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Diameter of body		Table II		Gage
102.	Diameter of groove		Table II		Gage
103.	Concentricity of groove diameter		Table II		Gage
104.	Length to groove		Table II		Gage
105.	Width of groove		Table II		Gage
106.	Depth of hex hole, min.		Table II		Gage
107.	Total length		Table II		Gage
108.	Parallelism of end surface		Table II		Gage
109.	Length of flange		Table II		Gage
110.	Perpendicularity of flange shoulder		Table II		Gage
111.	Diameter of hole in flange		Table II		Gage
112.	Width across flats of hex, hole, min.		Table II		Gage
113.	Location of hole in flange		Table II		Gage
114.	Material		100%	3.1	Visual
115.	Objective evidence available for protective finish in accordance with dwg 8857479		100%	6.2	Visual
Minor:					
201.	Marking		Table III		Visual
202.	Radius missing		Table III		Visual
203.	Workmanship		Table III		Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.26.	Pin, straight, headless	1 OF 1	8857545
			NEXT HIGHER ASSEMBLY 8857439

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Diameter		Table II		Gage
102.	Finish on diameter		Table II		Gage
103.	Rockwell hardness		Table II		Gage
104.	Material		100%	3.1	Visual
105.	Objective evidence available for protective finish in accordance with dwg 8857545		100%	6.2	Visual
Minor:					
201.	Radius or chamfer present		Table III		Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.3.2.1.27	Clutch half positive		8857439
			NEXT HIGHER ASSEMBLY 8861953

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Length of projection of pin		Table II		Gage
102.	Pin tight		Table II		Manual
Minor:					
201.	Dots present and identifiable		Table III		Visual
202.	Marking		Table III		Visual
203.	Workmanship		Table III		Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.28	Key, machine	1 OF 1	8857543
			NEXT HIGHER ASSEMBLY: 8861953

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Thickness		Table II	3.1	Gage
102.	Material		Table II	4.3.2.1	Visual
103.	Objective evidence available for protective finish in accordance with dwg 8857543		Table II	6.2	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.29	Screw, self locking				8882034
					NEXT HIGHER ASSEMBLY
					8861953
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Pitch diameter of thread		Table II		Gage
102.	Major diameter of thread, min.		Table II		Gage
103.	Nylon pellet present		Table II		Visual
104.	Material		100%	3.1	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.3.2.1.30	Insert, pin		8881785
			NEXT HIGHER ASSEMBLY 8881787

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Outside diameter		Table II		Gage
102.	Concentricity of outside diameter		Table II		Gage
103.	Total length		Table II		Gage
104.	Total depth of threaded cavity		Table II		Gage
105.	Depth of thread		Table II		Gage
106.	Diameter of thread clearance		Table II		Gage
107.	Pitch diameter of thread, max.		Table II		Gage
108.	Minor diameter of thread, max.		Table II		Gage
109.	Finish on outside diameter		Table II		Gage
110.	Rockwell hardness		Table II		Gage
111.	Chamfer present		Table II		Visual
112.	Center drill hole in rear face present		Table II		Visual
113.	Material		100%	3.1 4.3.3.2.1	Visual
Minor:					
201.	Workmanship		Table II	I 3.15	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8881786
4.3.2.1.31	Set screw (mod)				NEXT HIGHER ASSEMBLY 8881787
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Depth of slot		Table II		Gage
102.	Width of slot		Table II		Gage
103.	Rockwell hardness		Table II		Gage
104.	Objective evidence available for screw in accordance with dwg 8881786		100%	6.2	Visual
Minor:					
201.	Workmanship		Table II	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8881787
4.3.2.1.32	Insert pin assembly				NEXT HIGHER ASSEMBLY 8861953
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major: 101.	Torque		Table II		Gage
Minor: 201.	Workmanship		Table III		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AF)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER NAS1081C4A4N MS29513-240
4.3.2.1.33	Screw, self-locking				NEXT HIGHER ASSEMBLY 8861953
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major: 101.	Objective evidence available for part in accordance with applicable standard		100%	6.2	Visual
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.3.2.1.34	Carton, packing, ammunition, for hardware for projectile: M454				8861953
					NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	BEFORE CLOSING COVER				
Critical:	None defined.				
Major:					
101.	Proper carton		100%	3.1	Visual
102.	Objective evidence available for gummed paper tape, cushioning material, pressure sensitive tape, and small bag material in accordance with applicable specifications		100%	5 6.2	Visual
103.	Length of small bag before packing, min.		Table II	5	*Measure
104.	Width of small bag before packing, min.		Table II	5	*Measure
105.	Small bags properly packed and sealed		Table II	5	Visual
106.	Carton properly packed		Table II	5	Visual
107.	No item missing		Table II	5	Visual
108.	Marking of small bags		Table II	5	Visual
109.	No bag perforated		Table II	5	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

* Measure with suitable scale.

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AF)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.35	Carton, packing, ammunition, for hardware for projectile: M454	1 OF 1	8861953
			NEXT HIGHER ASSEMBLY 8850175

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Properly sealed		Table II	5	Visual
102.	Label present and proper		Table II	5	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.3.2.1.36	Protector, thread, base		9206165
			NEXT HIGHER ASSEMBLY 8850175

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Material		Table II	3.1	Visual
Minor:					
201.	Inside diameter		Table III		Gage
202.	Width		Table III		Gage
203.	Length of overlap when present		Table III		Gage
204.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 8857432
4.3.2.1.37	Retainer, test plug				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Inside diameter of large o-ring groove		Table II		Gage
102.	Profile of tapered cavity, min.		Table II		Gage
103.	Inside diameter between tapered cavity and thread, min.		Table II		Gage
104.	Pitch diameter of thread		Table II		Gage
105.	Minor diameter of thread, max.		Table II		Gage
106.	Inside diameter adjacent to small o-ring groove, min.		Table II		Gage
107.	Inside diameter of small 0-ring groove		Table II		Gage
108.	Width of wrench flat grooves, min.		Table II		Gage
109.	Total length, min.		Table II		Gage
110.	Outside contour		Table II		Visual
111.	Distance across wrench flats		Table II		Gage
112.	Length to large o-ring groove, min.		Table II		Gage
113.	Width of large o-ring groove		Table II		Gage
114.	Depth to bottom of tappered cavity, min.		Table II		Gage
115.	Depth to thread, min.		Table II		Gage
116.	Depth of thread cavity		Table II		Gage
117.	Length to small o-ring groove, min.		Table II		Gage
118.	Width of small o-ring groove		Table II		Gage
119.	Depth of cavity adjacent to small o-ring groove, min.		Table II		Gage
120.	Chamfer or radius present		Table II		Visual
121.	Material		100%	3.1	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 8857432
4.3.2.1.37	Retainer, test plug				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major:					
122.	Blunt start on thread		Table II		Visual
Minor:					
201.	Finish		Table III		Visual
202.	Marking; metal not raised by stamping		Table III		Visual/Manual
203.	Serialization		Table III	3.4.2	Visual
204.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

59

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8850104
4.3.2.1.38	Container, shipping and storage: M467				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major: 101.	Objective evidence available for container fabricated in accordance with MIL-C-14672		100%	6.2	Visual
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

09

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER 8790670-3 8794342
4.3.2.1.39	Desiccant and seal, metallic		NEXT HIGHER ASSEMBLY 8850175

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined				
Major: 101.	Objective evidence available for proper part in accordance with applicable dwg		100%	5 6.2	Visual
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS MIL-B-14984 A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8865534
4.3.2.1.40	Handling device, projectile, H4220				NEXT HIGHER ASSEMBLY 8850175
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Objective evidence available for handling device fabricated in accordance with MIL-H-14705		100%	5 6.2	Visual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.3.2.1.41	Contr., shipping and storage: M467 pkg., and mkg., for ORD components for projectile:M454 before closing cover.				8850175
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:					
1.	No visible scratches on projectile and projectile parts before assembling handling device		100%	3.8	Visual/Manual/Gage
Major:					
101.	Objective evidence available for proper material: Envelope, vapor barrier; chip board; cushioning material, bound; Enamel Ind, stencil; Talcum powder; Tape, pressure sensitive in accordance with applicable specification		100%	6.2	Visual
102.	Diameter of holes in shipping bracket		Table II		*Measure
103.	Total height of shipping bracket		Table II		*Measure
104.	Length of formed section of shipping bracket		Table II		*Measure
105.	Thickness of shipping bracket		Table II		*Measure
106.	Talcum powder present		Table II		Visual
107.	Carton properly packed		Table II		Visual
108.	Handling device properly assembled		Table II		Visual
109.	Assembly of projectile, clamps and shipping bracket		Table II		Visual
110.	Torque on clamp screws		Table II		Gage
111.	Straps secured with tape		Table II		Visual
112.	Desiccant present and properly packed		Table II		Visual
113.	Maintenance log present and properly packed		Table II		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.41	Contr., shipping and storage: M467 pkg., and mkg., for ORD components for projectile: M454 before closing cover	2 OF 2	8850175
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major: 114.	Flange gasket not dirty, without nicks, cracks or other damage		Table II		Visual
Minor: 201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T05:18Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.42	Contr, shipping and storage: M467 pkg., and mkg., for ORD components for proj. M454	1 OF 1	8850175
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Latches secure		Table II		Visual/Manual
102.	Metallic seals present and properly assembled		Table II		Visual/Manual
103.	Lock nuts securing cap screws on skids completely engaged		Table II		Visual
104.	No opening in container or damage which would destroy pressure seal		Table II	5.1	Visual
Minor:					
201.	Marking		Table III	5.3	Visual
202.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.43	Box, packing, ammo., for interplant shipment of metal parts for projectile: M454	1 OF 1	9204488
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	BEFORE CLOSING COVER				
Critical:	None defined.				
Major:					
101.	Wrapper present on body ogive assembly		Table II	5.2	Visual
102.	End fillers present		Table II	5.2	Visual
103.	Heat seal proper on bags		Table II	5.2	Visual
104.	No component missing		Table II	5.2	Visual
105.	Packing list present		Table II	5.2	Visual
106.	Saddles properly assembled		Table II	5.2	Visual
107.	Body ogive assembly tight in container		Table II	5.2	Manual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.3.2.1.44	Box, pkg., ammo., for interplant shipment of metal parts for projectile: M454	1 OF 1	9204488
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical:	None defined.				
Major:					
101.	Cover tight		Table II	5	Visual/Manual
102.	Proper strapping		Table II	5	Visual/Manual
103.	No loose contents in box		Table II	5	Manual
Minor:					
201.	Workmanship		Table III	3.15	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4.3.3 Testing. The contractor shall perform all the tests specified in this paragraph. Tests do not have to be performed in the order specified.

	Test	Test classification
a.	Rotating band	Critical
b.	Tensile test	Critical
c.	Charpy test	Critical
d.	Shear test	Critical
e.	Physical properties	Critical
f.	Compression test	Critical
g.	Pull	Major
h.	Leakage	Major

Test a is considered destructive when parts are used for samples. Parts so tested shall not be returned to the lot. These parts or assemblies are over and above the deliverable quantities required by the contract.

4.3.3.1 Rotating band (see dwg 8857471).

4.3.3.1.1 Physical properties and seating (see 3.5.1 and 3.5.2). Prior to finish machining rotating bands, a sample shall be selected and tested in accordance with 4.4.1.1. If the sample fails to comply with the requirements 3.5.1 and 3.5.2 the lot of bases shall be rejected.

4.3.3.1.2 Damage (see 3.5.3). Each finished machined rotating band shall be inspected as specified in 4.4.1.2. If any rotating band fails to comply with requirement 3.5.3, the base shall be rejected and removed from the lot.

4.3.3.2 Tensile test.

4.3.3.2.1 Tensile test (see dwgs 8857543, 8857477, 8857492 and 8881785). A test specimen shall be prepared and tested as specified in 4.4.10. If the test specimen fails to comply with drawing requirements the lot of parts shall be rejected.

4.3.3.2.2 Tensile test (see dwgs 8857481, 8857483, 8857488, 8857490 and 8857471). Test specimens shall be prepared and tested in accordance with Specification MIL-T-46035. If any sample fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.3.3.3 Charpy test.

4.3.3.3.1 Charpy test (see dwgs 8857481, 8857483, 8857471, 8857488 and 8857490). Test specimens shall be prepared and tested in accordance with MIL-T-46035. If any sample fails to comply with drawing requirements the heat treated lot shall be rejected.

4.3.3.3.2 Charpy test (see dwg 8857478). A test specimen shall be prepared and tested as specified in 4.4.11. If any test specimen fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.3.3.4 Shear stress (see dwg 8857478). One sample shall be selected at random from each heat treated lot and tested as specified in 4.4.12. Any sample which does not comply with drawing requirements shall reject the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4.3.3.5 Physical properties (see dwg 8857482). Samples shall be selected and tested as specified in paragraph 4.4.13. Any part whose samples do not meet drawing requirements shall be removed from the lot.

4.3.3.6 Compressive test (see dwgs 8857481, 8857483, 8857488, 8857490 and 8857471). Test specimens shall be prepared and tested in accordance with 4.4.14 when required as specified on the drawing. If any sample fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.3.3.7 Pull test (see dwg 9206165). A sample shall be selected at random from each inspection lot in accordance with table IV and tested in accordance with 4.4.15 when the protector is made with overlap method. If any item in the sample fails to comply with drawing requirements, the lot shall be rejected.

Table IV
Sample size for inspection lots

Lot Size	Sample Size for No Failures
1- 25	100% Inspection
26- 30	25
31- 35	26
36- 40	27
41- 45	28
46- 50	29
51- 55	30
56- 60	31
61- 65	32
66- 70	33
71- 75	34
76- 85	35
86- 95	36
96- 110	37
111- 130	38
131- 155	39
156- 190	40
191- 240	41
241- 340	42
341- 520	43
521-1120	44
1121 and over	45

4.3.3.8 Leakage (see 3.9). Each assembly shall be tested as specified in 4.4.5 and shall comply with the requirements of 3.9. Any assembly which does not meet these requirements will be classified defective and removed from the lot.

4.3.4 Acceptance inspection equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4.3.4.1 Critical and major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL). EL's for assemblies are listed on the Equipment Tabulation, ET-8857487. When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment. The contractor shall obtain approval of such designs, operating instructions, and special calibration instructions as specified in 6.3 prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired.
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL.

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on EL's. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Rotating band (see 3.5).

4.4.1.1 Band seating and physical properties (see 3.5.1 and 3.5.2). Prior to removal the unmachined band shall be measured on three diameters 120 degrees apart. At each of the three diameters, measurements along the width of the band shall be taken at stations 1, 2, and 3, totaling 9 measurements in all. Stations 1 and 3 are 5/16 inch from the ends, and Station 2 is at the center. The location of the points of measurement shall be marked on the band along with the orientation of the band with the base. The band shall be removed in a manner that will keep deformation to a minimum. After removal, the thickness of the band shall be measured at each of the marked points (a total of 18 measurements) and the diameter of the band seat at these points shall also be measured. To each of the band seat diameters add the sum of the corresponding two band thicknesses and subtract from the corresponding diameter previously determined. The result will indicate the diametral clearance between the band and its seat as indicated in 3.5.2. If the band is well seated, a negative clearance or interference may be indicated. When irregular band profiles interfere with measurement, the manufacturer is authorized to machine the outside of the band in order to obtain an adequate cylindrical surface. The diameter of the machined band shall exceed the bourrelet diameter. Since a piece must be destroyed to test clearances, a dummy

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

component of similar material will be used for the test providing the dimensions of the band seat are within dwg. 8857471 each time a band is tested. The machine settings and data used in banding the dummy component or scrap piece shall be the same as the lot being banded. One specimen shall be tested for every 50 pieces or less produced or when a new lot of band blanks is used. A maximum of 6 cuts in the rotating band are permissable across the band seat in the test piece. The removed band shall be carefully flattened without hammering and test coupons shall be machined and tested in accordance with Federal Test Method Standard No. 151 except the overall length specified for the specimen shall be determined by the contractor.

4.4.1.2 Damage (see 3.5.3). An impression with "cast stone" (or grey stone) shall be taken of each nick, scratch, dent or gouge to determine the depth of the imperfection by an optical comparator type device or any accurate measuring device approved by US Army Armament Research and Development Command, Dover, New Jersey 07801 ATTN: DRDAR-OAN-I. For allowable depth of the imperfection see Figure I. In addition, the rotating band shall be visually inspected for any crack or foreign matter embedded in the rotating band.

4.4.2 Preformed packing (see 3.6).

4.4.2.1 Axial thickness (see 3.6.1). An approved micrometer equipped with 1/4" dia. ball points shall be used to determine axial thickness (Dim B). In employing this instrument the tips are closed, the O-ring (or section thereof) allowed to rest on the tips, and the tips very carefully separated until the ring falls through of its own weight. Three measurements shall be taken at points approximately 120 degrees apart around the circumference.

4.4.2.2 Inside diameter (see 3.6.2). The inside diameter shall be measured by an approved stepped cone employing no stress in applying in excess of that necessary to overcome the ellipticity of the ring.

4.4.3 Metal to metal contact (see 3.7). Measure the length of the forward diameter of the pin to the nearest .0001 inch. Measure the length of the pin hole in the adapter to the nearest .0001 inch. Subtract the length of the forward diameter of the pin from the length of the hole in the adapter. Measure the actual depth of the pin hole after assembly to the nearest .0001 inch.

4.4.4 Repaired scratches (see 3.8). Any visible scratch, nick, or gouge in a No. 63 finish shall be examined and repaired if necessary, with the following procedure:

1. Remove paint with paint remover, if necessary.
2. Clean area of surface of the imperfection with a brush or an air hose.
3. If the visible scratch cannot be felt with a thumb nail on a 63 finish surface, ignore it. (see 3.8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4. If the imperfection can be felt with the thumbnail, make an impression with "cast stone" (or grey stone) and determine the depth of the imperfection by a comparator type device or any other accurate noncontact measuring device approved by US Army Armament Research and Development Command, Dover, New Jersey 07801 ATTN: DRDAR-QAN-I.
5. If the imperfection is deeper than .008 inch deep reject the component (see 3.8).
6. If the imperfection is located near a fillet, chamfer, thread, or radii (see 3.8) and deeper than .005 inch on base, rear body and forward body or is greater than .003 inch deep on the center body, reject the component.
7. If the imperfection is felt by the thumbnail test but is less than previously defined depth depending on location, the imperfection shall be repaired as follows:
   a. Use 240 abrasive grit size emery cloth or finer grit size with a suitable holder such as a wooden dowel or a soft metal dowel (aluminum, brass, etc.), of no greater diameter than 1/2 inch, and rub lightly until the imperfection appears to be removed. Maximum width of the repaired imperfection shall be 0.1 inch and maximum accumulated length of repaired imperfections on center body shall be 20 inches (see 3.8).
   b. Take cast stone impression and proceed to measure area as described in step 4.
   c. If the imperfection is still present, continue steps a and b until it is removed.
   d. Accept or reject the component as specified in 3.8.
   e. Retain the first and last cast stone impressions for inspection records until projectile is shipped to stockpile.

4.4.5 Leakage (see 3.9). All openings in the cavity of the assembly shall be sealed with removable seals. The cavity shall be then pressurized to 4.5 ± 0.5 psig, as indicated by a pressure measuring device which has a resolution of 0.1 pound per square inch. The air supply shall be shut off. An indicated pressure drop in excess of 0.1 psig on the pressure measuring device from the original reading after a minimum of 10 minutes time interval, after the air is shut off, shall be cause for non-compliance with requirements, as specified in 3.9.

4.4.6 Gap in outside joints (see 3.11). The gap shall be measured as specified on drawing 8857480. The procedure and equipment used in measuring the gap shall be approved by

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

US Army Armament Research and Development Command, Dover, New Jersey 07801 ATTN: DRDAR-QAN-I. Dimensions and calculations shall be recorded.

4.4.7 Pin seated on bottom of hole (see 3.12). Measure depth of hole to the nearest .001 inch and record. Measure length of pin to be used to nearest .001 inch and record. Subtract the measured length of pin from the measured depth of hole and record. After pin assembly measure depth of pin below flush to nearest .001 inch.

4.4.8 Perpendicularity of two alignment holes (see 3.14). The adapter shall be assembled to the body with two pins .1250 + .0001 inch diameter in the two alignment holes. The adapter shall then be removed with the pins in place.

4.4.9 Location of etched line on forward body (see dwg 8857487). The electrolytic etch line on the forward end of the body shall be applied utilizing a US Army Armament Research and Development Command approved fixture. The fixture shall consist of a plug equal in diameter to the minimum small forward diameter of the ogive; a fixed key equal in width to the minimum width of the wide slot in the ogive; and a sliding knife edge of .005 radius located angularly in relation to the plug and the key in accordance with drawing requirements within ± 0° 2 min. The body, adapter, and ogive shall be assembled on the fixture so the "X" marked pin holes are aligned, and snug fit pins shall be inserted in a body-adapter pin hole and an ogive-adapter pin hole, and the etch line shall be located utilizing the knife edge of the fixture.

4.4.10 Tensile test (see 4.3.3.2.1). The test specimen shall be selected at random from stock during the production run of parts and shall be included with each heat treated lot of parts. After heat treatment the specimen shall be prepared in accordance with Federal Test Method Standard No. 151, test method 211.1. The specimen shall be tested on approved test equipment.

4.4.11 Charpy test (see 4.3.3.3.2). A test specimen shall be selected at random from stock during the production run and shall be included with each heat treated lot of parts and tested in accordance with Federal Test Method Standard No. 151, Test Method 221.1. The test specimen shall be tested on test equipment as specified in Specification 4.5.2.3 MIL-T-46035.

4.4.12 Shear test (see 4.3.3.4). Two suitable test specimens shall be prepared and tested on approved equipment and comply with drawing requirements.

4.4.13 Physical properties (see 4.3.3.5). Samples shall be prepared and tested in accordance with material specification on drawing and shall comply with all requirements in the specification.

4.4.14 Compressive test (see 4.3.3.6). At least two compression test specimens shall be taken from each heat treated lot. The test specimens shall be approximately 3/8 inch in diameter and 3/4 inch in length taken in the transverse

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

direction. The compressive strength shall be determined by the offset method by plotting a stress-strain diagram. The limiting offset shall be 0.10 percent. Unless otherwise approved by the procuring activity, the strain rate shall not exceed 0.005 in./in./min. The compression test shall be conducted in accordance with ASTM Designation E9-61, Compression Testing of Metallic Materials.

4.4.15 Pull test (see 4.3.3.7). A sample shall be selected at random from each inspection lot in accordance with Table IV. Each item in the sample shall be pulled and held in the pulled condition as specified on the drawing and shall comply with drawing requirements.

4.5 Mandatory government inspection.

4.5.1 Rolling process (see 3.10).

4.5.1.1 Machine (see 3.10.1). The Government inspector certify before releasing the machine for production use that: production operational procedures have been established and approved; calibration procedures have been established and approved.

4.5.1.2 Tooling (see 3.10.2). The Government inspector shall determine that the tool has been certified. The Government inspector shall witness each tool set up and certify that it comforms to drawing 9212668 requirements.

4.5.1.3 Test piece.

4.5.1.3.1 Test piece to establish machine data (see 3.10.3.1, 3.10.1 and 3.10.3.2). The Government inspector shall witness the processing of the test piece to certify: the test piece conforms to specifications (see 3.10.3.1) operational procedures established have been followed (see 3.10.1) and the machine data established was used in processing the test piece (see 3.10.3.2). The Government inspector shall witness the testing of the test piece and certify requirements of 3.10.3.2 have been met.

4.5.1.3.2 Test piece to verify machine data (see 3.10.3.1 and 3.10.3.3). The Government inspector shall witness the processing of the test piece to assure compliance with requirements 3.10.3.1 and 3.10.3.3.

4.5.1.4 Production (see 3.10.1). The Government inspector shall witness all machine calibrations to certify that established procedures have been followed.

4.5.1.5 Machines without recorded data (see 3.10.1 and 3.10.3.2). The Government inspector shall witness the production operation of each pin rolled and certify that: the operating and calibrating procedures established have been followed and the machine data conforms to the data established.

4.5.1.6 Machines with recorded data (see 3.10.3.2). The Government inspector shall verify by checking the records of each assembly that the production data conforms to the established machine data. The Government inspector shall certify that the machine complied with calibration requirements for the assemblies processed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

4.5.2 Gap in outside joints (see 3.11). The Government inspector shall witness this operation and certify that procedures and requirements have been met.

4.5.3 Interference fit of pins (see 3.13). The Government inspector shall witness all required inspections and certify that the assembled pin complies with 3.13, note 4 dwg 8857480 and note 16 dwg 8857487.

4.5.4 Location of etched line on forward body (see 4.4.9). The Government inspector shall witness and certify that the proper fixture is used and the method specified in 4.4.9 is followed.

4.5.5 Assembly of 2 screws (see dwg 8857487). The Government inspector shall witness the assembly procedure in accordance with dwg 8857487 and shall certify that proper procedure was used.

4.5.6 Assembly of base (see dwg 8857487). The Government inspector shall witness the assembly of the base and certify that proper procedure was used.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The projectile components shall be packaged in accordance with dwg 8850175 using the specified moisture barrier.

5.1.2 Level C. The projectile components shall be packaged in accordance with dwg 8850175 except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The projectile components shall be packed in accordance with dwg 8850175.

5.3 Marking. Marking shall be as specified on dwg 8850175.

5.4 Data cards. Data card information for the following parts shall be in accordance with Specification MIL-STD-1167:

Dwg No.
8857481
8857482
8857483
8857488
8865036
8865037
8857490
8857491
8857543
8857471

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

5.5 Box, pkg., ammo., for interplant shipment of metal parts for projectile: M454 (see dwg 9204488). When metal parts are shipped between arsenal or plants, preservation, packaging and packing shall be in accordance with dwg 9204488 and is indicated herein. This method of packing for shipment shall be used only when authorized by the contracting officer.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment. The contractor shall obtain approval of equipment designs, operating instructions, and calibration instructions from the Commanding Officer US Army Armament Research and Development Command, Dover, New Jersey 07801, Attention: DRDAR-OAN-I.

6.4 Submission of inspection data. One copy of inspection records of the designated parts shall be forwarded to Energy Research and Development Authority, Amarillo Branch Office, Pantex Plant, Mason and Hanger, Silco Mason Company, Incorporated, P.O. Box 647, Amarillo, Texas, ATTN: Ouality Control Manager, Mason and Hanger.

Part No.	Applicable paragraph
8857480	4.3.2.1.6
8857480	4.3.2.1.7
8857480	4.3.2.1.8
8857480	4.3.2.1.9
8865037	4.3.2.1.10
8865036	4.3.2.1.11
8857487	4.3.2.1.21

6.5 Instructions for first article inspection (see 4.2.1). Parts may be used in subassemblies if the examination or tests (see 4.2.2, Table I) are verified by a representative designated by the Government. Subassemblies may be used in final assemblies if the examination or tests (see 4.2.2 Table I) are verified by a representative designated by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

6.6 Drawings and specifications. Drawings and specifications listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings and specifications prepared by and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

Custodian:
Army - AR

Preparing Activity:
Army - AR

Project No.: 1110-A156

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-B-14984A Body-Ogive Matched Machined Assembly for M454 Projectile

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:18Z
Check the source to verify that this is the current version before use.