MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, PIN CONTACTS, 12, 16, 20, 28, 40, 60, 70, 80, 100, AND 130 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

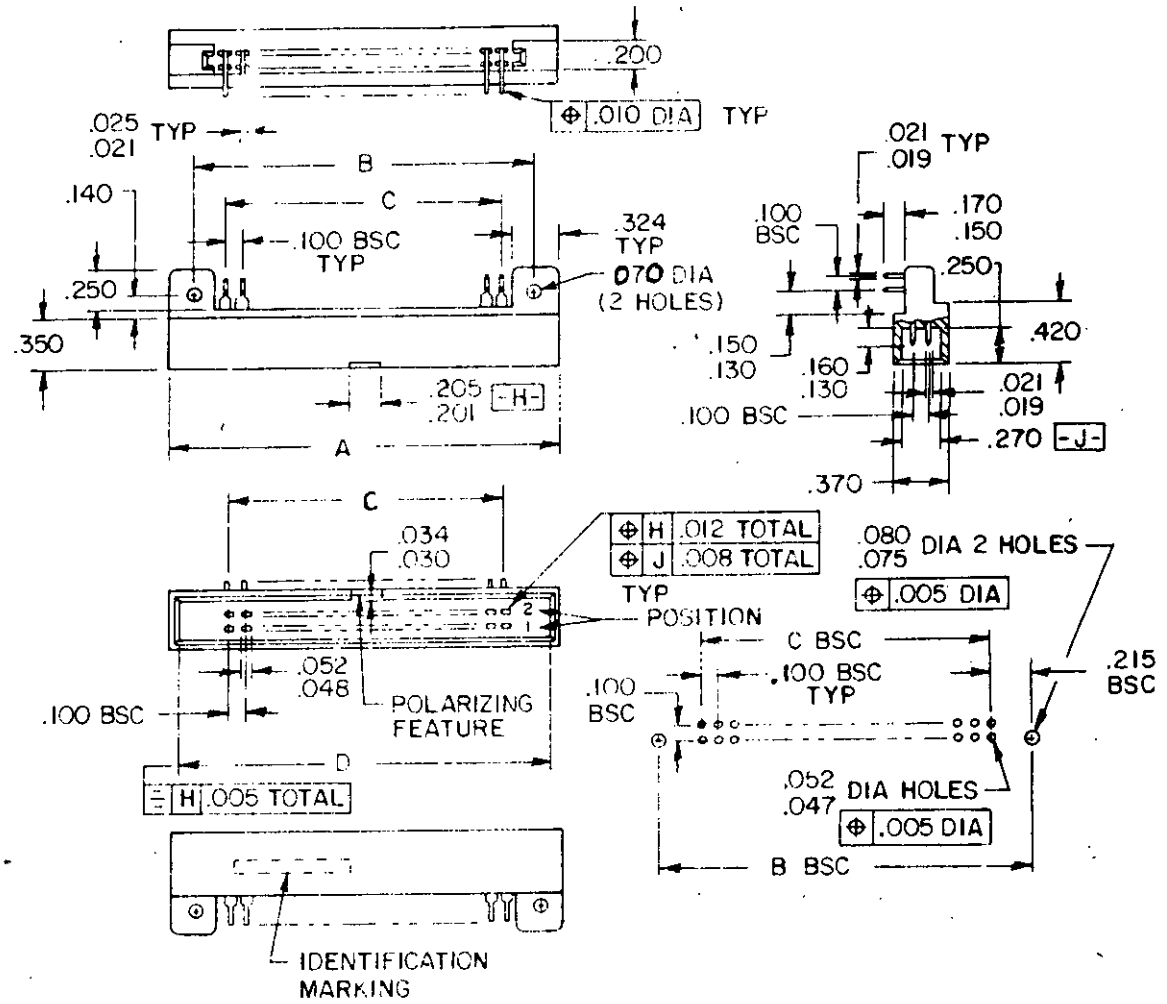


FIGURE 1. Connectors, plug (.100 spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Dash number	Number of contacts	A ±.015	B ±.010	C REF.	D ±.008
01	12	1.290	.930	.500	1.195
02	16	1.490	1.130	.700	1.395
03	20	1.690	1.330	.900	1.595
04	28	2.090	1.730	1.300	1.995
05	40	2.690	2.330	1.900	2.595
06	60	3.690	3.330	2.900	3.595
07	70	4.190	3.830	3.400	4.095
08	80	4.690	4.330	3.900	4.595
09	100	5.690	5.330	4.900	5.595
10	130	7.190	6.830	6.400	7.095

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.047	1.19	.201	5.10	1.130	28.70	2.330	59.18	4.595	116.71
.008	.20	.048	1.22	.205	5.21	1.195	30.35	2.595	65.91	4.690	119.13
.010	.25	.052	1.32	.215	5.46	1.290	32.77	2.690	68.33	4.900	124.46
.012	.30	.070	1.78	.250	6.35	1.300	33.02	2.900	73.66	5.330	135.38
.015	.38	.075	1.90	.270	6.86	1.330	33.78	3.330	84.58	5.595	142.11
.019	.48	.080	2.03	.324	8.23	1.395	35.43	3.400	86.36	5.690	144.53
.021	.53	.100	2.54	.350	8.89	1.490	37.85	3.595	91.31	6.400	162.56
.025	.64	.130	3.30	.370	9.40	1.595	40.51	3.690	93.73	6.830	173.48
.030	.76	.140	3.56	.420	10.67	1.690	42.93	3.830	97.28	7.095	180.21
.034	.86	.150	3.81	.500	12.70	1.730	43.94	3.900	99.06	7.190	182.63
		.160	4.06	.700	17.78	1.900	48.26	4.095	104.01		
		.170	4.32	.900	22.86	1.995	50.67	4.190	106.43		
		.200	5.08	.930	23.62	2.090	53.09	4.330	109.98		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/136.

FIGURE 1. Connectors, plug (.100 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Material:

Molded plastic insulator: Type GPT-30F per MIL-M-24519.

Pin contact: Brass, CDA260 per QQ-B-613.

Plating: The contact plating in the engaging area for a minimum length of .160 from the tip of the contact shall be gold per MIL-G-45204, type II, grade C, class 1 over nickel plating per QQ-N-290, class 2, 30 to 150 microinches. The contact plating on the remainder of the contact shall be gold per MIL-G-45204, type II, grade C, five (5) microinches minimum over nickel plating per QQ-N-290, class 2, 30 to 150 microinches.

Contact identification: See figure 1 (position identification relative to polarization feature).

Contact rating: 3 amperes maximum.

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance: The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum.

Dielectric withstanding voltage:

Sea level: 600 Vrms.
High altitude: 300 Vrms.

Part number: M55302/135-(dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS
Air Force - 11, 99, 85
DLA - ES

User activities:
Army - AT, AV
Navy - MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3096-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-55302/13[illegible]

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

FOLD

HQ. USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ. USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.