
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACTS, SOLDER EYELET AND WRAPOST REMOVABLE TYPES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector contacts described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

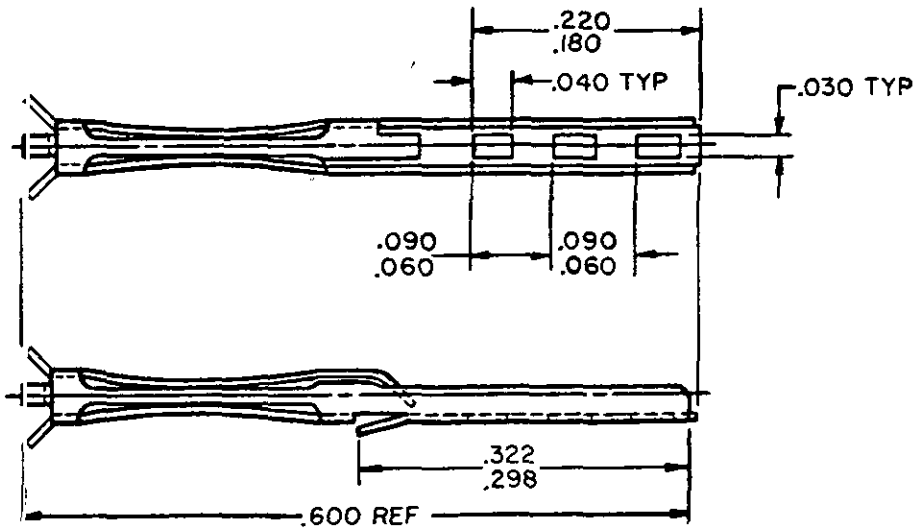

SOLDER EYELET-01

INCHES	MM
.030	.76
.040	1.02
.060	1.52
.090	2.29
.180	4.57
.220	5.59
.298	7.57
.322	8.18
.600	15.24


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).
4. Maximum wire size, no. 26 AWG.

FIGURE 1. Contacts, removable types.

(D) denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

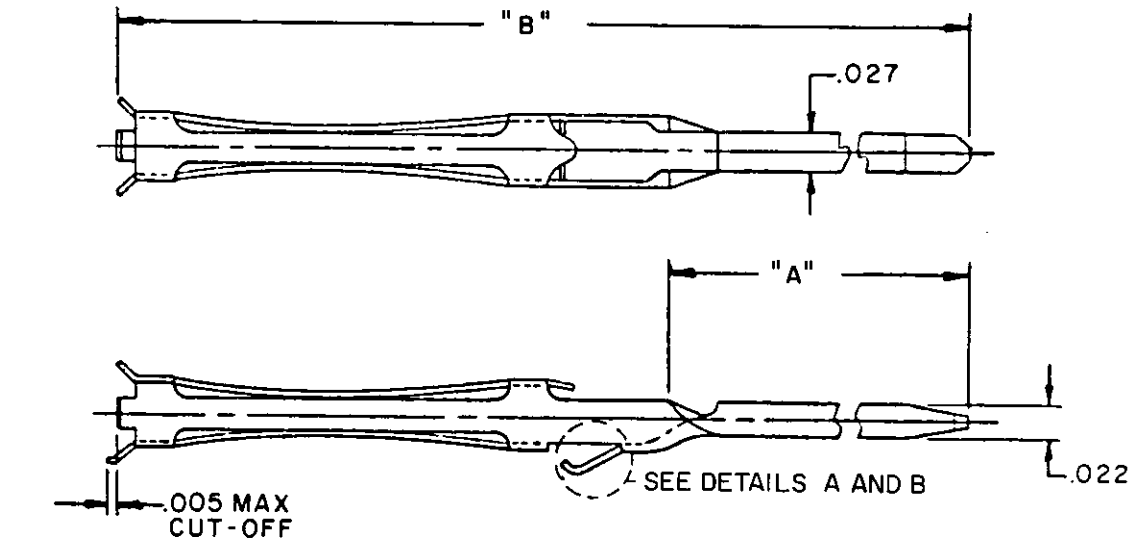

Wrapost, type V & VI



DETAIL-A (SEE TABLE I)



DETAIL-B (SEE TABLE II)

TABLE I. Detail A part numbers.

Wrapost contacts, type V		
Part number	A	B Max
M55302/32-02	.425	.795
M55302/32-03	.585	.955
M55302/32-04	.745	1.115

INCHES	MM
.005	.13
.022	.56
.027	.69
.425	10.80
.585	14.86
.745	18.92
.795	20.19
.955	24.26
1.115	28.32

TABLE II. Detail B part numbers.

Wrapost contacts, type VI		
Part number	A	B Max
M55302/32-05	.425	.795
M55302/32-06	.585	.955
M55302/32-07	.745	1.115

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1. Contacts, removable types (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and tables I and II.

Material: Beryllium copper per QQ-C-533.

(D) Plating (contact):

Part number M55302/32-01:
Engagement area: Gold per MIL-G-45204, type II, grade C, class 1, over nickel per QQ-N-290, class 2, 30 to 150 microinches.

Termination area: Tin lead per MIL-T-10727, class 1, over nickel per QQ-N-290, class 2, 30 to 150 microinches, for .300-inch minimum length.

Other contact areas: Nickel per QQ-N-290, class 2, 30 to 150 microinches.

Part numbers M55302/32-02 through -07: Gold per MIL-G-45204, type II, grade C, class 1, over nickel per QQ-N-290, class 2, 30 to 150 microinches.

Part number: M55302/32-(dash number from tables I and II).

QUALIFICATION AND QUALITY CONFORMANCE: Qualification and quality conformance requirements are not applicable. All contacts are tested in accordance with the applicable specification sheet.

SUPERSESSION DATA: See table III.

TABLE III. Supersession data.

Superseding part number M55302/32-	Superseded manufacturer's code 00779 part number
01	583218-2
02	2-583812-6
03	2-583812-8
04	3-583812-0
05	2-583812-2
06	2-583812-0
07	2-583812-4

APPLICATION: Contacts, solder eyelet, are to be used with connectors conforming to MIL-C-55302/24, MIL-C-55302/25, and MIL-C-55302/27, (type II). Contacts, wrapost, are to be used with connectors conforming to MIL-C-55302/27 (types V and VI).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - CR, AR, MI
Navy - SH, AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3192-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-C-55302/32D Connectors, Printed Circuit Subassembly & Accessories: Contacts, Solder Eyelet & Wrapost Removable Types

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

Headquarter,
US ARMY CECOM
ATTN: DRSEL-PED-CM-DM
Ft Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

US Army CECOM
Attn: DRSEL-PED-CM-DM
Ft. Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.