MILITARY SPECIFICATION

POWER SUPPLY, MINIATURE

±6.0 VOLTS DC, 2.0 AMPS

The complete requirements for procuring the power supply described herein shall consist of this document and the latest issue of Specification MIL-P-81279.

1. SCOPE

1.1 Scope - This specification covers the detail requirements for a ±6.0 volt d-c, 2.0 amp miniature power supply for use in military electronic equipment.

2. APPLICABLE DOCUMENTS

2.1 General - The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Military

MIL-P-81279 Power Supply, Miniature, General Specification for

3. REQUIREMENTS

3.1 Requirements - Requirements shall be in accordance with Specification MIL-P-81279 and as specified herein.

3.2 Outline Dimensions - The power supply outline dimensions shall be as specified in Figure 1.

3.3 Weight - The maximum weight of the power supply shall not exceed 0.6 pound.

3.4 Output Voltage and Current Rating. - The power supply shall provide a regulated output voltage of ±6.0 volts d-c over the current range of 0.1 to 2.0 amps.

FSC 6110

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.

3.5 Output Ripple Voltage - The total output ripple voltage and noise shall be 5 millivolts RMS or less.

3.6 Dynamic Impedance - The dynamic output impedance shall be less than 2% of full load impedance from d-c to 10 Kcps and less than 0.25 ohm from d-c to 500 Kcps, when measured at a dynamic current of ±10% of maximum current rating.

3.7 Efficiency - The output to input efficiency of the power supply when delivering full load current at nominal line voltage shall be a minimum of 40%.

3.8 Electromagnetic Compatibility - The power supply shall meet the RFI specifications designated in MIL-I-6181 when tested in accordance with MIL-P-81279 and Figure 4.

4. QUALITY ASSURANCE PROVISIONS

4.1 Tests - Tests shall be performed in accordance with MIL-P-81279 to determine that all requirements of MIL-P-81279 and this specification have been met.

5. PREPARATION FOR DELIVERY

5.1 General - Preparation for delivery shall be in accordance with specification MIL-P-81279.

6. NOTES

6.1 The schematic (Figure 2) and parts list (Figure 3) are for guidance purposes only. A data package (NOw 63-0749 di) will be supplied in microfilm form by Naval Air Technical Services Facility when requested by contractors in connection with specific procurement functions. Address requests to Naval Air Technical Services Facility, 700 Robbins Avenue, Philadelphia, Pennsylvania, 19111.

6.2 In application where MIL-I-6181 is a requirement, the RFI filter of Figure 4 must be used in conjunction with this power supply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.

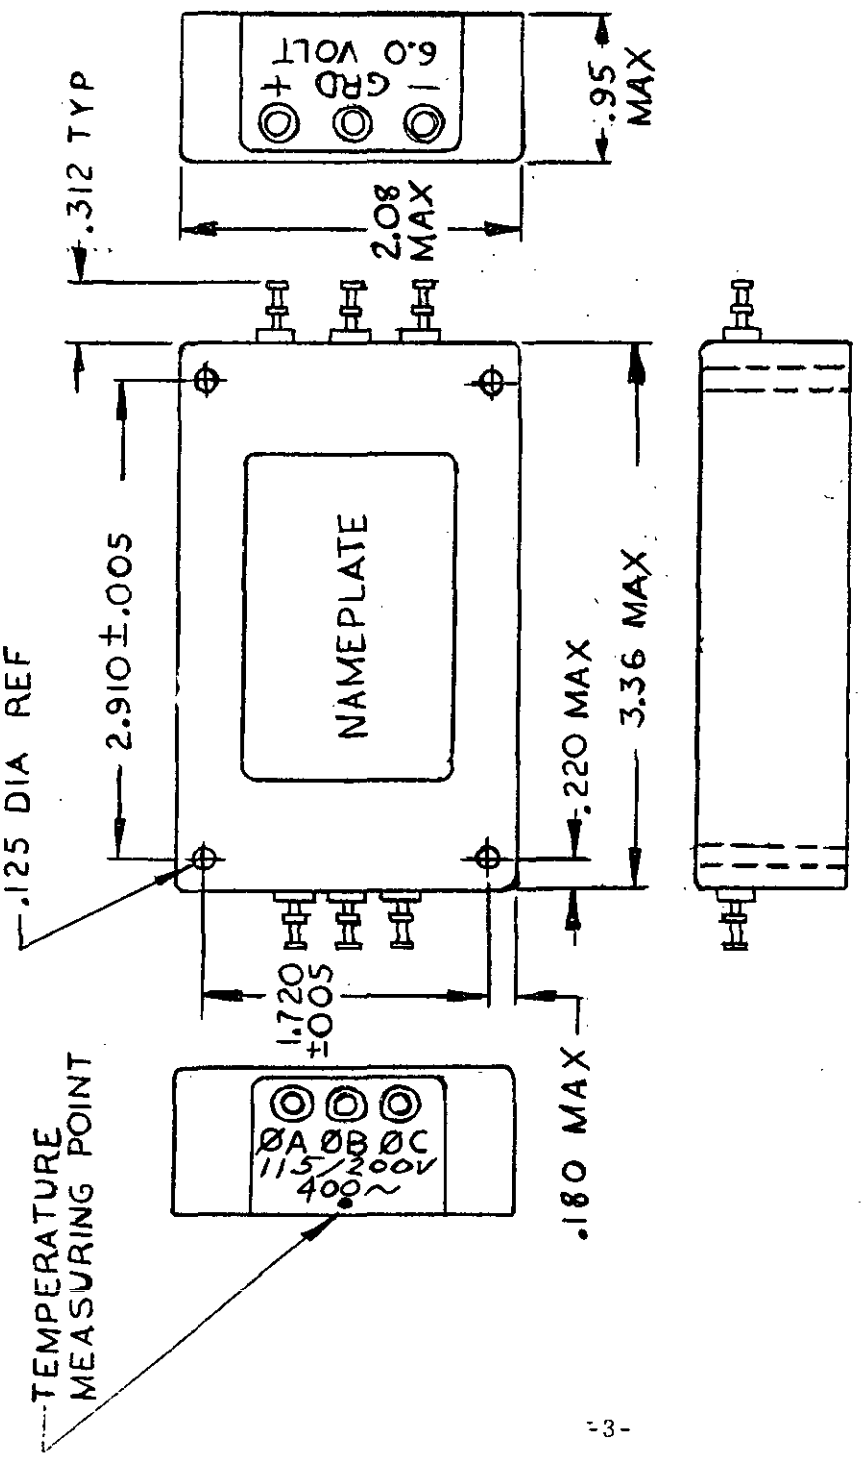


FIGURE 1 OUTLINE DRAWING OF ±6-VOLT, 2-AMP MINIATURE POWER SUPPLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.

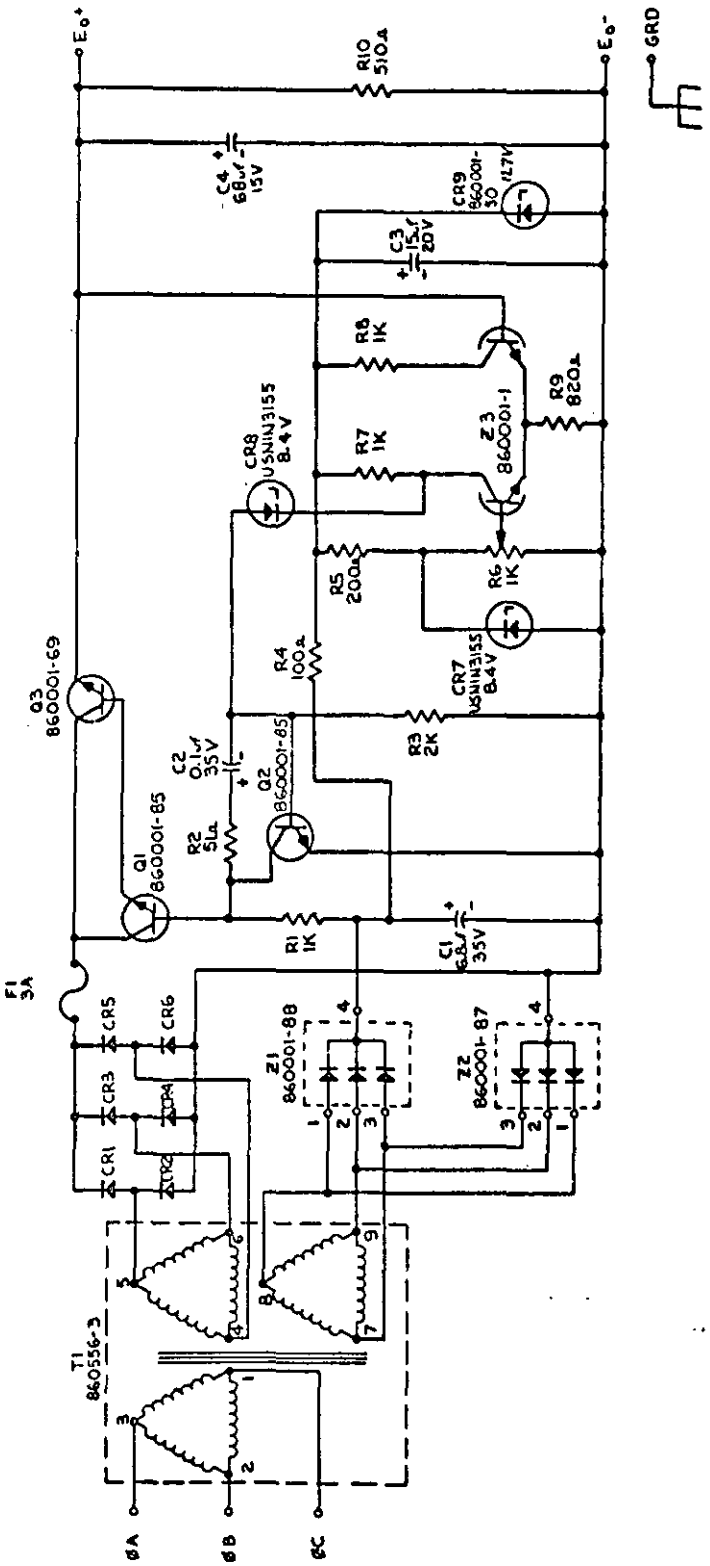


FIGURE 2 SCHEMATIC OF ±6-VOLT, 2-AMP MINIATURE POWER SUPPLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.

FIGURE 3

POWER SUPPLY, MINIATURE

±3.0 VOLTS DC, 2.0 AMPS

PARTS LIST

CIRCUIT SYMBOL	DESCRIPTION	REFERENCED SPECIFICATION
C1	CAPACITOR, FIXED SOLID ELECTROLYTE, TANTALUM	910123-1045
C2, C3	CAPACITOR, FIXED SOLID ELECTROLYTE, TANTALUM	MIL-C-26655
CR1, CR2, CR3 CR4, CR5, CR6	DIODE, SILICON	860001-67
CR7, CR8	SEMICONDUCTOR DEVICE	MIL-S-19500
CR9	DIODE, ZENER	860001-50
F1	FUSE, SUB-MINIATURE	860518-9
Q1, Q2	TRANSISTOR, SILICON	860001-85
Q3	TRANSISTOR, SILICON, POWER	860001-69
R1, R2, R3, R4, R5 R7, R8, R9, R10	RESISTOR, FIXED, METAL FILM	MIL-R-22684
R6	RESISTOR, VARIABLE WIREWOUND	860175-13
T1	TRANSFORMER, POWER	860556-1
Z1	DIODE, TRIPLET, SILICON	860001-88
Z2	DIODE, TRIPLET, SILICON	860001-87
Z3	TRANSISTOR, DUAL, SILICON	860001-1

910,000 and 860,000 numbers refer to Litton, Data Systems Division, component specification numbers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.

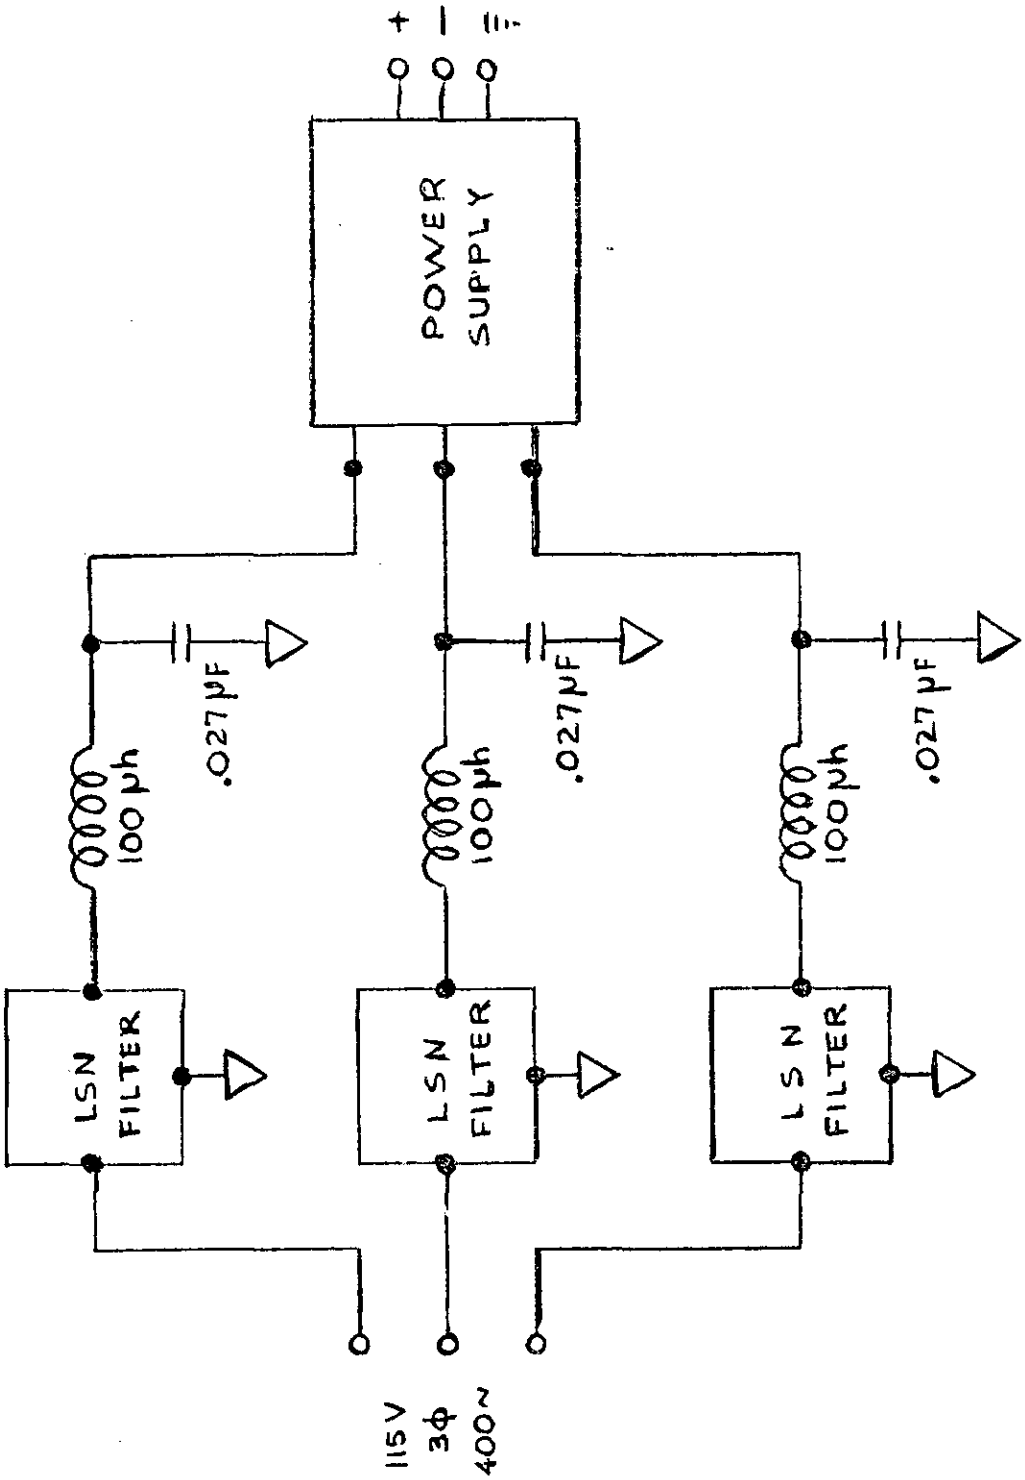


FIGURE 4 RFI TEST CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:09Z
Check the source to verify that this is the current version before use.