MIL-C-11693/5B
29 January 1976
SUPERSEDING
MIL-C-11693/5A
8 October 1971


MILITARY SPECIFICATION SHEET

CAPACITORS, FEED THROUGH, RADIO-INTERFERENCE REDUCTION, DC (HERMETICALLY SEALED IN METAL CASES), STYLE CZ20

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-11693.

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER 29 January 1976.

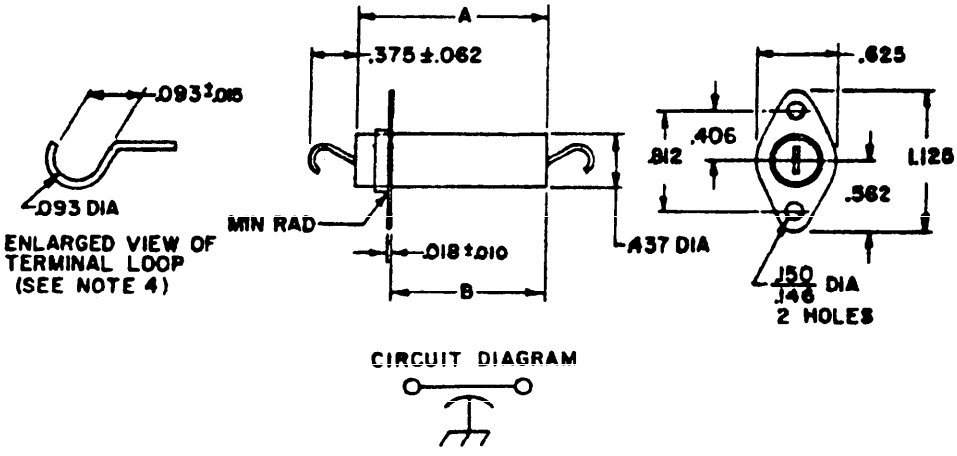

CIRCUIT DIAGRAM

TABLE I

Type designation	Rated voltage	Nominal capacitance	Rated current	Dimensions	
				A ±.031	B ±.031
	Volts, dc	μF	Amperes		
CZ20DWB254	100	0.25	20	1.250	1.062
CZ20DWB754	100	0.75	20	1.562	1.250

INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.146	3.71	.625	15.88
.015	.38	.150	3.81	.812	20.62
.018	.46	.375	9.53	1.062	26.97
.03	.76	.406	10.31	1.250	31.97
.062	1.57	.437	11.10	1.562	39.67
.093	2.36	.562	14.27	1.625	41.28

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.03.
4. Loop will accommodate AWG #14.

FIGURE 1. Style CZ20 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1 and table I.

Dielectric: Metallized paper.

Characteristic: See table I.

Temperature range: -55° to +85° C.

Rated voltage: See table I.

Rated current: See table I.

Capacitance: See table I.

Insertion loss (abbreviated):
MIL-STD-220.

Measurements shall be made at the following frequencies: 400 and 100 MHz.

DC resistance: The dc resistance shall not exceed 0.01 ohm.

Temperature and immersion cycling:
Method 102 of MIL-STD-202.

IR at 25° C - Not less than 75 percent of the initial requirement.
Capacitance - Change not more than 5 percent of the nominal value from the initial measurement.

Moisture resistance: Method 102 of MIL-STD-202.

IR at 25° C - Not less than 75 percent of the initial requirement.
Capacitance - Change not more than 5 percent of the nominal value from the initial measurement.

Life (accelerated), method 108, of MIL-STD-202.

IR at 25° C - Not less than 75 percent of initial requirement.
Capacitance - Change not more than 5 percent from the initial measured value.

NOTE: Intended use. For Air Force application, these capacitors should not be used in airborne equipment.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army -
Navy - EC
Air Force - 11, 85
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-1152-2)

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:51Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-C-11693/5B CAPACITORS, FEED THROUGH, RADIO-INTERFERENCE REDUCTION, DC (HERMETICALLY SEALTED IN METAL CASES) STYLE CZ20

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:51Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:51Z
Check the source to verify that this is the current version before use.