
MILITARY SPECIFICATION SHEET

CAPACITOR, FEED THROUGH, RADIO-INTERFERENCE REDUCTION, DC (HERMETICALLY SEALED IN METAL CASE), STYLE CZ25

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the capacitor described herein shall consist of this document and the latest issue of Specification MIL-C-11693.

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER 29 JANUARY 1976.

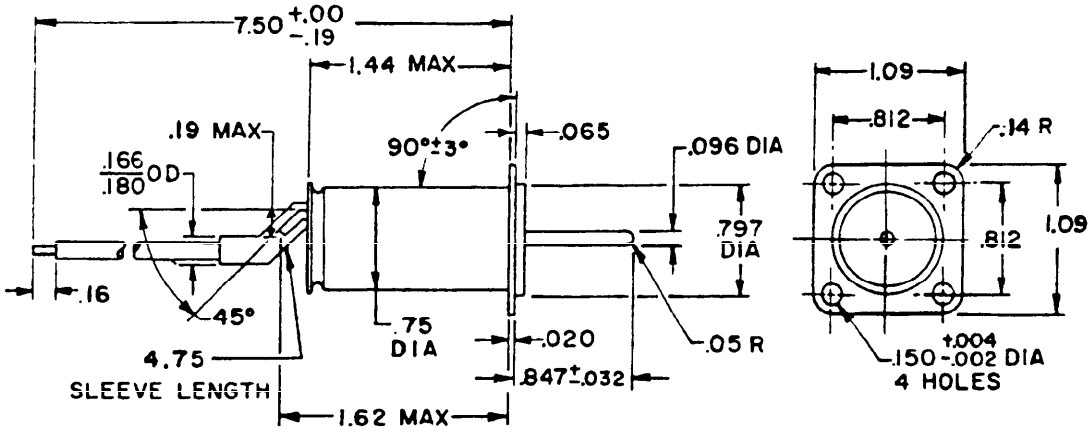

INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.096	2.44	.797	20.24
.004	.10	.14	3.6	.812	20.62
.010	.25	.150	3.81	.847	21.51
.020	.51	.16	4.1	1.09	27.7
.03	.8	.166	4.22	1.44	36.6
.032	.81	.180	4.57	1.62	41.1
.05	1.3	.19	4.8	4.75	120.6
.065	1.65	.75	19.0	7.50	190.5

CIRCUIT DIAGRAM



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.03 (.8 mm) on two place decimals and ±.010 (.25 mm) on three place decimals.

FIGURE 1. Style CZ25 capacitors.

© denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type designation: CZ25AWB205.

Design and construction:

Dimensions and configuration - See figure 1.

© Dielectric: Metallized paper or metallized plastic.

Characteristic: W.

Temperature range: -55° to +85°C.

Rated voltage: 100 volts dc.

Rated current: 5 amperes.

© Seal: Compression rubber.

Capacitance: 2.0 microfarads.

Insertion loss (abbreviated): MIL-STD-220.

Measurements shall be made at 400 and 50 megahertz.

DC resistance: The dc resistance shall not exceed 0.01 ohm.

Thermal shock: Method 107 of MIL-STD-202, condition A.

IR at 25°C - Not less than 75 percent of the value specified in the initial requirement.

Capacitance - Change not more than 5 percent of the nominal value from the initial measurement.

Moisture resistance: Method 106 of MIL-STD-202.

IR at 25°C - Not less than 75 percent of the value specified in the initial requirement.

Capacitance - Change not more than 5 percent of the nominal value from the initial measurement.

Life (accelerated): Method 108 of MIL-STD-202.

IR at 25°C - Not less than 75 percent of the value specified in the initial requirement.

Capacitance - Change not more than 5 percent from the initial measured value.

NOTE: Intended use. For Air Force application, this capacitor should not be used in airborne equipment.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - EC
Air Force - 11, 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1345)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-11693/8C CAPACITOR, FEED THROUGH, RADIO-INTERFERENCE reduction, DC (HERMETICALLY SEALED IN METAL CASE), STYLE CZ25

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T21:51Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-R-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:51Z
Check the source to verify that this is the current version before use.