MIL-C-11743E
28 June 1983
SUPERSEDING
MIL-C-11743D
1 February 1977

MILITARY SPECIFICATION

CASE, MAINTENANCE AND OPERATIONAL MANUALS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of cotton duck or polyurethane coated case.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns Army and Numbered.
CCC-D-950	- Dyeing and Aftertreating Processes for Cotton Cloths.
DDD-L-20	- Label; for Clothing, Equipage, and Tentage, (General Use).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-F-10884	- Fasteners, Snap.
MIL-G-16491	- Grommet, Metallic.
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS27977	- Fasteners, Snap.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

PUBLICATIONS

DEPARTMENT OF THE ARMY

FM 10-16	- General Repair of Tents, Canvas, and Webbing.

(Copies of specifications, standards, and publications required by manufacturers in connection with specific procurememt functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The case shall be as shown on figures 1, 2, and 3, and as specified herein. Dimensions up to 10 inches shall differ by not more than 1/8 inch from those specified, and dimensions over 10 inches shall differ by not more than 1/4 inch from those specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not as specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5).

3.3.1 Cloth. The material shall be either cotton duck cloth conforming to CCC-C-419, Type I, No. 10, hard texture, or nylon-coated cloth conforming to MIL-C-20696, Type II, Class 2 at the contractor's option.

3.3.1.1 Color and treatment. The cloth duck or coated nylon shall be dark green. When used, the duck cloth shall be water repellent, and shall be mildew-resistent-treated in accordance with CCC-D-950, Type I, Class B.

3.3.2 Polyester thread. The thread shall conform to V-T-285, Type I or II, Class 1, Size FF.

3.3.2.1 Color. The thread shall match Shade S-1 (Cable No. 66022) and shall show fastness to weathering equal to or better than the standard sample. If no standard sample is available, the thread shall show good fastness to weathering.

3.3.3 Webbing. Webbing for edging shall conform to MIL-W-530, Type IIa, Class 4, 3/4-inch width, olive drab No. 7.

3.3.4 Grommets. Grommets shall conform to MIL-G-16491, Type II, Class 3, size No. 0.

3.3.5 Fasteners. Snap fasteners shall conform to MIL-F-10884, Style 1, Finish 2. The female component shall be the regular length pronged socket and clinch plate conforming to MS27977-1B. The male component shall be the stud, eyelet base, with washer, conforming to MS27977-8B.

3.4 Stitches. Stitches shall conform to FED-STD-751. Seam stitches shall be type 301, 5 to 7 stitches per inch. Edge-finishing stitches shall be type 502.

3.5 Seams. Seams shall conform to FED-STD-751. All seams shall be superimposed, type SSa-1, except that seams attaching webbing for binding the edges shall be bound seams, type BSa-1. Thread breaks in seams shall be backstitched not less than 1 inch at each break. Seams shall be backstitched not less than 1 inch at the ends except where ends are turned under in a hem or held down by other stitches. Adjustment of the thread tension shall be maintained to prevent loose stitches and to assure imbedding of the stitches with thread lock in the center of the material thickness. All thread ends shall be trimmed to a length of not more than 1/4 inch (0.6 centimeter [cm]).

3.6 Stitching. Stitching shall conform to FED-STD-751. All exposed cut edges of the cloth shall be protected from raveling. Stitching to prevent raveling of cut edges shall be type EFa-1, except that exposed cut edges left in providing drainage openings and edges of the side covers shall be type EFd-1. Where edge finishing is required for the drainage openings and side covers,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

awning braid 3/4 inch (1.9 cm) wide may be used with type BSa-1 seam. Thread breaks in stitching shall be overstitched not less than 1 inch at each break. Stitching shall be backstitched not less than 1 inch at the ends except where ends are turned under in a hem or held down by other stitches. Adjustment of the thread tension shall be maintained to prevent loose stitches and to assure imbedding of the stitches with thread lock in the center of the material thickness. Thread ends shall be trimmed as specified in 3.5.

3.7 Setting of grommets. Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the grommet must be forced through the hole. The grommets shall be securely clinched without cutting the material.

3.8 Setting of snap fasteners. Holes punched before inserting the male or female part of the fastener shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. Components shall be securely clinched without splitting.

3.9 Repairs. Repairs shall be effected in accordance with FM 10-16.

3.10 Identification marking. The case shall be identified in accordance with MIL-STD-130. The identification marking shall be 1/4-inch characters applied to the underside of the top flap. The letters "U.S." shall be 3-inch characters centered on the front of the case. Identification markings shall conform to DDD-L-20, Type IV, Class 9.

3.11 Government-furnished property. When specified (see 6.2 and 6.4), the following materials in quantities indicated will be furnished by the Government:

Item No.	Desription	Identification	Quantity
1	Cloth, cotton duck, dark green.	CCC-C-419, Type I, No. 10, hard texture.	As required.
2	Webbing, 3/4 inch, dark green.	MIL-W-530, Type IIa, Class 4.	As required.
3	Cloth, Coated, nylon, waterproof, dark green.	MIL-C-20696	As required.

3.12 Workmanship. All parts, components, and assemblies of the case, including seams, stitches, and stitching, shall be free from fabrication defects which would affect its appearance or impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The case shall be examined as specified in 4.5. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, inspection level II, except examination for defect 112 shall be inspection level S-2.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5. AQL shall be 2.5 percent defective for major defects and 6.5 percent defective for minor defects. For defect 112, AQL shall be 6.5 percent defective.

4.5 Examination. The cases shall be examined as specified herein for the following defects:

Major

101. Material or component not as specified.
102. Any component or assembly missing, split, or malformed.
103. Cut, tear, or hole in fabric.
104. Stitches, seams, or stitching not as specified.
105. Exposed cut edge of cloth not protected from raveling as specified.
106. Snap fastener or grommet improperly located, clinched excessively tight so as to cut into fabric, insecurely clinched, split or inoperable.
107. Webbing misalined, not uniformly placed around entire perimeter of case.
108. Seams or stitching open more than 1 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

Note: A seam or stitch shall be classified as "open" when one or more stitches are broken.

109. Stitching which falls outside parts to be sewn together.
110. Any part of case assembly caught in unrelated stitching.
111. Edge finishing, where required for drainage openings and side covers, not as specified.
112. Dimensions (figures 2 and 3) differing from those specified by more than 1/8 inch for dimensions up to 10 inches and 1/4 inch for dimensions over 10 inches.
113. Size, type, or finish of grommets, snap fasteners, or washers not as specified.
114. Stitch tension loose, resulting in a loosely exposed bobbin or top thread; too tight, resulting in puckering of fabric.
115. Seam or thread break not overstitched as specified.
116. Hole in fabric for grommet or snap fastener not as specified.
117. Repairs not in accordance with FM 10-16.

Minor

201. Selvaged ends of webbing frayed or scalloped.
202. Seam or stitching open more than 1/2 inch but not more than 1 inch.
203. One or more stitches per inch less than minimum specified.
204. Two or more stitches per inch more than specified.
205. Stitching not uniform; stitching margin irregular.
206. Thread ends not trimmed as specified.
207. Grease or oil stain clearly noticeable.
208. Identification marking missing, incomplete, incorrect, illegible, of improper size, or misplaced.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

118. Method of preservation not as specified for level A (see 5.1.1).
119. Boxes not as specified for level A or B (see 5.1.1.1, 5.2.1, and 5.2.2).
120. Quantities consolidated together not as specified for level A (see 5.1.1.1).
121. Preservation and packing not in accordance with the referenced document (see 5.1.2 and 5.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

122. Quantities packed together exceed the size or weight limitation of the box for level A or B (see 5.2.1 and 5.2.2).
123. Marking missing, illegible, incorrect, or incomplete for level A or B or commercial (see 5.3).

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each case shall be preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.1.1.1 Consolidation. Cases preserved as specified in 5.1.1 shall be consolidated together in a close fitting box conforming to PPP-B-636, W5c, style optional in quantities as specified (see 6.2).

5.1.2 Commercial. Each case shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.2.1 Level A. Cases, preserved as specified in 5.1, shall be packed in close fitting boxes conforming to PPP-B-601, Overseas Type, style optional, in quantities not to exceed the weight limitation of the box. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.2.2 Level B. Cases, preserved as specified in 5.1, shall be packed in close fitting boxes conforming to PPP-B-636, V3c, V11c, V13c, or V15c, style optional, in quantities not to exceed the size or weight limitation of the box. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.2.3 Commercial. Cases, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188

5.3 Marking.

5.3.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The case is intended for storage of technical literature, charts, books, or pamphlets pertaining to maintenance and operation of equipment.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.
b. Date of issue of DoDiss applicable and exceptions thereto (see 2.1.1).
c. When a first article is required for inspection and approval, and number of cases required (see 3.2).
d. When the material will be furnished by the Government (see 3.11 and 6.4).
e. Degree of preservation and degree of packing required (see 5.1 and 5.2).
f. Quantity per consolidation container (see 5.1.1.1).

6.3 First article. When a first article inspection is required, the item should be a first produced case. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations and approval of the first article.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.11, when applicable (see 6.2).

6.5 Recycled material. It is encouraged that recycled material be used when practical, as long as it meets the requirements of this specification (see 3.3).

Custodians:
Army - ME
Air Force - 99


Review activity:
Army - GL

User activity:
Navy - MC

Preparing activity:
Army - ME

Project 7520-0177

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

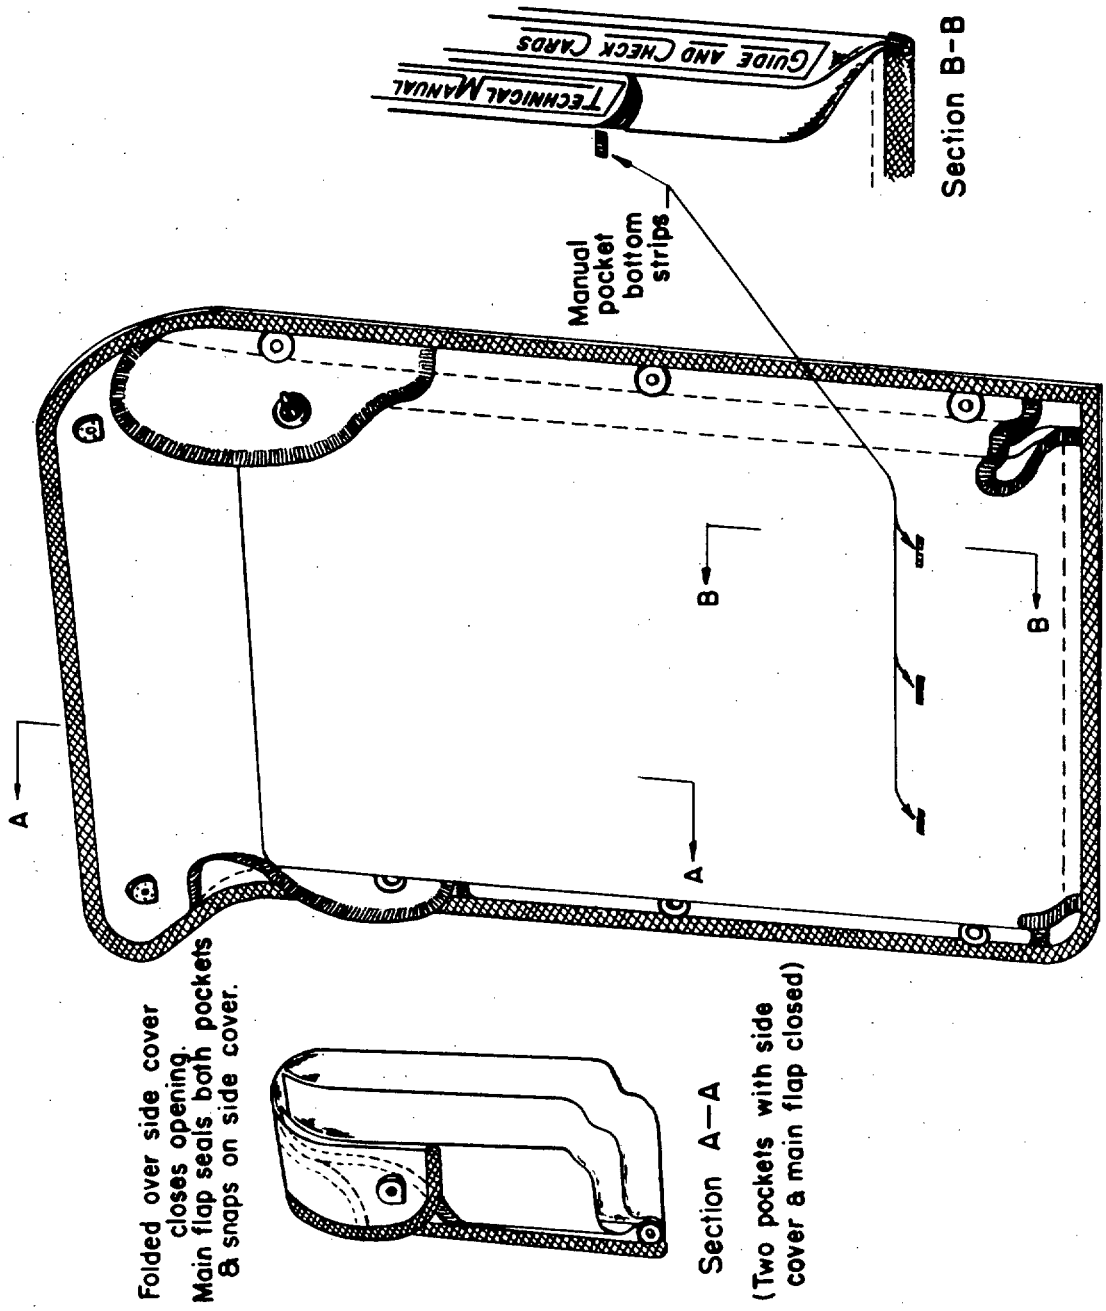


X-3221

FIGURE 1. Pocket, canvas, for lubrication guides.

ARMY-FORT BELVOIR, VA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

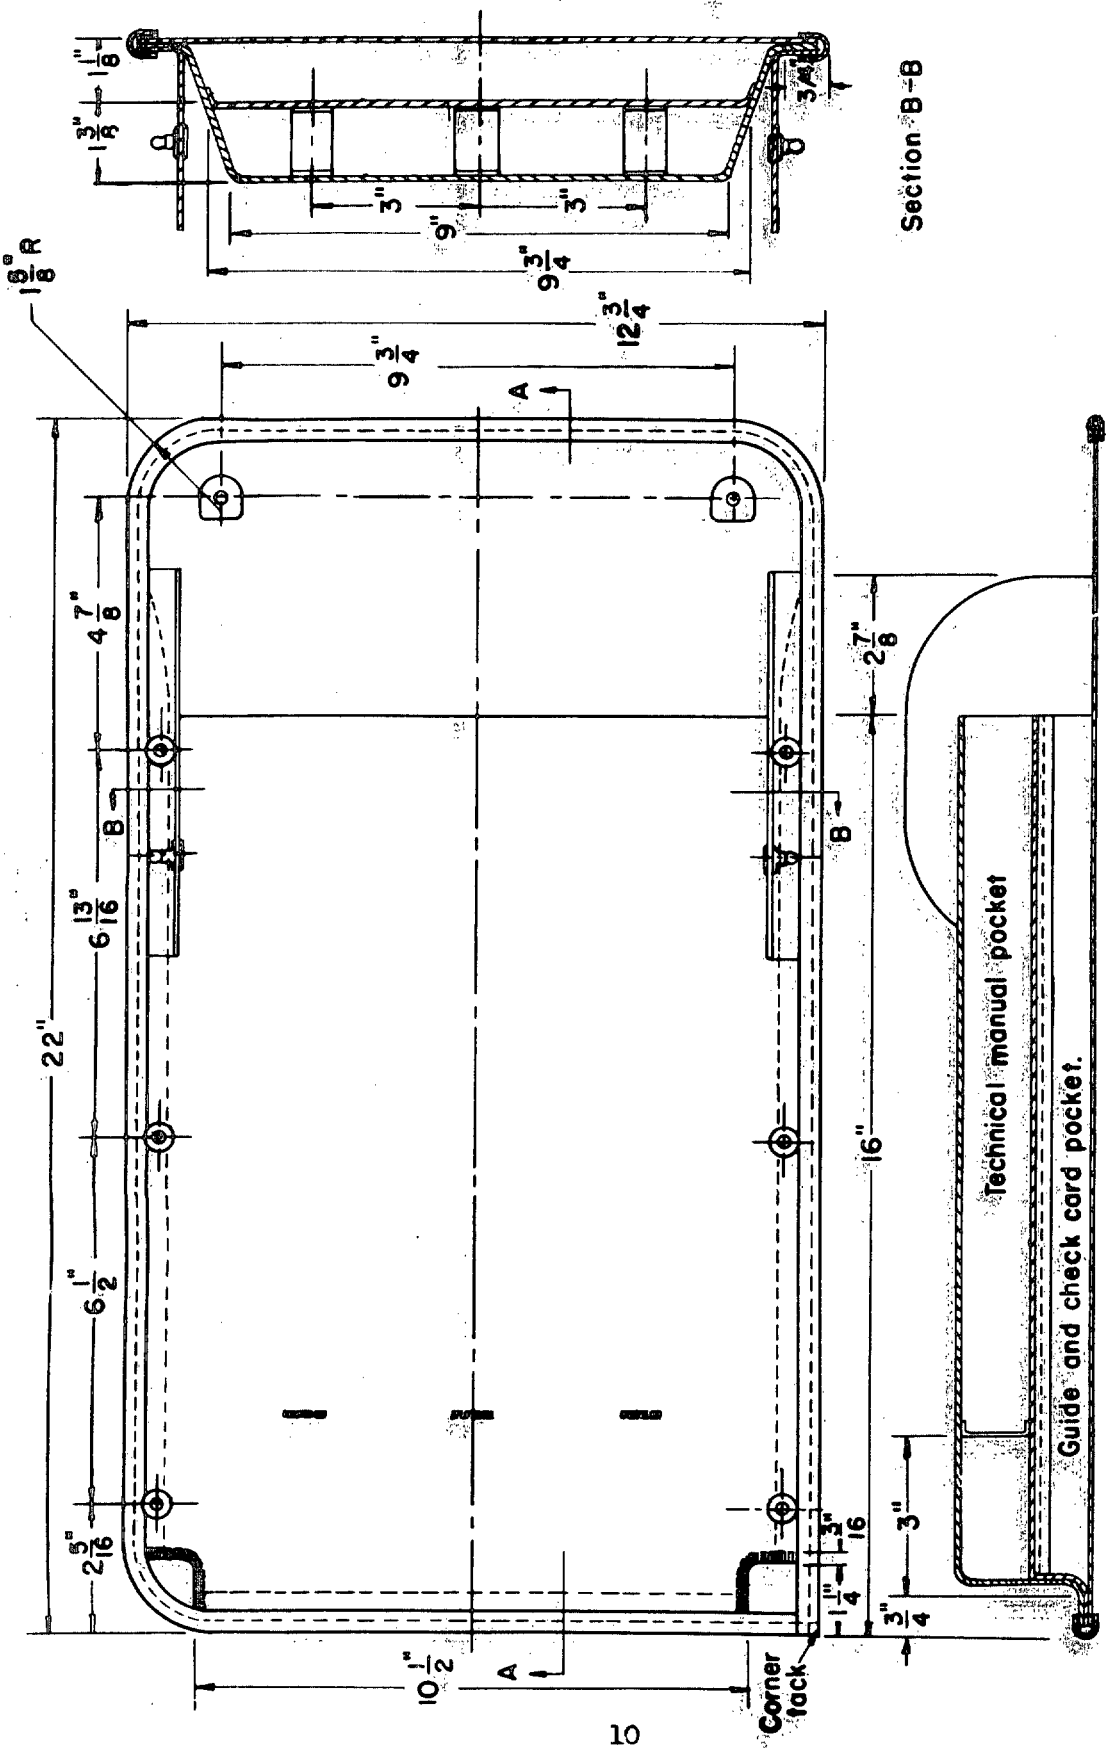


X-3222


FIGURE 2. Pocket assembly.

ARMY-FORT BELVOIR, VA.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

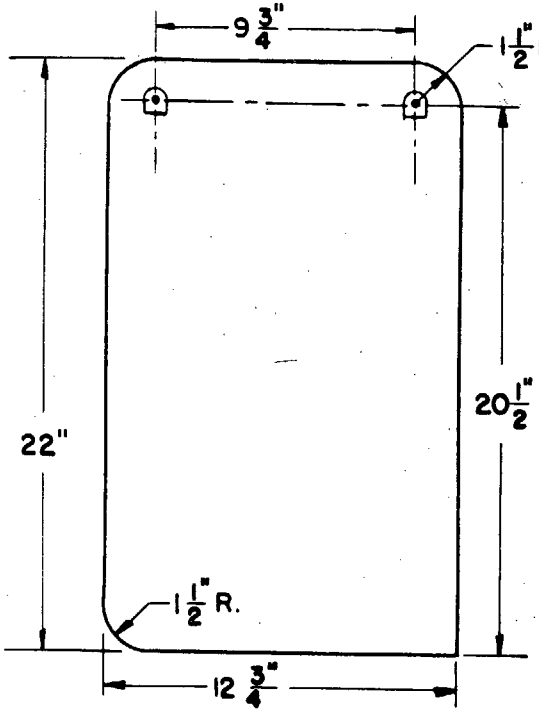


Pocket base.

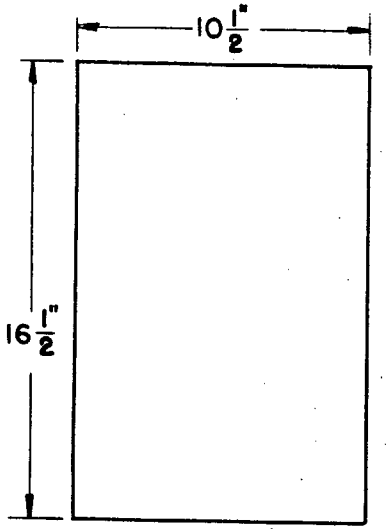


Guide & check card pocket.

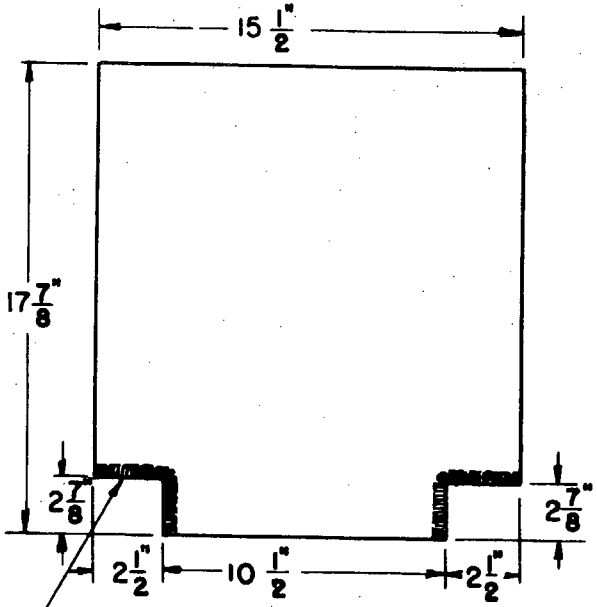

Technical manual pocket.



Manual pocket bottom strip.

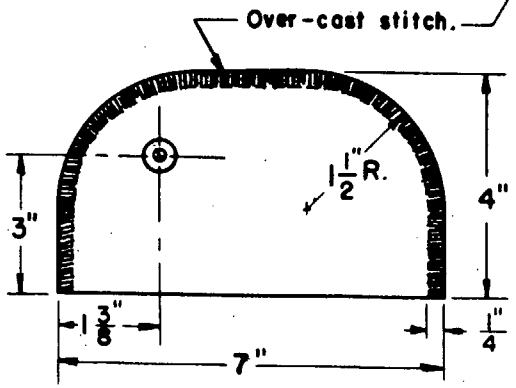

Side cover

FIGURE 3. Details, component parts.

MIL-C-11743E

11

ARMY—MOINT BELVOIR VA.

X-3223

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-11743E	Case, Maintenance and Operational Manuals

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.