INCH-POUND

MIL-C-11743F
23 January 1989
SUPERSEDING
MIL-C-11743E
28 June 1983

MILITARY SPECIFICATION

CASE, MAINTENANCE AND OPERATIONAL MANUALS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of cotton duck or polyurethane-coated case.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns Army, and Numbered.
CCC-D-950	- Dyeing and Aftertreating Processes for Cotton Cloths.
DDD-L-20	- Label: for Clothing, Equipage, and Tentage, (General Use).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7520
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-F-10884	- Fasteners, Snap.
MIL-G-16491	- Grommet, Metallic.
MIL-C-20696	- Cloth, Coated, Polyester or Nylon, Waterproof.
MIL-T-43566	- Tape, Textile, Cotton or Polyester, General Purpose, Natural or in Colors.

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MS27977	- Fasteners, Snap, Style 1, (Large Curtain Type).

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATIN; NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government publications. The following other Government publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

PUBLICATIONS

DEPARTMENT OF THE ARMY

FM 10-16	- General Fabric Repair.

(Copies of publications required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center, ATIN: STRBE-JDT, Fort Belvoir, VA 22060-5606.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

3.1 Description. The case shall be as shown on figures 1, 2, and 3, and as specified herein. Dimensions up to 254 mm shall differ by not more than 3.18 mm from those specified, and dimensions over 254 mm shall differ by not more than 6.35 mm from those specified.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.2).

3.3.1 Material deterioration prevention and control. The cases shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which cases may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the cases may be newly fabricated from recovered materials to the maximum extent practicable, provided the cases produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the cases.

3.3.3 Cloth. The material shall be either cotton duck cloth conforming to CCC-C-419, type I, no. 10, hard texture, or nylon-coated cloth conforming to MIL-C-20696, type II, class 2 at the contractor's option.

3.3.3.1 Color and treatment. The cloth duck or coated nylon shall be dark green. When used, the duck cloth shall be water repellent, and mildew-resistant-treated conforming to CCC-D-950, type I, class B.

3.3.4 Polyester thread. The thread shall conform to V-T-285, type I or II, class 1, size FF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

3.3.4.1 Color. The thread shall match shade olive drab S-1 (cable no. 66022) and shall show fastness to weathering equal to or better than the standard sample. If no standard sample is available, the thread shall show good fastness to weathering.

3.3.5 Webbing. Webbing for edging shall conform to MIL-T-43566, type I, class 4, 19.05 mm width, olive drab no. 7.

3.3.6 Grommets. Grommets shall conform to MIL-G-16491, type II, class 3, size no. 0.

3.3.7 Fasteners. Snap fasteners shall conform to MIL-F-10884, style 1, finish 2. The female component shall be the regular-length pronged socket and clinch plate conforming to MS27977-1B. The male component shall be the stud, eyelet base, with washer, conforming to MS27977-8B.

3.3.8 Bottom strip. The manual pocket bottom strip shall conform to MIL-T-43566, type I, class 3, olive drab no. 7.

3.4 Stitches. Stitches shall conform to FED-STD-751. Seam stitches shall be type 301, 5 to 7 stitches per 25.4 mm. Edge finishing stitches shall be type 502.

3.5 Seams. Seams shall conform to FED-STD-751. All seams shall be superimposed, type SSa-1, except that seams attaching webbing for binding the edges shall be bound seams, type BSa-1. Thread breaks in seams shall be backstitched not less than 25.4 mm at each break. Seams shall be backstitched not less than 25.4 mm at the ends except where ends are turned under in a hem or held down by other stitches. Adjustment of the thread tension shall be maintained to prevent loose stitches and to assure imbedding of the stitches with thread lock in the center of the material thickness. All thread ends shall be trimmed to a length of not more than 6.35 mm.

3.6 Stitching. Stitching shall conform to FED-STD-751. All exposed cut edges of the cloth shall be protected from raveling. Stitching to prevent raveling of cut edges shall be type EFa-1, except that exposed cut edges left in providing drainage openings and edges of the side covers shall be type EFd-1. Where edge finishing is required for the drainage openings and side covers, awning braid 19.05 mm wide may be used with type BSa-1 seam. Thread breaks in stitching shall be over- stitched not less than 25.4 mm at each break. Stitching shall be backstitched not less than 25.4 mm at the ends, except where ends are turned under in a hem or held down by other stitches. Adjustment of the thread tension shall be maintained to prevent loose stitches and to assure imbedding of the stitches with thread lock in the center of the material thickness. Thread ends shall be trimmed as specified in 3.5.

3.7 Setting of grommets. Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the grommet must be forced through the hole. The grommets shall be securely clinched without cutting the material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

3.8 Setting of snap fasteners. Holes punched before inserting the male or female part of the fastener shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. Components shall be securely clinched without splitting.

3.9 Repairs. Repairs shall conform to FM 10-16.

3.10 Identification marking. The case shall conform to MIL-STD-130. The identification marking shall be 6.35 mm characters applied to the underside of the top flap. The letters "U.S." shall be 76.2 mm characters centered on the front of the case. Identification markings shall conform to DDD-L-20, type IV, class 9.

3.11 Government-furnished property. When specified (see 6.2 and 6.4), the following materials in the quantities indicated will be furnished by the Government:

Item No.	Description	Identification	Quantity
1	Cloth, cotton duck, dark green.	CCC-C-419, type I, no. 10, hard texture.	As required.
2	Webbing, 19.05 mm, dark green.	MIL-T-43566, type I, class 4.	As required
3	Cloth, coated, nylon, waterproof, dark green.	MIL-C-20696.	As required.
4	Bottom strip.	MIL-T-43566, type I, class 3.	As required.

3.12 Workmanship. All parts, components, and assemblies of the case, including seams, stitches, and stitching, shall be free from fabrication defects that would affect its appearance or impair its operation or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article shall be examined as specified in 4.5. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall conform to MIL-STD-105.

4.4.2 Examination. Samples selected shall conform to 4.4.1 and shall be examined as specified in 4.5. Acceptable quality level (AQL) shall be 1.0 percent defective for major defects and 2.5 percent defective for minor defects.

4.5 Inspection procedure.

4.5.1 Examination. The cases shall be examined as specified herein for the following defects:

Major	Defects	Requirement paragraph
101.	Dimensions (figures 2 and 3) differing from those specified by more than 3.18 mm for dimensions up to 254 mm and 6.35 mm for dimensions over 254 mm.	3.1
102.	Material not as specified.	3.3
103.	Material not resistant to corrosion and deterioration, or treated to be made resistant to corrosion and deterioration.	3.3.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

104.	Dissimilar metals not conforming to MIL-STD-889.	3.3.1.1
105.	Material, material finish or treatment not identified or information of these not available.	3.3.1.2
106.	Used, rebuilt, or remanufactured components, pieces or parts has been incorporated in the cases.	3.3.2
107.	Cut, tear, or hole in cloth.	3.3.3
108.	Color and treatment of cloth not as specified.	3.3.3.1
109.	Thread not as specified.	3.3.4
110.	Color of thread not as specified.	3.3.4.1
111.	Webbing not as specified, misaligned, or not uniformly placed around entire perimeter of case.	3.3.5
112.	Size, type, or finish of grommets, snap fasteners, or washers not as specified.	3.3.6, 3.3.7
113.	Bottom strip not as specified.	3.3.8
114.	Stitches, seams, or stitching not as specified.	3.4, 3.5, 3.6
115.	Seams or stitching open more than 25.4 mm. Note: A seam or stitch shall be classified as "open" when one or more stitches are broken.	3.5, 3.6
116.	Seam or thread break not overstitched as specified.	3.5
117.	Stitch tension loose, resulting in a loosely exposed bobbin or top thread; too tight, resulting in puckering of fabric.	3.5, 3.6
118.	Exposed cut edge of cloth not protected from raveling as specified.	3.6
119.	Stitching which falls outside parts to be sewn together.	3.6
120.	Any part of case assembly caught in unrelated stitching.	3.6
121.	Edge finishing, where required for drainage openings and side covers, not as specified.	3.6
122.	Snap fasteners or grommets improperly located, clinched excessively tight to cut into fabric, insecurely clinched, split or inoperable.	3.7, 3.8
123.	Hole in fabric for grommet or snap fastener not as specified.	3.7, 3.8
124.	Repairs do not conform to FM 10-16.	3.9
125.	Government-furnished property not furnished.	3.11
126.	Workmanship not as specified.	3.12

Minor

201.	One or more stitches per 25.4 mm less than minimum specified.	3.4
202.	Two or more stitches per 25.4 mm more than specified.	3.4
203.	Selvaged ends of webbing frayed or scalloped.	3.5, 3.6
204.	Seam or stitching open more than 12.7 mm but not more than 25.4 mm.	3.5, 3.6
205.	Thread ends not trimmed as specified.	3.5
206.	Stitching not uniform or stitching margin irregular.	3.6
207.	Identification marking missing, incomplete, incorrect, illegible, of improper size, or misplaced.	3.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall conform to MIL-STD-105.

4.6.1.3 Examination. Samples selected shall conform to 4.6.1.2 and shall be examined for the following defects. AQL shall be 1.0 percent defective.

127.	Method of preservation not as specified for level A (see 5.1.1).
128.	Boxes not as specified for level A or B (see 5.2.1 and 5.2.2).
129.	Quantities packed together exceed the size or weight limitation of the box for level A or B (see 5.2.1 and 5.2.2).
130.	Marking missing, illegible, incorrect, or incomplete for level A, B, or C (see 5.3).

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each case shall be closed by the means provided and preserved conforming to MIl-P-116, method IC-1 or IC-3.

5.1.2 Level C. Each case shall be closed by the means provided and shall not require preservation.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Cases, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional, in quantities not to exceed the weight limitation of the box. Box closure and strapping shall conform to the appendix of the box specification.

5.2.2 Level B. Cases, preserved as specified in 5.1.1, shall be packed in close-fitting boxes conforming to PPP-B-636, V3c, V11c, V13c, or V15c, style optional, in quantities not to exceed the size or weight limitation of the box. Box closure and strapping shall conform to the appendix of the box specification.

5.2.3 Level C. Cases preserved as specified in 5.1, shall be packed in boxes conforming to PPP-B-636, domestic type. The quantities packed shall not exceed the size or weight limitations of the box. Box closure and strapping shall conform to the appendix of the box specification.

5.3 Marking. Marking shall conform to MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The case is intended for storage of technical literature, charts, books, or pamphlets pertaining to maintenance and operation of equipment.


6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.
b. Part number (see 6.5).
c. Date of issue of DODISS applicable and exceptions thereto (see 2.1.1).
d. When a first article is not required for inspection and approval (see 3.2).
e. The number of cases required for first article inspection (see 3.2).
f. When the material will be furnished by the Government (see 3.11 and 6.4).
g. Level of preservation and packing required (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.11, when applicable (see 6.2).

6.5 Part or identifying number (PIN). The PIN to be used for cases acquired to this specification are created as follows:

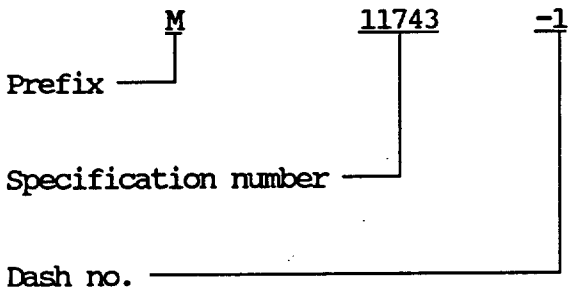

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

Bag, manuals and cards
Case, manuals and cards
Holder, manuals and cards
Pocket, manuals and cards
Pouch, manuals and cards

6.7 Metric equivalents. Metric equivalents indicated throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380, Standard for Metric Practice.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Air Force - 99

Review activity:
Army - GL
Air Force - 84

User activity:
Navy - MC

Preparing activity:
Army - ME

Project 7520-0184

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.


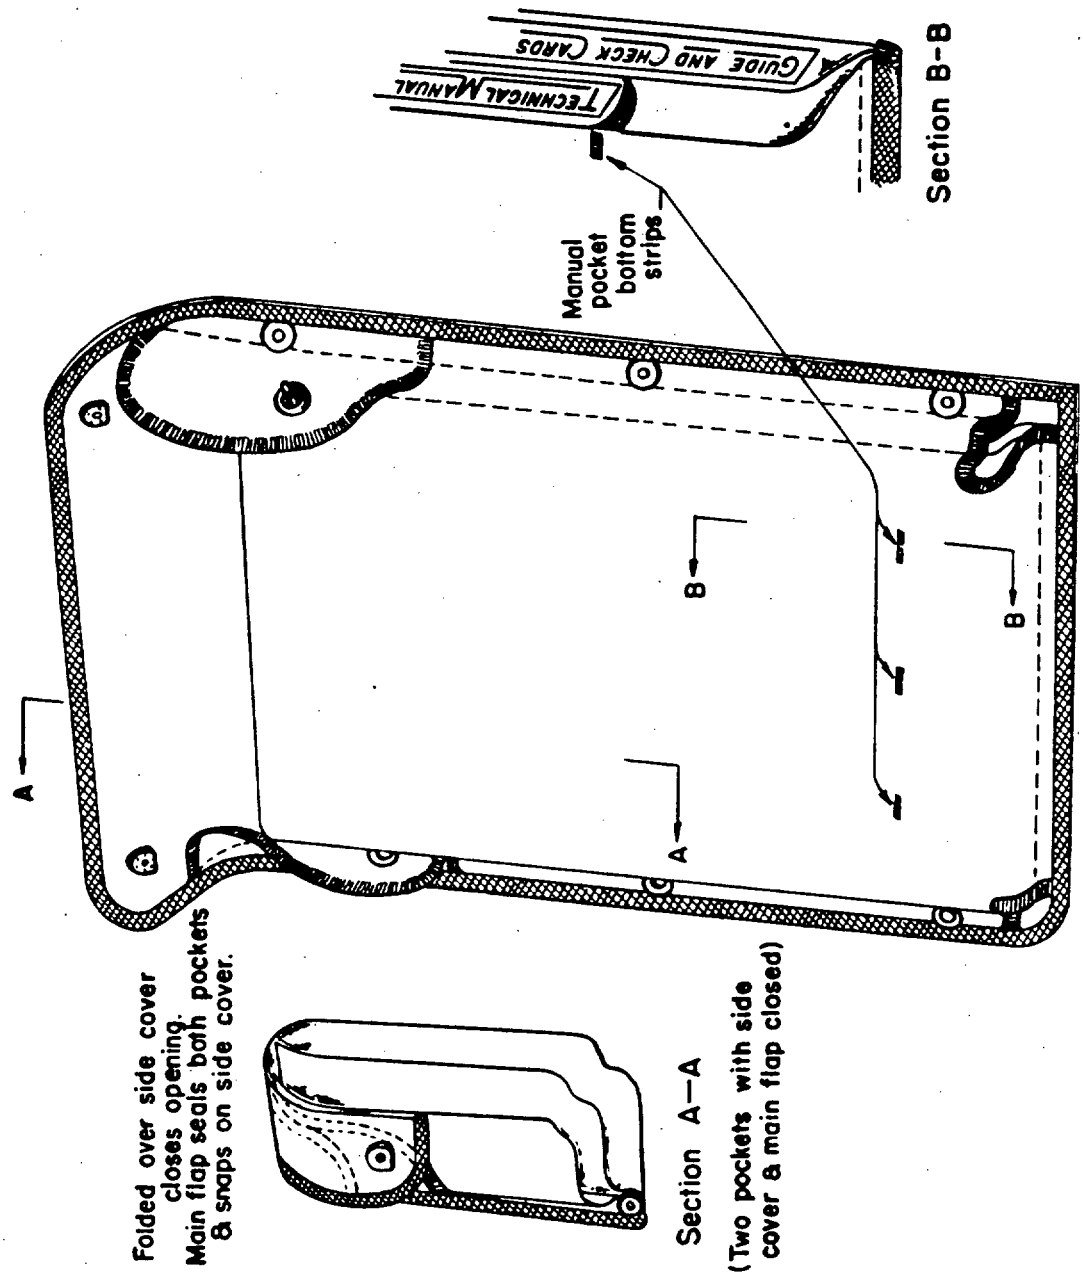


FIGURE 1. Pocket, canvas, for lubrication guides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

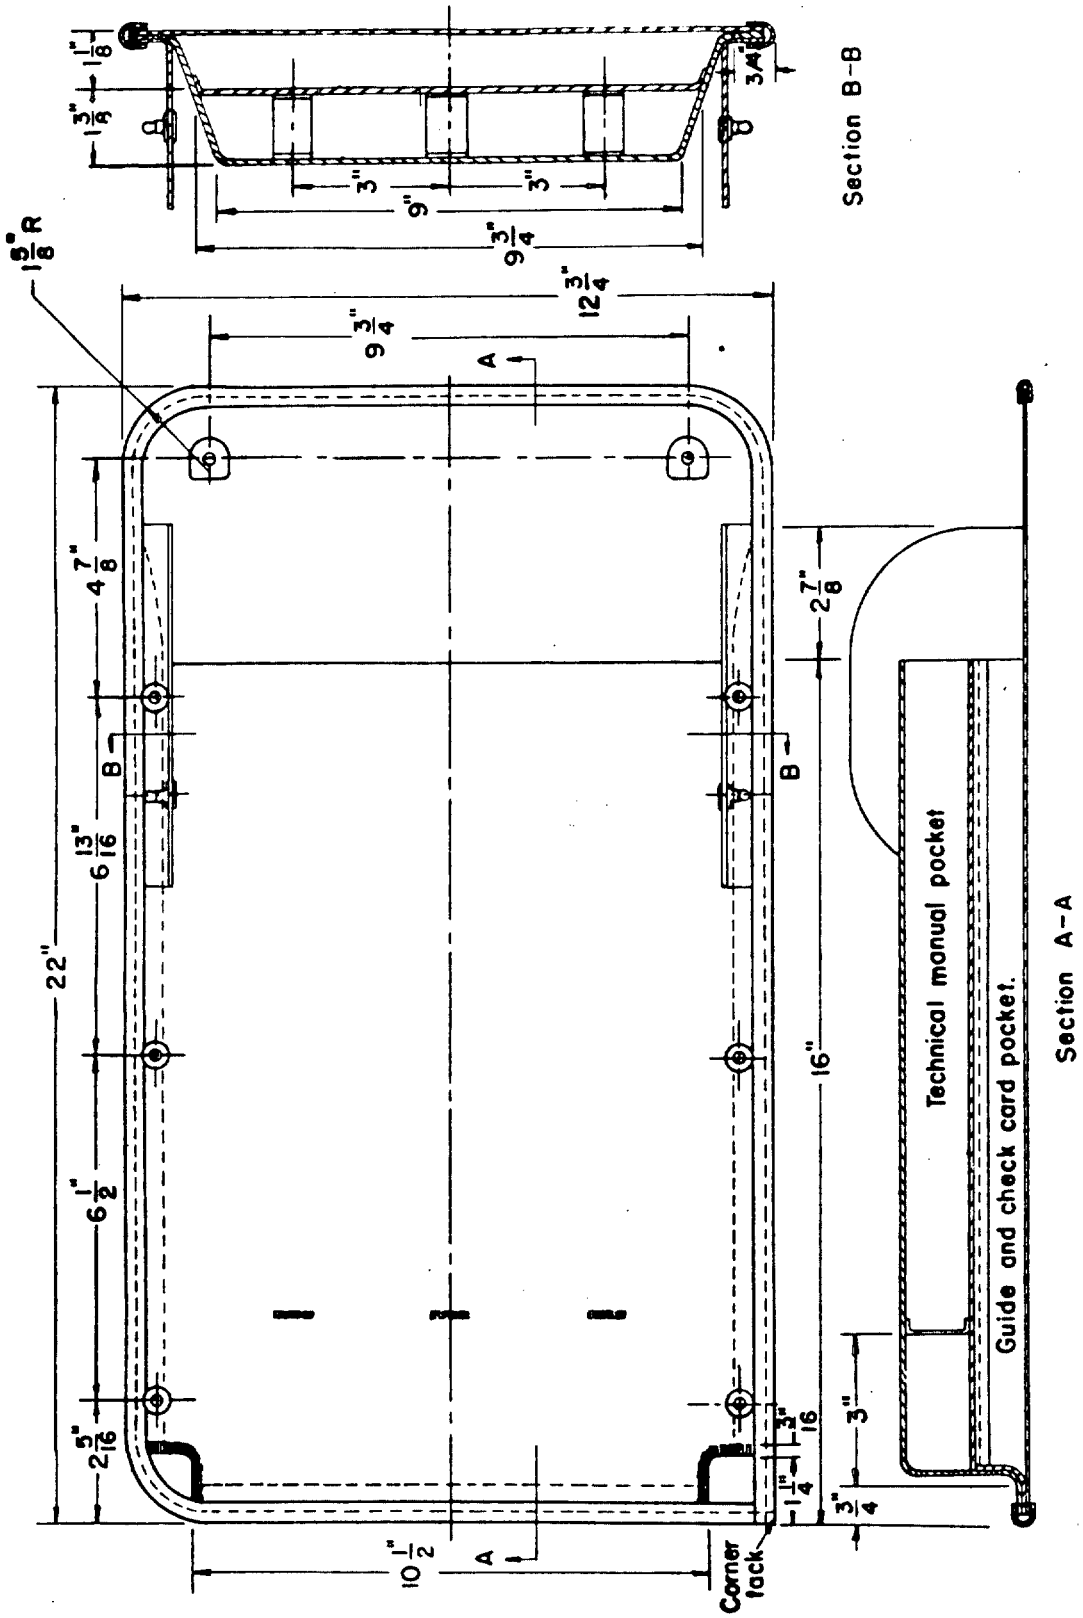

X-3222

FIGURE 2. Pocket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

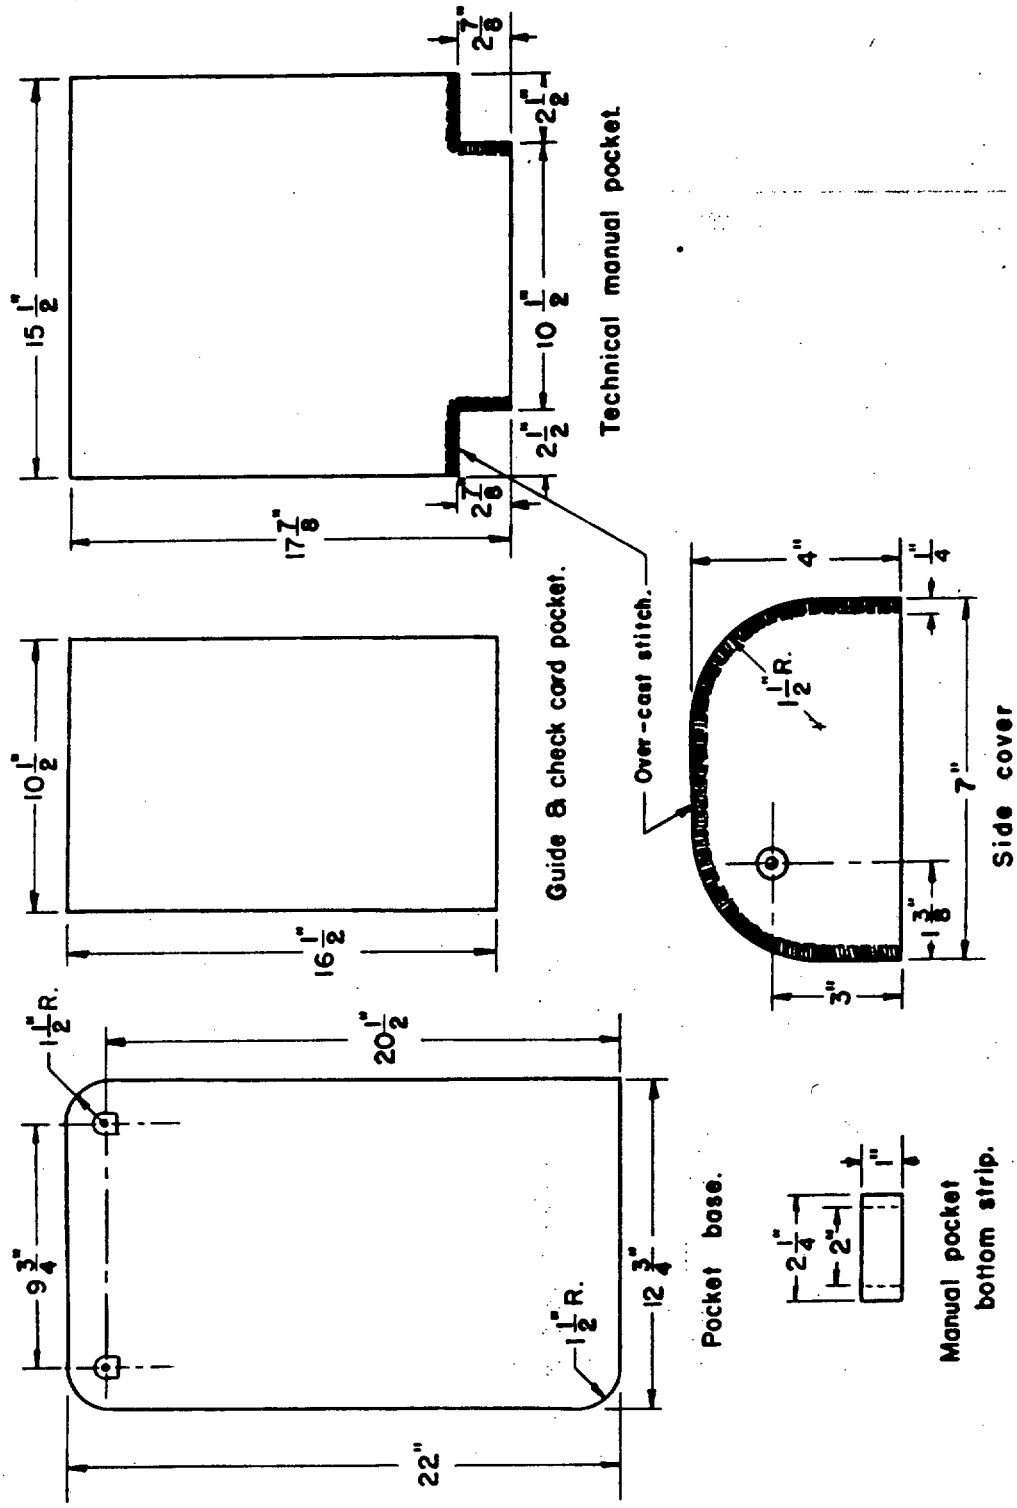


FIGURE 3. Details, component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-11743F	Case, Maintenance and Operational Manuals

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir RD&E Center
ATTN: STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:55Z
Check the source to verify that this is the current version before use.