MIL-M-11726E(ME)
18 May 1982
SUPERSEDING
MIL-M-11726D(ME)
2 April 1976

MILITARY SPECIFICATION

MANIFOLDS, AIR LINE; ONE TO SEVEN OUTLETS


This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types of manifolds for use with standard military compressors.

1.2 Classification. Manifolds shall be the following types and classes and shall be designated by the applicable definitive military specification part number (see 6.2 and 6.4).

1.2.1 Definitive military specification part number. Manifolds covered by this specification shall be designated in the following form (see 6.2):

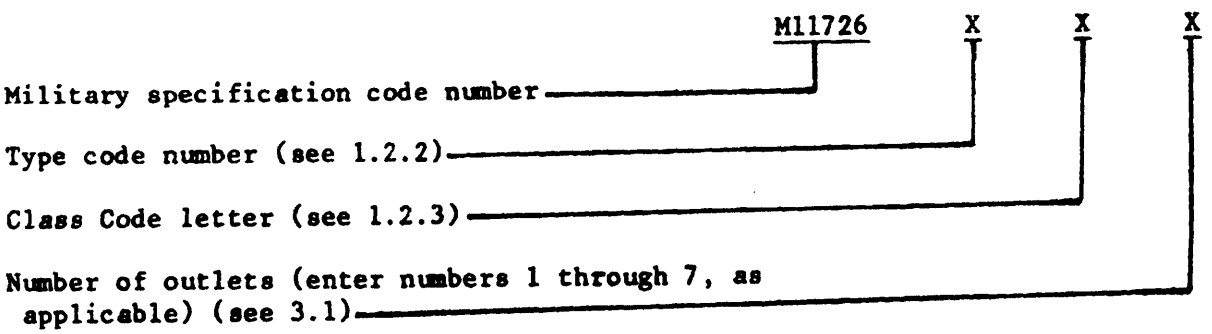

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

1.2.2 Body. The body is identified by a digit (see table I).

TABLE I. Body code number.

Code Number	Body
1	type I - Pipe body
2	type II - Malleable cast iron body

1.2.3 Inlet and outlet. The inlet and outlet is identified by a single letter (see table II).

TABLE II. Inlet and outlet code letter.

Code letter	Inlet and outlet
A	Class A - 2-1/2-inch inlet, 1-inch outlet, 150 pounds per square inch (psi).
B	Class B - 2-inch inlet, 1/2-inch outlet, 100 psi.
C	Class C - 1-1/4-inch inlet, 1/2-inch outlet, 90 psi.
D	Class D - 2-1/2-inch inlet, 1-1/4-inch outlet, 150 psi.
E	Class E - 2-1/2-inch inlet, 3/4-inch outlet, 150 psi.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall

STANDARDS

FEDERAL

FED-STD-H28/7	- Screw-Thread Standards, for Federal Services, Section 7, American Standard Pipe Threads (except Dryseal and Hose Coupling types).

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A 47	- Malleable Iron Castings.
ANSI/ASTM A 53	- Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:54Z
Check the source to verify that this is the currentversion before use.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The manifolds shall be made of extra strong pipe or malleable cast iron as determined by type (see 1.2 and 6.2). The rated operating pressure shall be determined by class (see 1.2 and 6.2). The manifolds shall have from one to seven outlets as specified (see 6.2). Outlets shall be centered (in a horizontal plane) so that, when stopcocks are used, the stopcocks can be operated without interference from the adjoining stopcocks. The manifolds shall be threaded for specified inlet and outlet pipe sizes (see 1.2 and 6.2) and these threads shall be American National Standard Pipe Threads (NPT) conforming to FED-STD-H28/7. Malleable cast iron plugs shall be furnished and inserted in all outlets.

3.2 First Article. When specified, (see 6.2) a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.5 and 6.7).

3.3.1 Steel pipe. The pipe for type I manifolds shall conform to ANSI/ASTM A 53, type S, grade B.

3.3.2 Cast iron. The malleable cast iron for type II manifolds shall conform to ANSI/ASTM A 47, grade 32510.

3.4 Identification marking. The manifold shall be identified in accordance with MIL-STD-130. Special characteristics marking to include working pressure called for in MIL-STD-130 shall be included.

3.5 Treatment and painting. The outside of the manifold shall be cleaned, treated, and painted in accordance with the manufacturer's best commercial practice.

3.6 Workmanship.

3.6.1 Type I manifolds. The type I manifolds shall be clean and free from defects such as incomplete welds, inadequate fusion between parts and pipe, rust, cracks, and other defects that could impair the operation or life of the manifold.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

3.6.2 Type II manifolds. The type II manifolds shall have a uniform finish and shall be free of harmful primary graphite, shrinks, cold shuts, cracks, blowholes, porosity, and other defects that could render the manifold unsuitable for the purpose intended.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article manifold shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article manifold shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and test shall be in accordance with MIL-STD-105.

4.4.2 Examination.

4.4.2.1 Individual. Each manifold shall be examined for the critical defects specified in 4.5.1. Presence of a critical defect shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:54Z
Check the source to verify that this is the currenversion before use.

4.4.2.2 Samples. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective for major defects.

4.4.3 Test.

4.4.3.1 Samples. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The manifolds shall be examined as specified herein for the following defects:

Critical

1. Weldment crack or incomplete fusion on welded steel pipe or between parts.
2. Holes in cast iron manifold.

Major

101. Materials not as specified.
102. Dimensions or clearances not as specified.
103. Assembly incorrect or not complete.
104. Parts or components do not function.
105. Identification marking missing, incomplete, or illegible.
106. Workmanship not as specified.

4.5.2 Test.

4.5.2.1 Hydrostatic test. Each type of manifold shall be subjected to a hydrostatic test of twice the operating pressure specified in 1.2 for 10 minutes. Any leak shall constitute failure of the test.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:54Z
Check the source to verify that this is the currentversion before use.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

107.	Containers not as specified for level A or B.
108.	Fitted plugs not installed in the manifold as specified for level A, or commercial.
109.	Box closure not as specified for level A preservation.
110.	Strapping not as specified for level A.
111.	Preservation and packing not in accordance with the referenced document for commercial.
112.	Marking illegible, incorrect, incomplete, or missing for level A, B, or commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each manifold, with fitted plugs installed, shall be placed and blocked to prevent movement in a close-fitting box conforming to PPP-B-636, W5c, style RSC. Box closure shall be in accordance with method V of the appendix to the box specification.

5.1.2 Commercial. Manifolds with fitted plugs installed shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2).

5.2.1 Level A. Manifold assemblies preserved as specified in 5.1 shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional in quantities not to exceed the weight limitations of the box. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be finish A.

5.2.2 Level B. Manifold assemblies shall be packed in boxes as specified for level A, except that boxes shall be domestic type. As an alternate, boxes conforming to PPP-B-640, class 2, style optional may be used when the combined weight or size of the assemblies to be packed together does not exceed the limitations of the box specification. Box closure and strapping of all boxes shall be in accordance with the appendix to the applicable box specification.

5.2.3 Commercial. Manifold assemblies shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:54Z
Check the source to verify that this is the currentversion before use.

5.3.2 Commercial. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The manifolds are intended for connecting individual air lines to the main supply where several applications are required near the supply.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Definitive military specification part number required (see 1.2, 3.1, and 6.4).

c. When a first article is required for inspection and approval (see 3.2, 4.3 and 6.3).

d. Degree of preservation and degree of packing required (see 5.1 and 5.2).

e. When strapping shall be other than as specified (see 5.2.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a sample selected from the first five production items. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangemnts for examinations, test approval of the document's first article.

6.4 Definitive military specification part number. The military specification part number is a definitive part number which corresponds to the type code number, class code letter, and the number of outlets provided with the manifolds covered by this specification. The specification number, the type code number, the class code letter, and the number of outlets are combined to form the definitive military specification part number.

6.5 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:54Z
Check the source to verify that this is the currentversion before use.

6.7 Materiel deterioration prevention and control (MADPAC). the contracting officer should consider for inclusion in all applicable invitations for bid, requests for proposal, and contracts the following statement:

"The technical proposal shall provide assurance that all system/item parts shall be fabricated from compatible materials, suitably finished, to provide protection from corrosion and other forms of materiel deterioration. The assurance shall be in the form of a finish plan, utilizing state-of-art technology, which clearly identifies the specific finish or treatment to be used on the various components and assemblies, to provide protection against the various forms of materiel deterioration in the applicable operating and storage environments to which they may be exposed."

Custodian:
Army - ME

Review activity:
DLA - CS

Preparing activity:
Army - ME

Project 4730-A327

Source: https://assist.dla.mil -- Downloaded: 202640-17T21:54Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-M-11726E(ME) Manifolds, Air Line; One to Seven Outlets

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment R & D Command
ATTN: DRDME- DS
Fort Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:54Z
Check the source to verify that this is the current version before use.