MIL-P-11719E
26 October 1977
SUPERSEDING
MIL-P-11719D
18 September 1975

MILITARY SPECIFICATION

PACKING, PREFORMED; PNEUMATIC HOSE COUPLINGS, UNIVERSAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a 3/4-inch preformed rubber packing for use with pneumatic hose couplings.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
WW-C-633	- Coupling, Hose (Half), Pneumatic, Universal Type.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

FSC 5330

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-G-1149	- Gasket Material, Synthetic Rubber 50 and 65 Durometer Hardness.
MIL-R-3065	- Rubber, Fabricated Products.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 2000 - Rubber Products in Automotive Applications, Classification System For.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

RUBBER MANUFACTURERS ASSOCIATION, INC. (RMA)

Rubber Handbook, Specifications for Rubber Products, Molded, Extruded, Lathe-Cut, Open and Closed Cell Sponge.

(Application for copies should be addressed to the Rubber Manufacturers Association, Inc., 444 Madison Avenue, New York, NY 10022.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Description. The preformed packing shall be as shown in Figures 1 or 2 and as specified herein.

3.2 Material.

3.2.1 Preformed packing. Material for the preformed packing covered in Figure 1 shall conform to the requirements of ASTM D 2000, 2 BC, 715, A14, B14, E34 and F17. Figure 2 shall conform to MIL-G-1149, Type II, Class 1, except that the hardness, durometer units shall be 60 ± 5 or in accordance with ASTM D 2000 2BC, 615, A14, B14, E34 and F17 (see 6.3).

3.3 Dimensions.

3.3.1 Preformed packing. Dimensions and tolerances shall be as shown in Figures 1 and 2 and as follows. The packing illustrated in Figure 2 shall be capable of being reversed for reuse after the first side placed in use has become unservicable.

3.3.1.1 Concentricity. All diameters molded by the same piece of metal shall be concentric within 0.010 total indicator reading (TIR). Other diameters shall be concentric within 0.030 TIR.

3.3.1.2 Flash variation. The preformed packing shall have neither vertical nor radial flash lines. Circumferential flash lines shall conform to RMA T.032.

3.3.1.3 Finish. Finish shall conform to RMA F-1 on the surfaces encompassed by Dimensions D1 and J for Figure 1 and to Dimensions A and E for Figure 2. The finishes on all other surfaces of the packing shall conform to RMA F-3.

3.4 Workmanship. The preformed packing shall be uniform in construction and appearance and free of porous areas, sponginess, flash on a critical surface, weak sections, blisters, bubbles, foreign matter, and other defects affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Lot. An inspection lot shall be as specified in MIL-R-3065.

4.3.2 Sampling. Sampling of packing for examination and tests shall be in accordance with MIL-STD-105, as specified in MIL-R-3065.

4.3.3 Examination. Packing selected in accordance with 4.3.2 shall be examined for the defects specified in 4.4.1. AQL shall be as specified in MIL-R-3065.

4.3.4 Tests. Packing selected in accordance with 4.3.2 shall be tested as specified in 4.4.2.

4.4 Inspection procedure.

4.4.1 Examination. Packing shall be examined for the following major defects; and as specified in MIL-R-3065.

101. Material not as specified.
102. Dimensions not as specified.
103. Flash variation not as specified.
104. Workmanship not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

4.4.2 Tests. Tests shall be in accordance with the applicable tests specified in MIL-R-3065. AQL shall be 4.0 percent defective.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completely processed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

105.	Materials, methods, and containers not as specified for Level A or B. Each incorrect material, method, or container shall be considered one defect.
106.	Consolidated quantities not as specified for Level A or B.
107.	Unlike items packed together for Level A or B.
108.	Fiberboard boxes not closed and sealed as specified for Level A preservation and for Level B packing.
109.	Strapping not as specified for Level A.
110.	Gross weight or size exceeds the limitations of the applicable box specification for Level A or B.
111.	Marking missing, illegible, incorrect, or incomplete for Level A, Level B, or Commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.1.1 Level A. The preformed packing shall each be preserved in quantities of 25 in accordance with MIL-P-116, Method IC-1.

5.1.1.1 Intermediate pack. The preformed packing preserved as specified in 5.1.1, shall each be consolidated in quantities of 300 in 12 unit packs placed in a close-fitting box conforming to PPP-B-636, W5c or W6c. The box shall be closed and sealed as specified for Method V in the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. The preformed packing shall be preserved in a manner to assure protection against deterioration and damage from the contractor to the initial destination.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. The preformed packing, preserved as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional, in quantities not to exceed the weight limitation of the box. Only items of like description shall be contained within the same box. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.2.2 Level B. The preformed packing preserved as specified in 5.1, shall be packed in a close-fitting box conforming to PPP-B-636, V3c, style optional, in quantities not to exceed the size or weight limitations of the box. Only items of like description shall be contained within the same box. Box closure and sealing shall be as specified for Method V in the appendix to the box specification.

5.2.3 Commercial. The preformed packing, preserved as specified in 5.1, shall be packed to assure carrier acceptance and safe delivery to destination at lowest ratings in fiberboard boxes complying with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall reflect as a minimum, the item name, National Stock Number, quantity, unit of issue, contract number, and appropriate address markings on the shipping container. The marking shall be applied with a waterproof material, shall be legible, and shall provide a definite contrast.

6. NOTES

6.1 Intended use. The preformed packing is intended for use with 3/4-inch pneumatic couplings conforming to WW-C-633.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Degree of preservation and packing required (see 5.1 and 5.2).
(c) When other than Finish B strapping is required (see 5.2.1).

6.3 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2.1).

Custodians:
Army - ME
Navy - YD
Air Force - 99


Preparing activity:
Army - ME

Project 5330-0478

Review activities:
Army - AT, IS

User activity:
Army - CS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

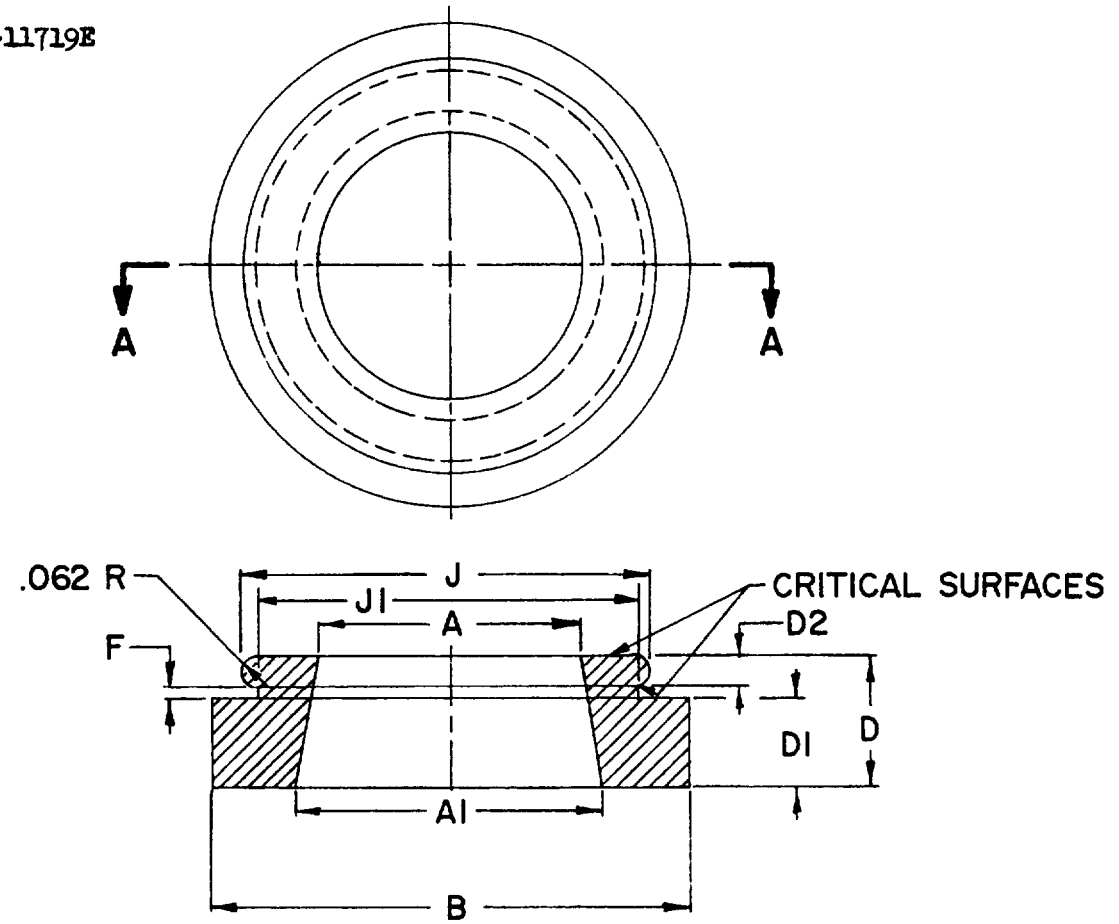


SECTION A-A

A	- 0.750	± 0.010	D2	- 0.094	± 0.010
A1	- 0.875	± 0.010	F	- 0.062	± 0.010
B	- 1.375	+0.005 -0.000	J	- 1.187	± 0.015
D	- 0.375	± 0.015	J1	- 1.093	± 0.015
D1	- 0.219	± 0.015			

NOTE
ALL DIMENSIONS ARE IN INCHES

Figure 1. PACKING, PREFORMED; OVERALL VIEW AND DIMENSIONS. X893B

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

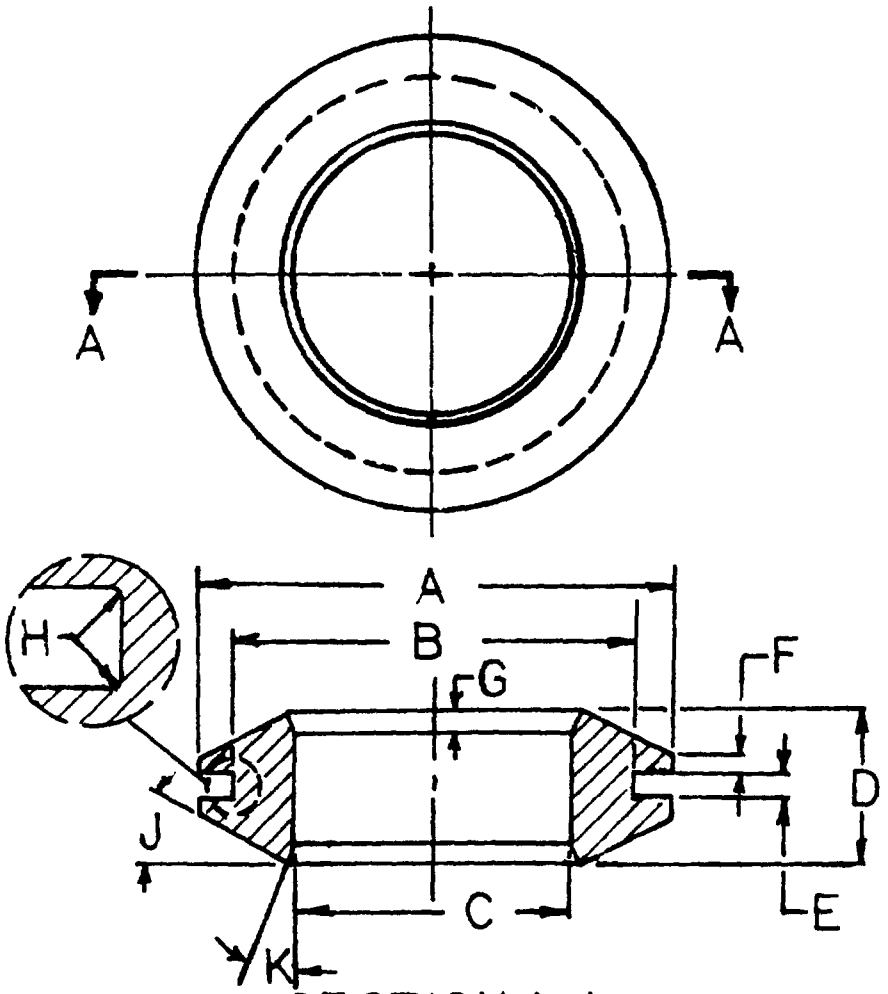

A = 1.385 Ø	F = .040 2PLS
B = 1.160 Ø	G = .125 2PLS
C = .810 Ø	H = .015R
D = .451	J = 30° 2PLS
E = .070	K = 15° 2PLS

FIGURE 2. Packing, preformed; overall view and dimensions.

X-3977

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-11719E Packing, Preformed; Pneumatic Hose Couplings, Universal

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.

MIL-P-11719E
AMENDMENT 1
25 September 1984

MILITARY SPECIFICATION

PACKING, PREFORMED; PNEUMATIC HOSE

COUPLINGS, UNIVERSAL

This amendment forms a part of Military Specification MIL-P-11719E, dated 26 October 1977, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.2, under "Other publications, AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)", add:

"D 3951 - Standard Practices for Commercial Packaging."

Under "NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT", delete in its entirety.

Under "RUBBER MANUFACTURERS ASSOCIATION, INC. (RMA)," in address, delete "444 Madison Avenue, New York, NY 10022" and substitute "1400 K Street N.W., Washington, DC 20005".

PAGE 3

3.2.1, under "Preformed packing", line 3, delete "715" and substitute "615".

PAGE 6

5.1.2, delete and substitute "5.1.2 Commercial. The preformed packing shall be preserved in accordance with ASTM D 3951."

5.2.3, delete and substitute "5.2.3 Commercial. The preformed packing, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951."

5.3.2, delete and substitute "5.3.2 Commercial. Commercial marking shall be in accordance with ASTM D 3951. Additionally, each shipping container shall be marked with the cube and weight."

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review activity:
Army - AT
Air Force - 82
DLA - IS, CS

Preparing activity:
Army - ME

Project 5330-0587

FSC 5330

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:53Z
Check the source to verify that this is the current version before use.