AA-C-00300F (GSA-FSS)
July 10, 1990
SUPERSEDING
Int. Fed. Spec.
AA-C-00300E (GSA-FSS)
September 15, 1988
INTERIM REVISION OF
Fed. Spec. AA-C-300a
March 17, 1953

INTERIM FEDERAL SPECIFICATION

CHAIRS, WOOD, EXECUTIVE OFFICE, TRADITIONAL

This Interim Federal Specification was developed by Engineering Division, Federal Supply Service, Furniture Commodity Center, Washington, D.C. 20406 based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-C-300A, dated March 17, 1953.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for the component materials and their assembly into upholstered office chairs of traditional design.

1.2 Classification.

1.2.1 Types, styles and classes. The chairs shall be of the following types, styles and classes, as specified (see 6.2).

Type I - Straight chair
  Style A - Side chair with arms (figures 1 and 2)
    Class 1 - Leather seat and back
    Class 3 - Vinyl seat and back

  Style B - Side chair without arms (figure 3)
    Class 1 - Leather seat and back
    Class 3 - Vinyl seat and back

  Style C - Fiddle-back chair with arms (figures 4 and 5)
    Class 1 - Leather seat, back and arms
    Class 3 - Vinyl seat, back and arms

Type II - Rotary, tilting, fixed seat and back (figures 6 and 7)
  Style A - with star base
    Class 1 - Leather seat, back and arms
    Class 2 - Fabric seat, leather back and arms

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Type II, Style A (continued)

Class 3 - Vinyl seat, back and arms
Class 4 - Fabric seat, vinyl back and arms

Style B - with jury base
Class 1 - Leather seat, back and arms
Class 2 - Fabric seat, leather back and arms
Class 4 - Fabric seat, vinyl back and arms

Type III - Rotary, posture, fixed seat, tilting back (figure 8)
Class 1 - Leather seat, back and arms
Class 2 - Fabric seat, leather back and arms
Class 3 - Vinyl seat, back and arms
Class 4 - Fabric seat, vinyl back and arms

Type IV - Rotary, tilting, fixed seat and high back (judges)
Style A - with head roll (figure 9)
Class 1 - Leather
Class 2 - Fabric seat, leather back and arms
Class 3 - Vinyl seat, back and arms
Class 4 - Fabric seat, vinyl back and arms

Style B - without head roll (figure 10)
Class 1 - Leather
Class 2 - Fabric seat, leather back and arms
Class 3 - Vinyl seat, back and arms
Class 4 - Fabric seat, vinyl back and arms

Type V - Rotary, secretarial posture without arms (figure 11)
Class 1 - Leather seat and back
Class 2 - Fabric seat, leather back
Class 4 - Fabric seat, vinyl back

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:
FF-C-82 - Casters, Swivel, Chair
CCC-A-680 - Artificial Leather (Cloth Coated), Vinyl Resin, Expanded Layer (Upholstery)
CCC-C-540 - Cloth, Upholstery

Federal Test Method:
Standard No. 191 - Federal Standard for Textile Test Methods
Standard No. 311 - Leather, Method of Sampling and Testing(Federal Specifications and Federal Test Methods are available, for bidding purposes, from General Services Administration, Business Service Centers in Boston; New York;

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Seattle, WA.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes.

(Military Standards are available for bidding purposes from Naval Publications and Forms Center, 5801 Tabor Ave., Philadelphia, PA 19120.)

U.S. Department of Agriculture Handbook:

Forest Service Agriculture Handbook No. 72 - Wood Handbook

(Available from U.S. Superintendent of Documents, U.S. Government Printing Office, Washington DC 20402.)

2.2 Commercial and State Standards and Publications.

American National Standards Institute Publications

ANSI/HPMA HP-1983	-	Standard for Hardwood and Decorative Plywood
ANSI X5.1-1985	-	General Purpose Office Chairs - Tests
ANSI/NFPA 260 -1989	-	Cigarette Ignition Resistance of Components of Upholstered Furniture

(ANSI standards are available from American National Standards Institute, Inc. 1430 Broadway, New York, NY 10018.)

American Society for Testing and Materials Standards:

D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear by Compression Loading.
D 1233 - Twine made from Bast and Leaf Fibers.
D 1682 - Breaking Load and Elongation of Textile Fibers.
D-2256 - Breaking Load (Strength) and Elongation of Yarn by the Single-Strand Method.
D-3770 - Standard Specification for Flexible Cellular Materials - High Resilience Polyurethane Foam(HR).
D-3776 - Mass per Unit Area (Weight) of Woven Fabrics.
D-3884 - Abrasion resistance of textile fabrics (Rotary Platfoam, Double Head Method).

(ASTM Standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Upholstery Furniture Action Council Test Methods

UFAC Flammability Test Methods for Upholstered Furniture Components - 1983

(UFAC test methods are available from UFAC, Box 2436, High Point, NC 27261)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

State of California Technical Information Bulletin

Bulletin 117 - 1980 - Requirements, Test Procedures and Apparatus for Testing the Flame Retardance of Resilient Filling Materials Used in Upholstered Furniture

(State of California Technical Bulletin is available from California Department of Consumer Affairs, Bureau of Home Furnishings, North Highland, CA)

3. REQUIREMENTS

3.1 Materials. The following paragraphs describe minimum requirements for materials used in construction and assembly.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.1.1 Wood.

3.1.1.2 Varieties. The wood and veneer used in the construction of the exposed components shall be walnut or cherry. Only one species is permitted on any one chair. The wood used in the construction of the unexposed components shall be domestic hardwood which meets the following requirements at 12% moisture content. See Wood Handbook, USDA No. 72.

Modulus of Rupture - 68,000 Kilopascals min.
Modulus of Elasticity - 9,500 Megapascals min.

3.1.1.3 Characteristics. The solid wood used for exposed parts shall be bright, well sanded, and free from brashness, discolorations, worm holes, honeycomb, splits, and shake. The wood for steam bent parts shall be selected from long straight grained uniform stock. The wood used for unexposed parts may contain small defects, such as pin knots, sapwood, or mineral streaks provided the strength of the part is not affected.

3.1.1.4 Plywood. All plywood shall be 5 ply, a minimum of 1/2 inch thick, and constructed in accordance with the requirements of ANSI HP-1983 and as specified herein. Minimum type II bond is required. Crossbanding shall be not less than grade 2. Exposed faces of plywood chair backs shall have grade 1 walnut or cherry veneer, either plain sliced or flat cut and matched for color and grain to present a uniform appearance. Grade 2 veneer minimum shall be used on unexposed faces of backs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.1.1.5 Seasoning. All wood shall be thoroughly air-seasoned and then uniformly kiln-dried without honeycomb or case hardening to a moisture content of 5 percent. At the time of assembly, moisture content shall not exceed 7 percent. Parts which require steam bending shall be air-seasoned before bending, and uniformly kiln-dried to a moisture content of 5 percent after bending is completed. Kiln-dried parts shall be allowed to temper approximately 2 weeks in a sheltered area to equalize moisture before milling. Steam bent parts shall remain in forms or shackles until drying is completed.

3.1.2 Dowels. Dowels shall be of beech, birch, hickory, or maple and have a maximum 5% moisture content at time of assembly. They shall be spirally or longitudinally grooved. Unless otherwise specified herein, dowels shall have a minimum diameter of 3/8 inch and the length shall be not less than 4 times the diameter.

3.1.3 Adhesive. Block shear strength: 2800 lb/in minimum. See test procedure paragraph 4.4.1.

3.2 Upholstery materials and flammabiltiy requirements.

All upholstery cover materials, welts, interior fabrics, fillings, and paddings shall meet NFPA-260 Class 1 construction, or UFAC Class 1 flammability requirements. All polyurethane foam shall meet California Technical Bulletin 117, Section A, Part I and Section D, Part II.

3.2.1 Fabric. The fabric shall conform to type III of CCC-C-540. The color selection is specified in 3.6 (see 6.2).

3.2.2 Leather. Top grain, dyed full depth. The color selection is specified in 3.7 (See 6.2)

Requirements: (See 4.4.7 for test methods.)
Thickness - 2 to 3 oz.
Breaking force (grab Method) - 100 lb. minimum
Elongation - 40% maximum stretch.
Stitch tear (double hole) - 15 lb minimun
Crocking (colorfastness,
resistance to rubbing) - Dry: 8.5 Munsell or better
Wet: 6.5 Munsell or better.
Blocking - Specimens must separate with ease and show no grain damage.
pH - 3.3 to 5.0
Fade resistance (colorfastness) - Little or no change in color or finish.
Abrasion resistance - No signs of the finish wearing through (except for gloss change).
Flexibility - Fine cracks, no russet showing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.3 Vinyl. Class 2, treatments (a)1 and (b) of CCC-A-680 with following exceptions permitted.

Base cloth: Minimum 3.2 oz./sq. yd., (terry) loop knit polyster.
Total weight: Minimun 20 oz./sq. yd.
All other requirements must be met. The color selection is specified in 3.8 (see 6.2).

3.2.4 Cambric. Black or grey non-woven fabric, 1.9 oz./sq. yd. (minus 0.08). Test procedure 4.4.3.

3.2.5 Polyester fiberfill batting. Garnetted (not resinated), min. 2 oz/ft^2 (test procedure 4.4.3), 5.5 to 16 denier, hollow and slickened, branded polyester fiber (branded by fiber producer).

3.2.6 Garnetted batting.
Garnetted material, smoothly carded, clean and free of foreign matter, made in unbroken laminated sheets.
Felt weight: 18.7 oz/sq.yd. minimum (Test procedure 4.4.3) unless otherwise specified..

3.2.7 Wadding/thin fiber batting.
White, cotton or synthetic fibers, 3/16 to 9/16 inch thick, smoothly carded, thermally bonded, or resin treated.
Weight: 1.8 to 4.5 oz/sq.yd. (Test procedure 4.4.3)

3.2.8 Twine

3.2.8.1 Sewing and quilting twine. Minimum breaking strength 65 lbs. when tested as specified in 4.4.4.

3.2.8.2 Spring-up seat twine. 6 ply minimum, minimum breaking strength 200 lbs. when tested as specified in 4.4.4.

3.2.8.3 Spring-up back twine. 4 ply minimum, minimum breaking strength 200 lbs. when tested as specified in 4.4.4.

3.2.9 Welts

3.2.9.1 Seam welts. Welts shall be of leather/artificial leather uniformly drawn over a suitable 5/32 inch minimum core.

3.2.9.2 Bumper welts. Leather/artificial leather uniformly drawn over a resilient 10/32 inch minimum core.

3.2.9.3 Double bumper welt. Consists of a double welt sewn hard cord core. It shall be stapled to the chair in between the welts. The staples shall not be visible in between the welts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

The double welt shall not be over 9/16 inch wide and shall be sewn with no cut stitches. As an alternative to the bumper on the arms, a sewn min. 10/32 resilient core bumper welt may be neatly and securely attached to the arm underside. The sewn bumper welt shall not have stitching or stapling visible in the normal use position and the arm underside shall be covered with cambric.

3.2.10 Sheet fabric. For use over foundation springs. Polypropylene, woven - 3 oz./sq.yd. minimum (Test procedure: 4.4.3).

3.2.11 Webbing. Any of the following materials are acceptable for the application listed. When installing, pull tightly and securely attach to frame.

Strip webbing (seat) - Polypropylene, selvage edge both sides.
Width: 3-1/2 inches minimum.
Breaking strength, warp direction: 300 pounds minimum. (Test procedure: 4.4.5)

Strip webbing (back) - Polypropylene, selvage edge both sides.
Width: 3-1/2 inches minimum.
Breaking strength, warp direction: 270 pounds minimum. (Test procedure: 4.4.5)

Sheet webbing (seat or back) - Polypropylene plain woven.
Weight: 5 oz./sq.yd. minimum. (Test procedure: 4.4.3).
Breaking strength, warp and fill direction: 200 pounds minimum.
(Test procedure: 4.4.5)

3.2.12 Polyurethane foam.

Seat: Slab or moulded, high resilience type, polyurethane foam with a minimum 2.2 lb/cu.ft. polyurethane polymer density.
31 to 39 Indentation Force Deflection (IFD) (25 percent deflection) required for chairs with springs.
Minimum 38 IFD (25 percent deflection) required for Type V secretarial chair. IFD shall be high enough to provide a comfortable seat that will not bottom out.

Back: Slab or moulded, conventional or high resilience type polyurethane foam with a minimum 1.5 lb/cu.ft. polyurethane polymer density. 24 to 30 IFD (25 percent deflection) required. Type V secretarial chair may have higher IFD, if necessary to provide a comfortable back.

Arms: Slab or moulded, or high resilience type polyurethane foam with a minimum 2.2 lb/cu.ft. polyurethane polymer density. Minimum 31 IFD (25 percent deflection) required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

All foam shall have a minimum recovery ratio of 70% when tested as specified in 4.4.6 and meet flame retardant requirements in 3.2. Flame retardant additivies are permitted. Pull strips are required for attaching foam to frame. Foam shall be buffed when necessary, to provide required final appearance.

3.2.13 Seat and back foundation springs. Any steel coil or sinuous wire spring system is acceptable provided it meets test requirements in 4.5 and comfort requirements in 3.4.1. Stabilize springs together with twine (3.2.8.2) knotted to the springs. Squeaks, clicks, or other noise is not acceptable.

3.2.14. Upholstery nails. The upholstery nails for the outside trim shall be convex-head No. 9 natural brass. Individual nails required.

3.3 Hardware.

3.3.1 Casters. The casters for all rotary chairs shall conform to type III (ball bearing swivel) size B, 2 inch diameter wheel, material 1 - hard rubber composition wheel with soft rubber tread (nonmarking) of FF-C-82. Casters shall be hooded type (see figures) with a satin brass finish. Furniture manufacturer is responsible for ensuring that caster hood finish, and scuff plate finish match each other.

3.3.2 Glides (for Type I chairs). Steel, cushioned nail type with antique finish in brass, bronze, or copper, 1-1/16 inch dia. base, and min. 3/4 inch long serrated nail.

3.3.3 Ventilators. Ventilators shall be brass or bronze with fine perforations or brass wire screening. Minimum outside diameter: 3/4 inch.

3.3.4 Rotary mechanisms.

All chairs except the type I and type II, style B shall have a suitable metal rotary mechanism having four contact points to the platform (underside frame of the seat), tension adjustment for back tilt, and a positive adjustment for height of seat of 2 inches minimum.

Type III and type V chairs shall have, in addition to the above requirements, a positive adjustment for height of back, independent of the seat, and a positive adjustment for horizontal position of the back.

Adjustments for tilting shall be by means of a suitable hand-wheel conveniently located at the front or rear of the chair swivel and tilt mechanism. Adjustment for raising shall be by

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

means of a suitable handwheel located concentrically on the pivotal axis of the chair and shall be self-locking and permit swiveling. The mechanisms shall operate and rotate freely and easily without turning the base, and be free from play or wobble. Rotary mechanisms shall have a positive stop in upper-most position to prevent seat from accidently disengaging from base.

All moving parts shall be properly graphite-lubricated. The metal surfaces of mechanisms shall be smooth and finished in dark brown enamel. The materials used shall be free from hazardous surfaces, rust, and other defects which affect appearance or which might affect the safety of the user, the durability or the serviceability of the finished mechanisms.

3.3.5 Stationary base and chair control. The stationary base for the type II, style B jury chairs shall be Collier-Keyworth Model No. 515 or equal. Self-centering swivel-tilt chair control, attached to base, shall return chair to starting position. The total height of the base and chair control mechanism shall be approximately 14 inches. All surfaces shall be thoroughly cleaned of grease or foreign matter and receive a prime coat and not less than one coat of baked enamel, color, (without graining) to match the overall color of the wood.

3.3.6 Scuff plates. The scuff plates shall be made of cast brass or cast bronze and shall be of the design shown in the figures. The castings shall be cast true, without noticeable air or sand holes or other defects appearing in the finished product, and shall be chased to a smooth and even surface. The bottom edges and corners shall be smoothed and rounded after assembly to the base to prevent scuffing the shoes of the user. All scuff plates shall have a satin brass finish to match casters and be coated with a clear, protective top coat. Attach each plate with four screws.

3.4 Construction/Design. The chairs shall be of traditional design, either leg or rotary type, as specified (see 1.2.1 and 6.2) and as shown in figures 1 through 11. They shall be constructed of solid hardwood frames, glued and doweled mortise and tenoned. Chairs are required to meet test requirements in 4.5. All leg chairs shall be furnished with glides and all rotary chairs except jury base with casters and scuff plates.

Cover chairs as specified below:

Class 1 - all leather (3.2.2)
Class 2 - fabric (3.2.1) seat top and leather covered seat boxing, welts, back and upholstered arms.
Class 3 - all vinyl (3.2.3)
Class 4 - fabric seat top and vinyl covered seat boxing, welts, back and upholstered arms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.1 Chair comfort. Seats shall be moderately firm and not "bottom out." In addition, spring seats shall have adequate "ride" and crown. Back shall be moderately firm and provide good lumbar support. Seat back, and arms shall be adequately and evenly padded to provide a comfortable chair.

Acceptability of "ride," firmness, padding, pitch, and comfort will be determined, during bid sample evaluation, by 7 or 9 member evaluation panel.

3.4.2 Tolerances. The following tolerances will be permitted:

Over-all width, depth, and height	- plus or minus 1/4 inch.
Height of arms from seat	- plus or minus 1/4 inch.
Dimensions of wood parts	- plus or minus 1/8 inch.
Dimensions of upholstered parts	- plus or minus 1/4 inch.
Dimensions between arms	- plus 1/2 inch minus 1/4 inch.
Contour of bent arm from top of arm to the rail (see figures 2 and 5)	- plus or minus 1/4 inch.
Depth of seat	- plus or minus 1/4 inch.

3.4.3 Arms

3.4.3.1 Arms for Type I and Type II chairs. See figures.

3.4.3.2 Arm padding. Pad arms to provide required comfort, appearance, and thickness. Cover arm with required upholstery material and welting as required for each arm type. See 3.4 and figures.

3.4.4 Star Bases. The star bases shall be shaped as shown in the applicable figures and shall consist of four legs which shall be received into a steel hub by means of a continuous steel dovetail extending the full length of the hub. The dovetail shall be tapered to provide a tight, wedge fit. Base assemblies shall be reinforced on the bottom by a rust-resistant steel or malleable-iron butterfly plate which shall be secured to the legs by means of eight 1-1/2 inch No. 12 screws (two screws to each base leg). The top shall be likewise fastened by four 2 inch No. 12 screws (one screw to each leg). Part-rounded wood filler blocks shall be recessed into adjoining legs to conceal the hub and shall be glued on one side only. The base assembly shall be free from play when moved in any direction. Accurately machine each leg to receive scuff plate, (3.3.6).

3.4.5 Joinery. All frames shall be rigidly constructed and assembled as shown in the figures and as specified herein. All exposed parts shall be of wood specified in 3.1.1.2. The seat

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

frame members shall be of any of the solid woods specified in 3.1.1.2 and unless otherwise specified, shall be a minimum of 1-1/16 inches thick. All joints shall be carefully fitted, thoroughly glued and secured with not less than two dowels, specified in 3.1.2, mortise and tenon, or screws and bolts. Corner blocks of any of the solid woods specified in 3.1.1.2 shall be carefully fitted, glued and secured by not less than one screw in each side. The corner blocks shall be not less than 1 inch thick and shall be the same height (to minus 1/4") as the rails. When wood plugs are used, the grain of the plug shall run the same as the piece into which it is fitted. All exposed squared edges shall be eased to a minimum of 1/16 inch radius.

3.4.6 Filling and Upholstery. Minimum filling requirements are described in construction paragraphs. Additional filling may be necessary to ensure the appearance and cushion dimensions comply with figures, with no hollows, voids, flat or hard spots. Frame members shall be padded. Filling and padding shall be installed to prevent shifting during use. Covers shall be tailored carefully and so applied that they are neat and tight, free from wrinkles and bulges. The type and number of stitches shall be suitable to meet all performance tests. Seam allowance shall be maintained and seams properly sewn so that no raw edges, run offs, broken or skipped stitches, twists, pleats or puckers result. Top and bottom threads shall be adjusted to the upholstery materials with proper tension so there will be no looped stitches, puckering of materials, or cracking when cover is stretched to fit the chair. Welts shall lie straight and uniform. Covers for all chairs shall be attached with tacks or staples. All chair seat bottoms shall be covered with cambric (3.2.4). Where upholstery nails are specified (see figures), the borders shall be uniform and the nails positioned slightly less than overlapping. Artificial leather or leather covered spring backs shall be furnished with a minimum of two ventilators (3.3.3). When upholstering in leather, place flank areas of the hide and healed scars in areas that are inconspicuous when chair is viewed by someone standing in front of the piece.

3.4.7 Type I, Style A and B straight chairs. The type I chairs shall be either with arms (style A) (figures 1 and 2) or without arms (style B) (figure 3).

3.4.7.1 Frame. The frame shall be as specified in 3.4.5. The back posts shall be of one piece of steam bent walnut. The back post shall become an integral part of the side rails and back rail. The arms for the style A chair shall be secured to the back post by means of 1/4 inch bolt as shown in figure 2. The arm stump shall be fitted over the seat rail and secured to the rail by means of a 1/4 inch bolt as shown in figure 2. All

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

exposed bolt heads shall be countersunk and concealed by carefully matched, flush wood plugs. Alternatively, the back post may be shaped, spliced, and double dowelled to an upper unexposed wood position of the post. Bandsaw exposed lower portion of back post to minimize crossgrain. Arms for Style A chair shall be as specified in figures.

3.4.7.2 Seat (Type 1, Style A and B straight chairs).
Spring system - (3.2.13)
Edge roll - Machine made,minimum 3/4", resilient product. Securely attach to four sides of seat frame.

Cover spring system with securely attached wire reinforced sheet fabric (3.2.10). Cover sheet fabric with any combination of polyurethane foam (3.2.12) and batting materials (3.2.5, 3.2.6, 3.2.7) to provide the required comfort, firmness, and final appearance. Cover with specified upholstery material (3.4) in accordance with 3.4.6. Apply upholstery nails as shown in figures.

3.4.7.3 Back (Type I, Style A and B straight chairs).
Construct inside back with following materials.
Sheet fabric (3.2.10) securely attached to frame.

Cover sheet fabric with any combination of foam (3.2.12) and/or batting (3.2.5, 3.2.6, 3.2.7) to provide the required comfort and uniform thin profile, final appearance.

Fill back cavity and pad outside back with any combination of foam (3.2.12) and or batting (3.2.5, 3.2.6, 3.2.7) to provide the required final appearance.

Cover inside and outside back with specified upholstery material (3.4) in accordance with 3.4.6. Apply upholstery nails as shown in figures.

3.4.8 Type I, Style C Straight chair, fiddle back, with arms.

3.4.8.1 Frame. Frame shall be as specified in 3.4.5 and figures.

3.4.8.2 Seat (Type I, Style C fiddle back chair).
Same as type I, style A and B chairs

3.4.8.3 Back and arm assembly (Type I, Style C fiddle back chair). See figures.

3.4.9. Type II, Style A and B, all classes, tilting, fixed seat and back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.9.1 Frame. Same as Type I, Style A chair except that arms are padded (3.4.3.2) and the bottom frame of the seat shall be attached to a rotary tilting star base (3.4.4) or swivel tilt stationary base (3.3.5) jury type as applicable.

3.4.9.2 Seat. Same as Type I, Style A chair.

3.4.9.3 Back. Same as Type I, Style A chair.

3.4.10 Type III rotary, posture chair.

3.4.10.1 Frame. The frame construction shall be as specified in 3.4.5. All arm stumps (front and back) shall be fitted over the seat rail and secured to the rail by means of a minimum 1/4 inch bolt and screw as shown in figure 6. The chair back post shall be secured to the metal back plate of the rotary mechanism by means of a screw and a minimum 1/4 inch carriage bolt with exposed smooth head finished in statuary bronze color. All exposed screw and bolt heads, except the carriage bolt, and the screws used to attach the back plate to the back posts shall be countersunk and concealed by matched side grain wood plugs. The screws used to attach the back plate to the back posts shall either be countersunk into the back plate or be button or round head design. Padded arms shall be as specified in (3.4.3.2).

3.4.10.2 Seat (Type III chair).
Spring system- (3.2.13).
Edge roll- Machine made minimum 3/4" resilient product. Securely attach to four sides of seat frame.
Cover coil spring system with securely attached sheet fabric (3.2.10)

Cover sinuous spring system with securely attached wire reinforced sheet fabric (3.2.10). Cover sheet fabric with any combination of polyurethane foam (3.2.12) and batting materials (3.2.5, 3.2.6, 3.2.7) to provide required comfort, firmness, and final appearance.

Cover seat and frame with specified upholstery material (3.4) in accordance with 3.4.6 to simulate a separate cushion as shown in figures.

3.4.10.3 Back (Type III chair).
Spring system - (3.2.13).
Edge roll - Machine made, 3/4" resilient product. Securely attach to two sides of back frame.

Cover spring system with securely attached sheet fabric (3.2.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Cover sheet fabric with any combination of polyurethane foam (3.2.12) and batting materials (3.2.5, 3.2.6, 3.2.7) to provide required comfort, firmness, and final appearance. Pad outside back. Cover entire back with specified upholstery material (3.4) in accordance with 3.4.6.

3.4.11 Type IV, Style A and B, all classes, rotary, tilting, fixed seat and back, with loose cushion (judges).

3.4.11.1 Frame. The frame shall be as specified in 3.4.5. Arm stump shall be fitted over the seat rail and secured to the rail by means of a 1/4 inch bolt and a screw as shown in figures 7 and 8. Padded arms (3.4.3.3). The back post shall become an integral part of the side rails and back rail.

3.4.11.2 Seat (Type IV chairs).
Spring system - (3.2.13).
Edge roll - Machine made, minimum 3/4" resilient product. Securely attach to four sides of seat frame.
Cover coil spring system with securely attached sheet fabric (3.2.10).
Cover sinuous spring system with securely attached wire reinforced sheet fabric (3.2.10). Cover sheet fabric with any combination of polyurethane foam (3.2.12) and/or batting materials (3.2.5, 3.2.6, 3.2.7) to insulate springs and provide required comfort, firmness, and final appearance when covered loose cushion.

Cover the four sides, and minimum 3 inches on four sides of the top, with specified upholstery material (3.4) in accordance with 3.4.6. Cover center portion with a minimum 5.6 oz/sq.yd., beige sateen, velvet or felt finished nylon material.

Loose cushion shall be reversible with a 4 inch thick, polyrethane (3.2.12) core. Shape foam when necessary, to ensure it properly fits cover. 3 1/2 inch boxing required on cover. Close back of cushion with sewn zipper, not visible in normal use position.

3.4.11.3 Back (Type IV chairs).
Spring system - (3.2.13).
Edge roll- Machine made, 3/4" resilient product. Securely attach to two sides of back frame.

Cover spring system with securely attached sheet fabric (3.2.10). Cover sheet fabric including head roll (style A chair), with any combination of polyurethane foam (3.2.12) and batting materials (3.2.5, 3.2.6, 3.2.7) to provide required comfort, firmness, and final appearance. Pad outside back. Cover entire back with specified upholstery material (3.4) in accordance with 3.4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.12 Type V, rotary secretarial posture chair.

3.4.12.1 Frame. The frame shall be rigidly constructed and assembled as shown in figure 11. All joints shall be carefully fitted and thoroughly glued and secured with dowels (3.1.2). The standard (backpost) of the back assembly shall be of walnut or cherry and shall be 1-1/16 inches thick. The back top rail shall be jointed at each end to the standards by two dowels. The lower end of the standards shall be attached to the back plate of the rotary mechanism by means of a No. 12 flat head screw countersunk in the back plate and a 1/4 inch bolt inserted through the standard, recessed and concealed by carefully matched side grain, flush wood plugs. The lock washer and nut shall be exposed on the inside of the back plate. The screw head and nut shall be finished the same as the back plate. The hinge used to join the backrest to the standard shall be of heavy metal, antique/oxidized brass or bronze. The hinge shall be attached to the backrest and top rail of back assembly by four screws and four rivets. The hinge shall operate on double springs to permit the backrest to tilt to either side of perpendicular, but to hold the backrest vertically when not in use. Alternatively two hinges may be used for joining the back rest to the back assembly. Each hinge shall be secured to the backrest and standard (backpost) by four screws. The seat shall be attached to the spider arms of the revolving and tilting mechanism by four 1/4 inch bolts.

3.4.12.2 Seat (Type V chair).
Seat pan - plywood (3.1.1.4) with minimun 5 vent holes. Cover seat pan with any combination of polyurethane foam (3.2.12) and batting materials (3.2.5., 3.2.6, 3.2.7) to provide required comfort, firmness, and final appearance. Cover seat with specified upholstery material (3.4) in accordance with 3.4.6.

3.4.12.3 Back (Type V chair).
Back panel-plywood (3.1.1.4) with double bumper welt (3.2.9.3). Cover back panel with polyurethane foam (3.2.12) to provide required comfort, firmness, and final appearance. Cover seat with specified upholstery material (3.4) in accordance with 3.4.6.

3.5 Exposed wood finish. Finish to match as closely as possible the overall color of GSA Standard Sample FSS-L-01002 walnut and be stained to equalize color. Suitable clear natural or synthetic top coat, 2 coat process with adequate "build" and a "semi-open pore" finish. Final finish shall have a 12° to 30° sheen and shall pass finish tests (4.4.2)

3.6 Fabric standard samples colors shall be FSS-F03009 Dark red, FSS-F-03010 Light blue, FSS-F-03011 Dark blue, FSS-F-03012 Green, FSS-F-03013 Brown, FSS-F-03014 Rust, FSS-F-03015 Dark beige, FSS-03016 Black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.7 Leather standard sample colors shall be FSS-X-00017 Dark red, FSS-X-00018 Light blue, FSS-X-00019 Dark blue, FSS-X00020 Green, FSS-X-00021 Brown, FSS-X-00022 Saddle, FSS-X-00023 Dark beige, FSS-X-00024 Black.

3.8 Vinyl standard sample colors shall be FSS-V-04009 Dark red, FSS-V-04010 Light blue, FSS-V-04011 Dark blue, FSS-V-04012 Green, FSS-V-04013 Brown, FSS-V-04014 Rust, FSS-V-04015 Dark beige, FSS-V-04016 Black.

3.9 Identification marking. Each item shall be permanently and legibly marked with contrasting ink, or with a white Tyvec (or equal) label, sewn on four sides, in an inconspicuous place with the contractor's name/trademark, contract number, national stock number, month and year of manufacture, and specification number.

3.10 Workmanship. A high degree of craftsmanship shall be exercised in order to produce chairs suitable for use in executive offices. The methods of construction, assembly, upholstering, finishing and the appearance of the chairs shall be in strict accordance with the requirements of this specification. Chairs shall have a neatly tailored, taut, stuffed appearance complying with applicable figures. Loosely fitted upholstery or uneven padding is not acceptable. Rotary mechanisms shall operate and rotate freely and easily without turning the base and be free from excessive play or wobble. Casters shall rotate smoothly and be attached to prevent accidental removal. All moving parts shall operate smoothly and quietly. All wood surfaces not covered with upholstery materials, shall be finish sanded smooth and all corners and edges eased, thoroughly cleaned, and finished. The natural grain of the wood shall not be clouded by the finishing materials. Bleaching agents or materials shall not be used. The application of materials, drying time, sanding, cleaning, and rubbing shall be controlled to produce items of smooth, uniform exposed surfaces without blisters, pits, wrinkles, runs, tackiness or more than a trace of orange peel.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. Unless otherwise specified in the contract or specification, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.2 First article approval. The requirement for first article approval and the responsibility (Government and contractor) for first article testing shall be as specified in the contract. The sample for first article approval test shall consist of one of each item awarded. Each item shall be examined and tested as specified herein for all the requirements of this purchase description. The samples shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

First Article samples shall also be compared to the bid sample chair(s) to ensure they have the same comfort (3.4.1) and comply with the materials and components list supplied with bid samples. Chairs for which bid samples were not submitted shall have similar comfort. Materials and components of the same quality must be used in the other chairs for which bid samples were not required. Approved first article samples shall serve as a manufacturing standard during the contract and shall be maintained until the last order is shipped, delivered and accepted.

4.2.1 Contractor testing. When the contractor is responsible for conducting first article approval test, the sample shall be inspected by the contractor for all the requirements of the contract. A record of this inspection and test, including certificates of conformance for materials, shall be submitted to the government for approval. The Government reserves the right to witness the contractor's inspection and test.

4.3 Inspection provisions.

4.3.1 Workmanship and dimensional examination. Perform examination in accordance with MIL-STD-105 and the following minimum sampling plans.

Workmanship (3.10): Defects per hundred unite (dhu)
Inspection Level - II. Acceptable Quality Level (AQL) - 4.0 dhu.

Dimensions: Percent defective
Inspection Level - S-2. Acceptable Quality Level (AQL) - 6.5%

4.3.1.1 Overall examination. In addition to visual and dimensional examination inspect each chair at a viewing distance of 6 feet for the following defects. Reject the item if one or more of the following defects is found.

Wood finish streaked, not uniform.

Piece visually off level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Scratch or bruise marks on wood.

Poor fit of upholstery as evidenced by wrinkles (other than comfort type in seat) at sides and corners or other defects.

Welts not straight.

4.3.2 Packaging, packing, marking examination. Examine items for compliance with requirements stated in this document and the contract. Perform examination on a percent defective basis in accordance with MIL-STD-105 and the following minimum sampling plan.

Inspection Level S-4. Acceptable Quality Level (AQL) - 4.0%

4.4 Testing. Failure to comply wtih the following test requirements will be cause for rejection. Testing is required for first article inspection. Test results shall be not more than one year old at time of First Article Inspection. Subsequent shipments during the contract period are not required to be tested, however the component supplier must certify that these shipments will meet all applicable test requirements.

4.4.1 Test for adhesives.

Test for adhesives

Component	Characteristic	Requirement reference	Test Method
Adhesive	Block shear test	3.1.3	ASTM D 905

Rerun test if all three of the following criteria are met: the average shear strength of all samples is below 2,800 p.s.i.; there is a 10 percent or greater difference between high and low specimen values, and at least one test specimen broke at more than 2,800 p.s.i.

Disregard a test specimen in computing the average if it breaks at less than 2,800 p.s.i.; and it has 50 percent or more wood failure.

4.4.2 Finish test and requirements. The following tests (except UV test) shall be performed on a sample panel finished in the same manner as chairs are finished in production.

Perform all finish tests at first article inspection and again one year after the start of the schedule contract period. Perform test (d) once a month during the contract period. All test panels shall be produced from finish materials currently being used in production. All samples tested shall meet the following test requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

(a) Cold check. Age panel one week. Follow ASTM D 1211 test procedure. After exposure of 10 cycles, there shall be no checking or cracking. True film checking is one or more wavy or stright lines which cross the grain and not appear related to grain structure. When a panel displays veneer checks, check runnit parallel to the grain, or glue line fracture, the panel shall be disregareded and another panel tested.

(b) Cold print. Age panel 48 hours. A 2 x 2-inch (approx.) piece of duck material (canvas) 8.25 ounces per square yard, minimum count of 60 x 58 yarns per inch, shall be placed on the panel. Place a one-pound weight on the material for 24 hours at 75 degrees F. Bottom (contact surface) of the weight shall be flat and have a 1.128" diameter (1 in 2). After the weight is removed, light polishing with a soft cloth and liquid polish must remove any imprint.

(c) Ultra violet light resistance. Spray one-half of a 6" x 9" white porcelain panel with two coats of the lacquer to be tested. Allow panel to air dry for at least 18 hours. Place panel 12" from a carbon arc lamp enclosed by a Corex D glass globe, and expose for 24 hours. After exposure, spray the other half of the panel in the same manner and allow to dry for at least 4 hours. Compare the two finishes. There shall be no more than a slight darkening of the arc lamp exposed film when checked under cool white flourscent light.

(d) Toughness and adhesion. Perform test for toughness and adhesion on a sample panel finished in the same manner as the furniture using Organic Coating Adhesion Tester, Model No, 1001 in accordance with manufacturer's instructions. Mar the panel both parallel and perpendicular to the grain. Film must conform to resulting indentation. Whitening (film separation) or cracking is not acceptable.

Organic Coating Adhesion Tester Model No. 1001 is available from U.S. Testing Company, Inc. Instrument Marking Division, 1415 Park Avenue, Hoboken, NJ 07030.

4.4.3 Test method for determining weight of material per square area. 5041 of Fed. Test Method Std. 191 or ASTM D-3776. See test requirements in 3.2.4, 3.2.5, 3.2.6, 3.2.7, 3.2.10.

4.4.4 Test method for determining breaking strength of twine. 4100 of Fed. Test Method Std. 191 or ASTM D-1233 or ASTM D-2256. See test requirements in 3.2.8.

4.4.5 Test method for determining breaking strength of webbing. 5100 of Fed. Test Method Std. 191 or ASTM D-1682 (grab method). See test requirements in 3.2.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.4.6 Test method for determining recovery ratio of polyurethane foam. ASTM D-3770, Recovery ratio. Use this test method for both conventional and high resilience type foam. See test requirement in 3.2.12.

4.4.7 Leather test methods. Sampling procedures and location from which the sample unit is to be obtained shall be in accordance with FED-STD-311. All tests are to be performed on individual sample units, with the exception of pH which is to be run on a composite. All test reports shall contain individual values utilized in expressing the final result. The lot shall be rejected if any one of the following conditions exists:

a. More than 25% of thickness measurement taken do not fall within the required range;

b. More than three test failures occur for breaking force, elognation, or stitch tear;

c. More than one test failure occurs for the remaining requirements applicable to the sample unit;

d. Any composite fails to meet the specific requirement.

Test	Method	Requirement
Thickness	Fed. Std. 311 1011.1	See 3.2.2
Breaking force (grab method)	Fed. Std. 311 2031	See 3.2.2
Elongation	Fed. Std. 311 2031 at 100 lb load	See 3.2.2
Stitch tear (double hole)	Fed. Std. 311 2151	See 3.2.2
Crocking (colorfastness, resistance to rubbing) Test all colors.	Fed. Std. 311 3031.1	See 3.2.2
Blocking	Fed. Std. 311 3121.1	See 3.2.2
pH	Fed. Std. 311 6621.1	See 3.2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Test	Method	Requirement
Fade resistance (colorfastness) Test all colors	Fed. Std. 191 5660.2 72 hour exposure	See 3.2.2
Abrasion resistance	ASTM D 3884 1000 cycles using CS-10 wheels and 1000 gram weights	See 3.2.2
Flexibility	ASTM D 2097 60,000 cycles	See 3.2.2

4.5 Tests for chairs. Test at least one chair of each type and style in accordance with ANSI X5.1-1985 General Purpose Office Chairs - Tests at time of First Article Inspection. Retest chairs from production, every six months during the contract period (6 mo., 12 mo., 18 mo.) Manufacturer must certify that all of his production will meet these test requirements.

Test Schedule

Section	Type I		Type II,		Type III	Type V
	Style A Style C	Style B	Style A Type IV Styles A, B	Style B		
5			*	*		
6					*	*
7	*	*				
8			*		*	*
9	*	*	*	*	*	*
10			*	*	*	*
11			*	*		
12	*	*	*	*	*	*
13	*	*	*		*	*
14	*		*	*	*	
15	*		*	*	*	
16			*	*		
17	*	*			*	*
18			*		*	*
19	*	*				
20	*	*				

5. PACKAGING, PACKING, MARKING

Package, pack and mark shipping containers in accordance with the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The executive office type chairs in traditional styling were designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. The chairs should compliment the traditional decor of executive areas when used with other furniture items within the group.


6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.


(b) Type, style, and class (see 1.2.1 and 3.4).

(c) Upholstery color required (see 3.6, 3.7 and 3.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

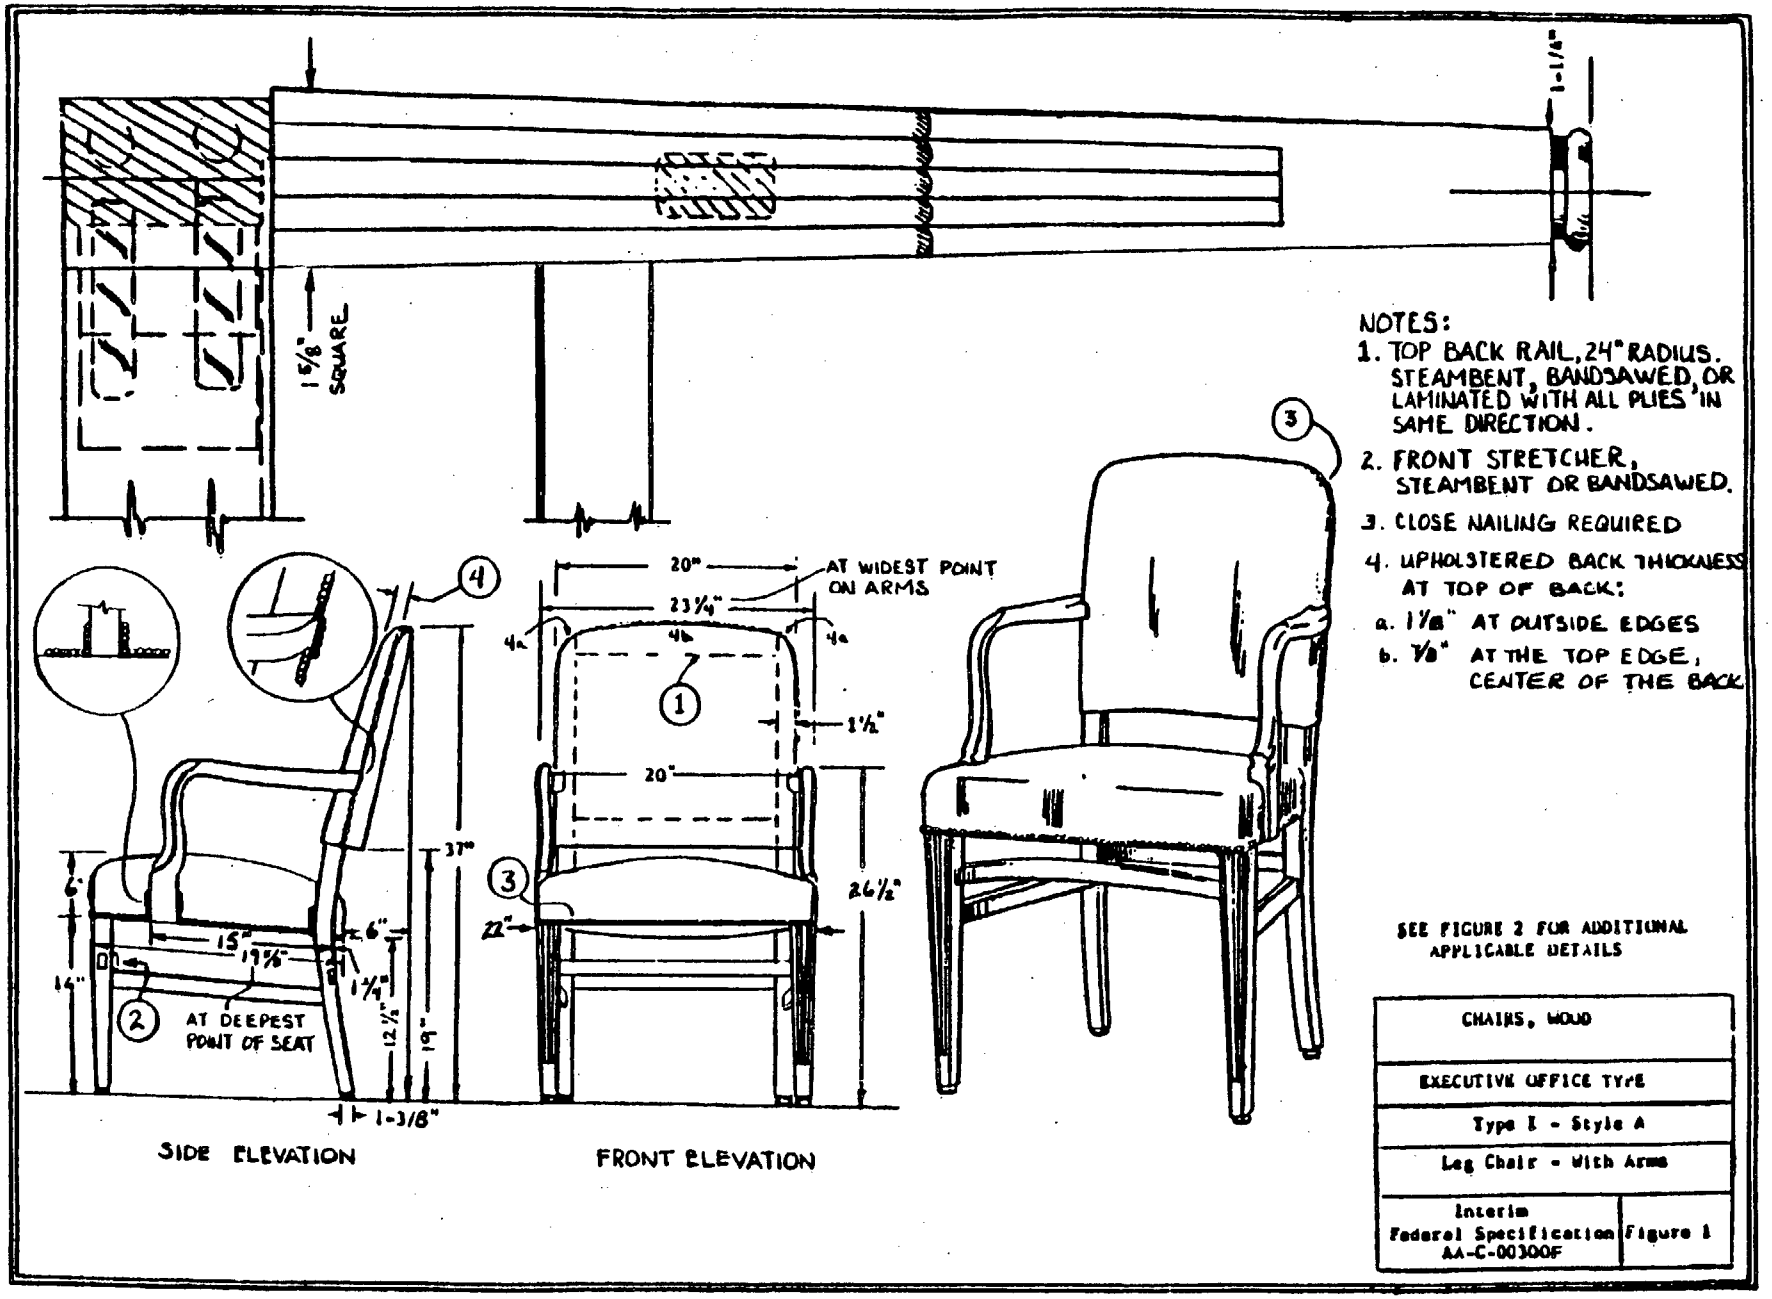

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

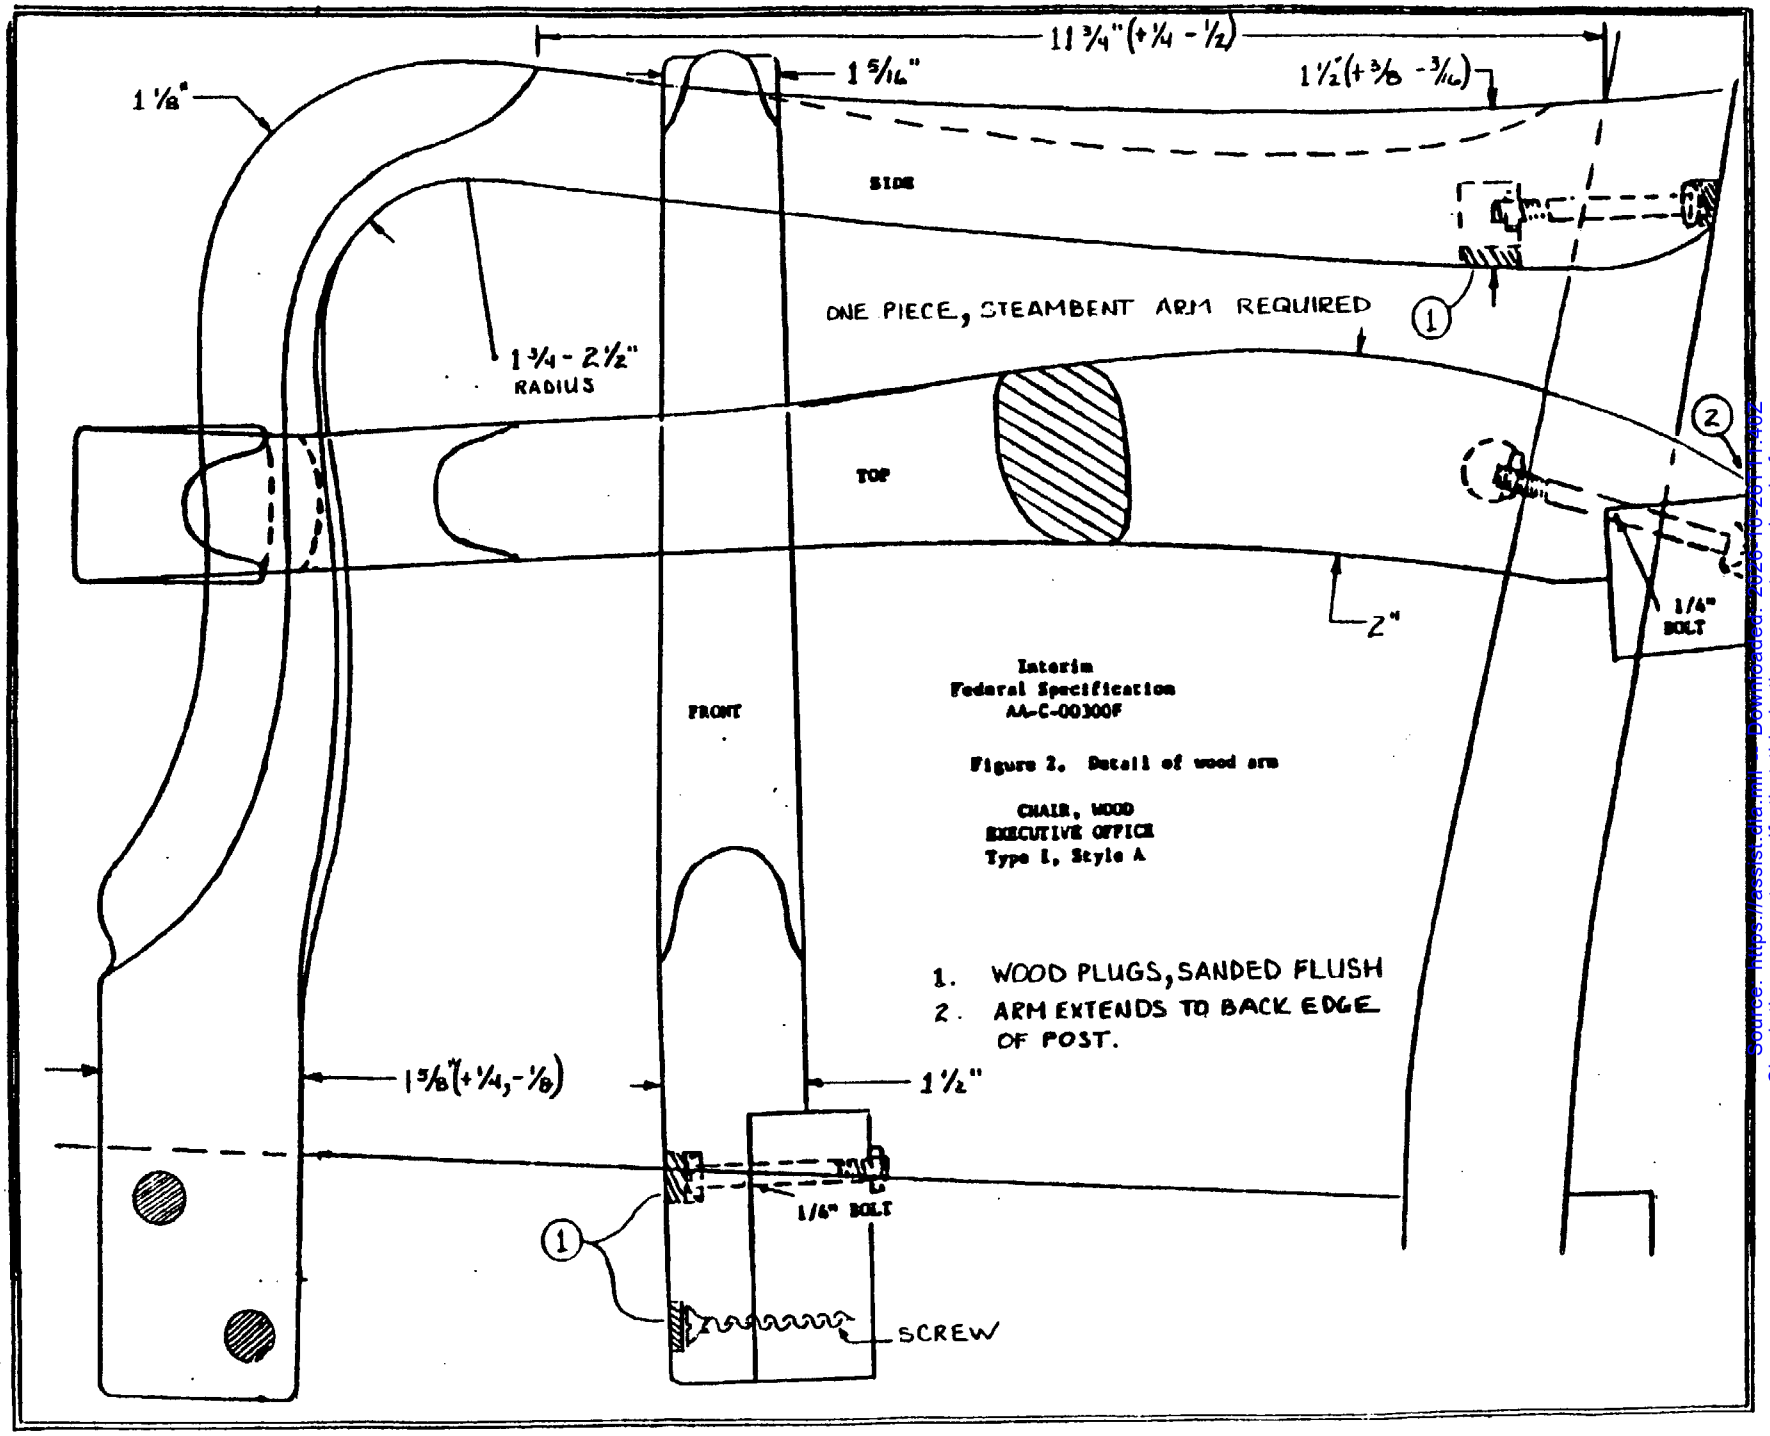


Interim
Federal Specification
AA-C-00300F

Figure 2. Detail of wood arm

CHAIR, WOOD
EXECUTIVE OFFICE
Type I, Style A

1. WOOD PLUGS, SANDED FLUSH
2. ARM EXTENDS TO BACK EDGE OF POST.


Source: https://assist.dla.mil - Downloaded: 2026-10-20T11:43Z
Check the source to verify that this is the current version before use.

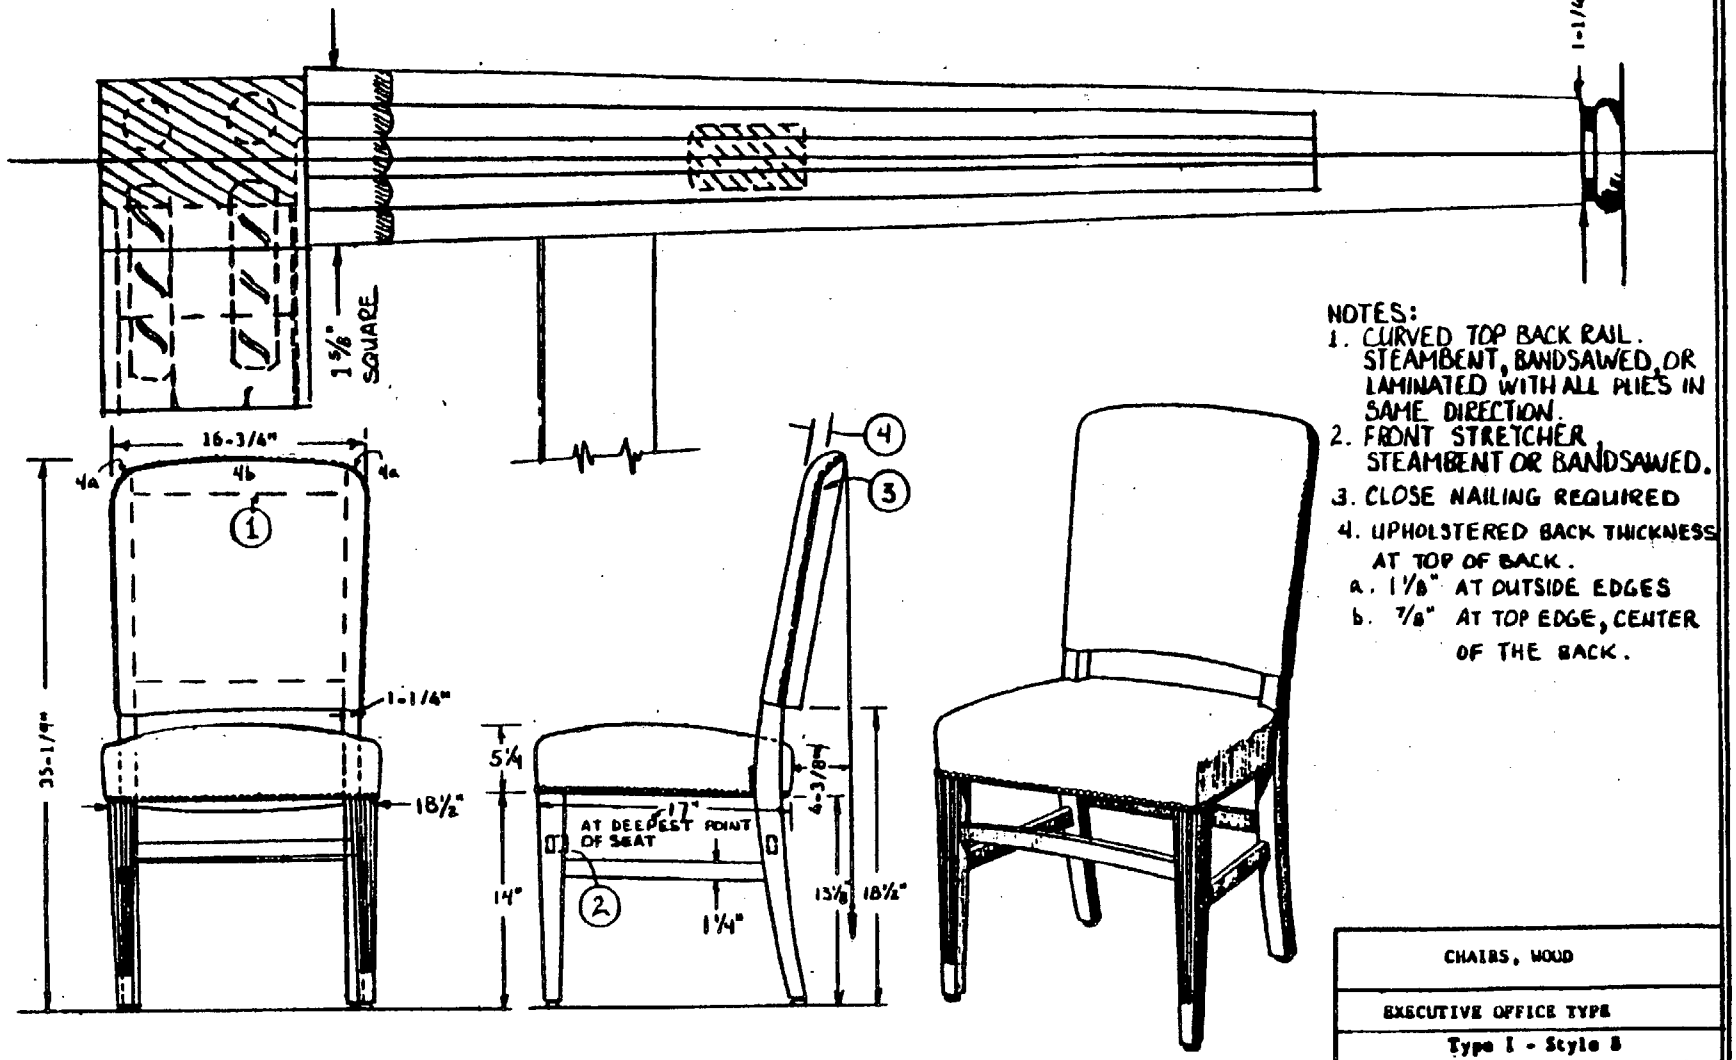

NOTES:
1. CURVED TOP BACK RAIL. STEAMBENT, BANDSAWED, OR LAMINATED WITH ALL PLIES IN SAME DIRECTION.
2. FRONT STRETCHER STEAMBENT OR BANDSAWED.
3. CLOSE NAILING REQUIRED
4. UPHOLSTERED BACK THICKNESS AT TOP OF BACK.
   a. 1⅛" AT OUTSIDE EDGES
   b. ⅞" AT TOP EDGE, CENTER OF THE BACK.

CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type I - Style 8	
Leg Chair - Without Arms Spring Seat	
Interim Federal Specification AA-C-00300F	Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

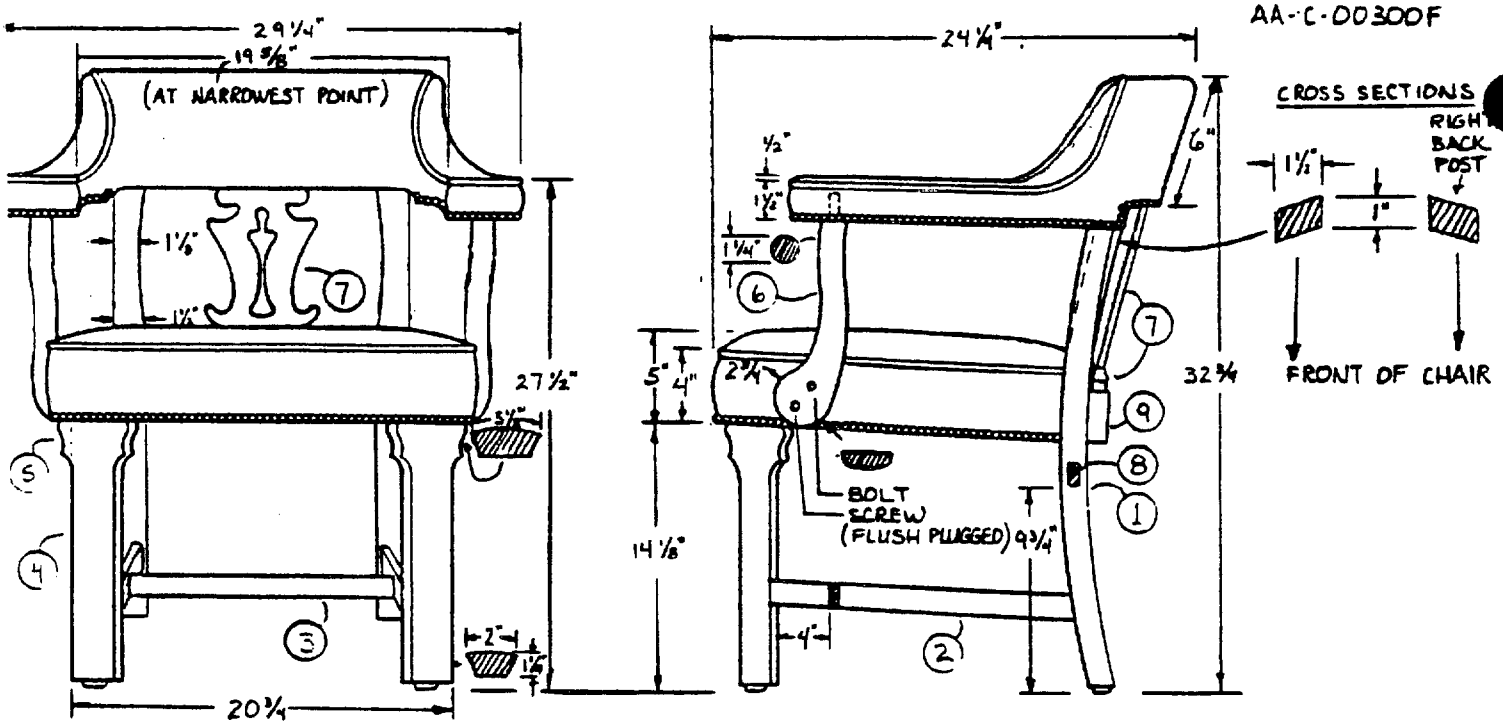

NOTES:

1. BACK POST 2 X 2¼"W. RADIUS EXPOSED EDGES
2. SIDE STRETCHERS 11/16 X 1 5/16"W. MIN. 1/16" RADIUS ON ALL EDGES.
3. CROSS STRETCHER 11/16 X 1¼ W. MIN. 1/16" RADIUS ON ALL EDGES.
4. FRONT LEG 1½ X 2¼ W. RADIUS EXPOSED EDGES.
5. LEG BLOCKS 1½ X 3⅛ L, CUT TO SHAPE
6. ARM STUMP 1½ THICK, MOULDED TO SHAPE
7. BACK BANISTER AND BANISTER BLOCK (SEE FIGURE 5 DETAIL)
8. BACK CROSS STRETCHER 13/4 X ¾. MIN. 1/16" RADIUS ON ALL EDGES.
9. EXPOSED BACK RAIL 16 to 17"R, 2⅜W X 1¼ THICK.

SEAT CUSHIONING:

1. SPRING SYSTEM (3.2.13)
2. EDGE ROLL, REQ'D 4 SIDES
3. WIRE REINFORCED SHEET FABRIC 3.2.10
4. ANY COMBINATION OF FOAM 3.2.12 AND BATTING (3.2.5, 3.2.6, 3.2.7) TO ACHIEVE REQUIRED COMFORT, FIRMNESS, AND APPEARANCE.
5. COVER WITH SPECIFIED UPHOLSTERY MATERIAL (3.4) IN ACCORDANCE WITH (3.4.6).


BACK & ARM CUSHIONING:


1. ANY COMBINATION OF FOAM (3.2.12) AND BATTING, APPLIED TO ACHIEVE REQUIRED COMFORT, AND APPEARANCE.

TYPE I, STYLE 3
FIDDLE BACK CHAIR WITH ARMS

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

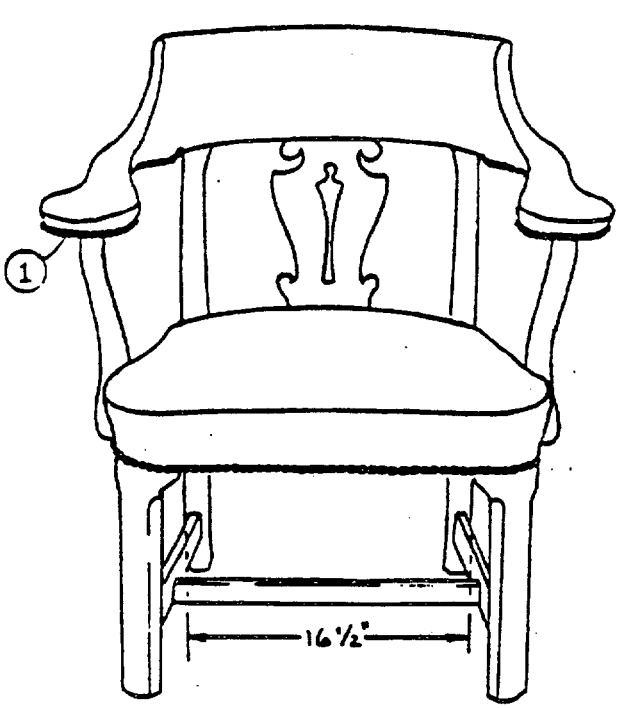

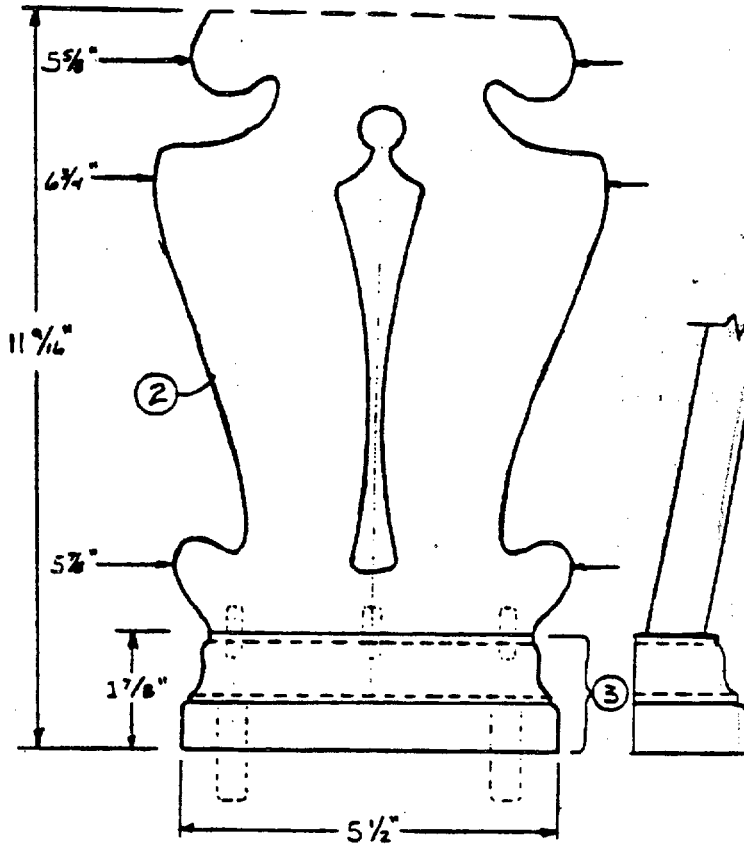

NOTES:

1. CLOSE NAILING REQUIRED WHERE SHOWN
2. BANISTER ½" THICK SOLID WOOD OR UNI-DIRECTIONAL LAMINATED (ALL PLIES SAME SPECIES).
3. BANISTER BLOCK, 2"W. SHAPE IS TYPICAL FOUR SIDES.

TYPE I, STYLE 3


FIDDLE BACK CHAIR WITH ARMS

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


NOTES:

1. TOP BACK RAIL, 24" RADIUS STEAMBENT, BANDSAWED OR LAMINATED WITH ALL PLIES IN SAME DIRECTION.
2. CLOSE NAILING REQUIRED AS SHOWN.
3. CHAIR BASE HEIGHT MAY VARY TO PROVIDE THE REQUIRED FINAL CHAIR HEIGHT.

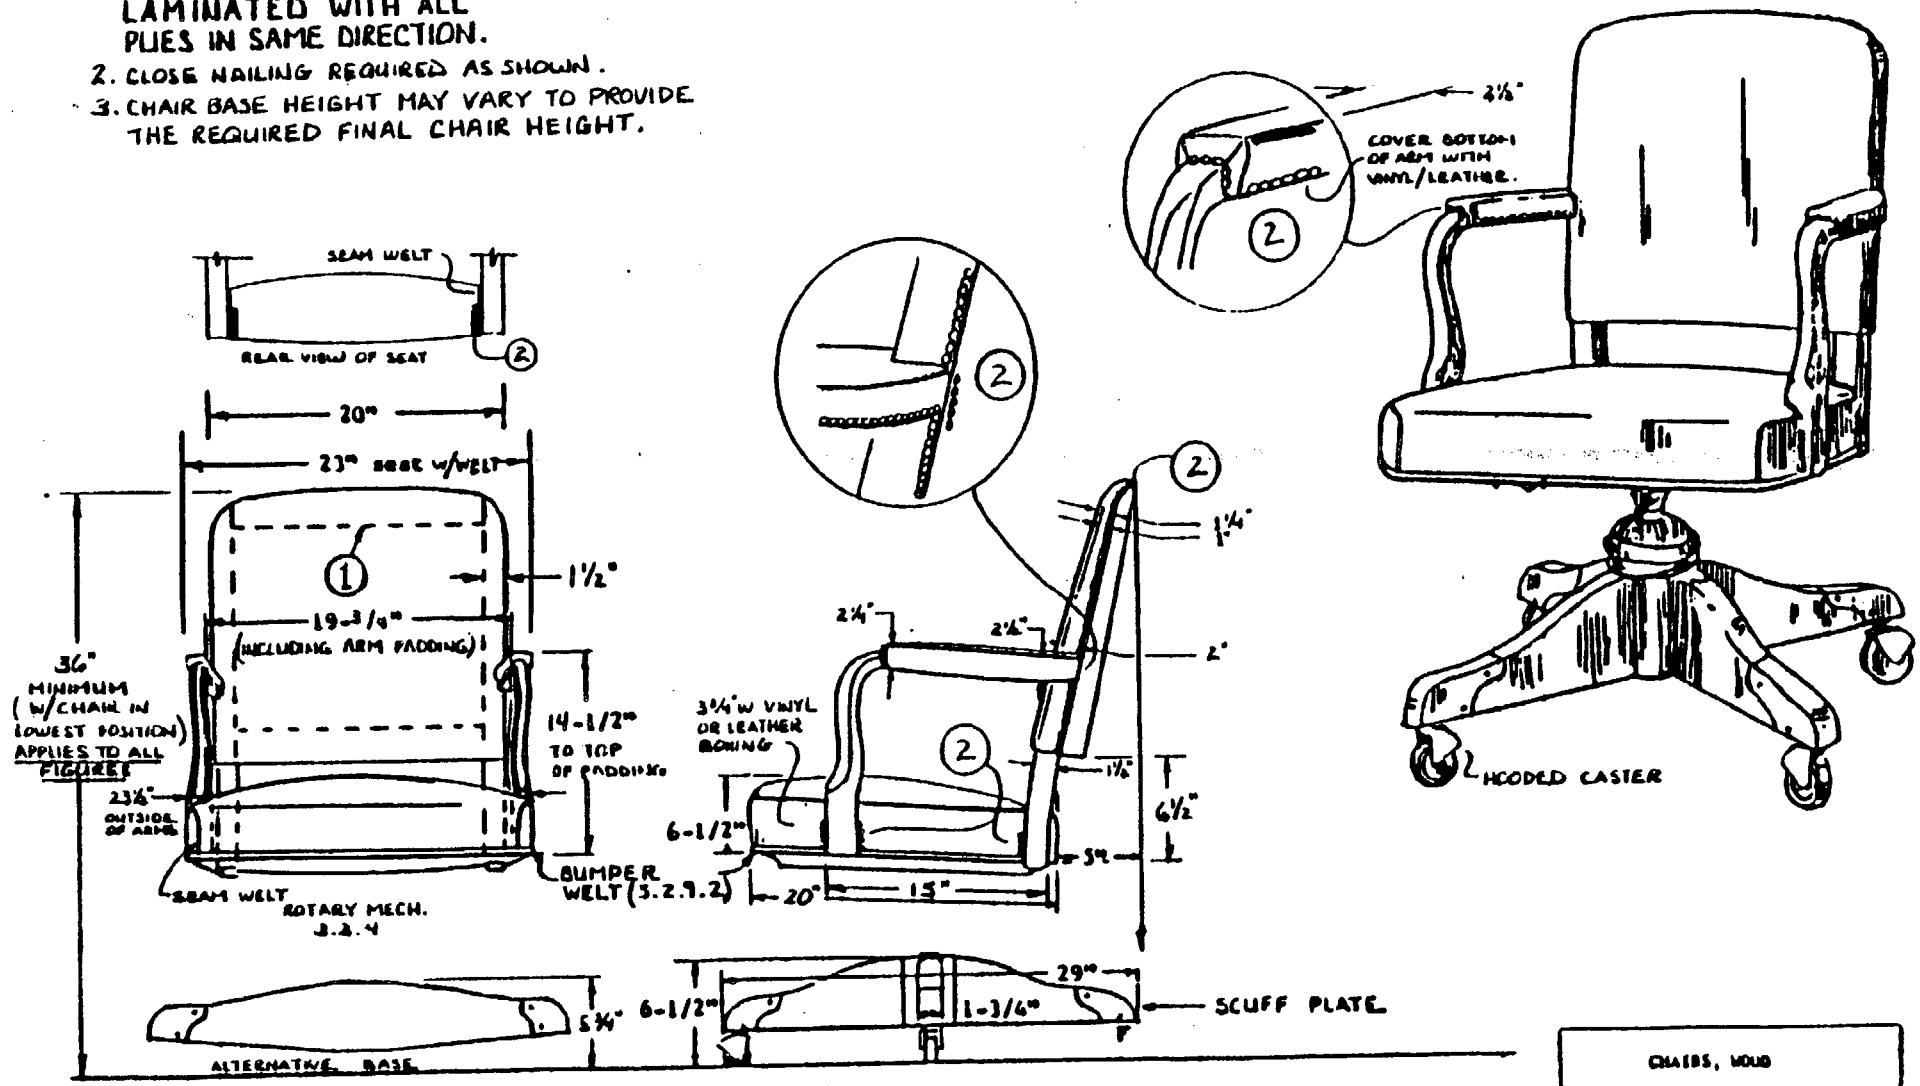

CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type 15 - Rotary Chair With Arms - Full Tilting	
Interim Federal Specification AA-C-00100F	Figure 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

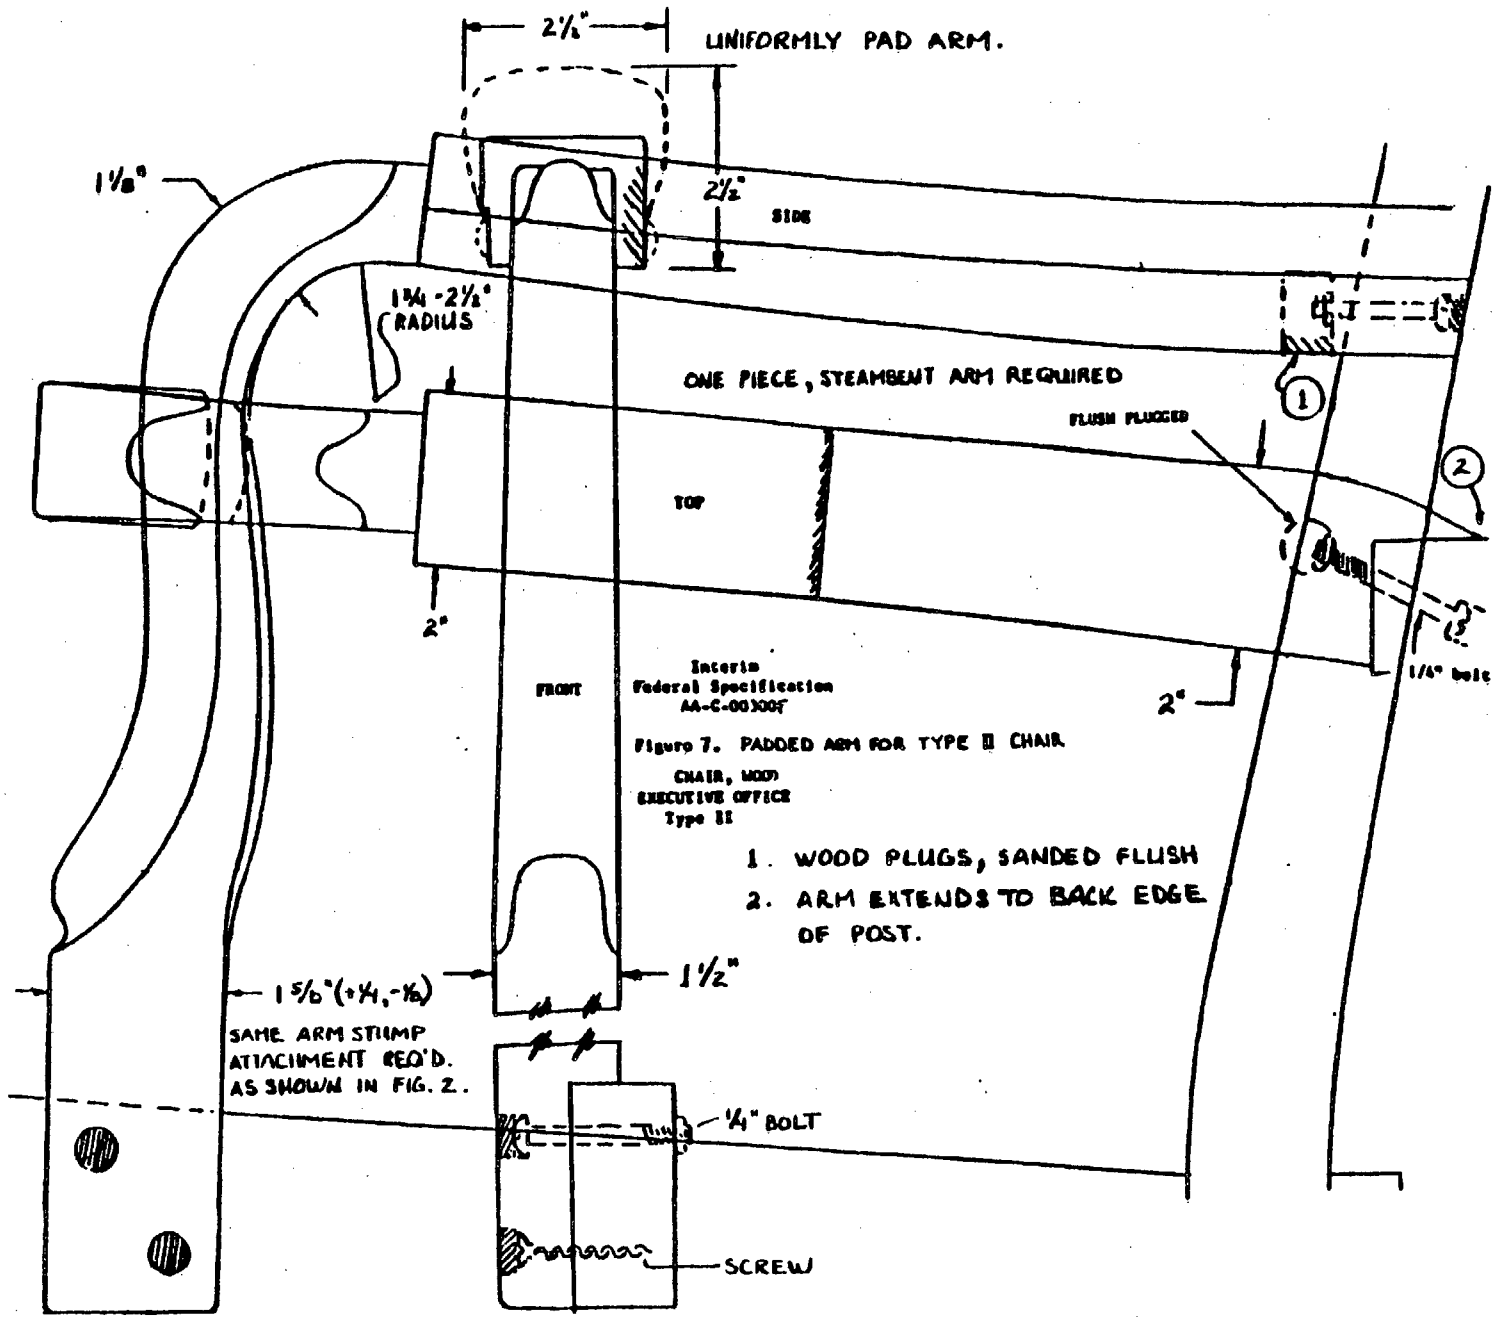

Interim
Federal Specification
AA-C-00300

Figure 7. PADDED ARM FOR TYPE II CHAIR


CHAIR, WOOD
EXECUTIVE OFFICE
Type II


1. WOOD PLUGS, SANDED FLUSH
2. ARM EXTENDS TO BACK EDGE OF POST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


NOTES: SECURELY GLUE ALL THE FOLLOWING JOINTS.


1. OVAL STUMP CROSS SECTION IS REQUIRED.
   A ROUNDED SQUARE CROSS SECTION IS NOT ACCEPTABLE.
2. ARM-STUMP JOINTS.
   JOIN WITH CHUCK TENON ON STUMPS. GLUE AND PIN (NOT PIN NAIL) OR GLUE AND SCREW JOINT IN ARM.
   OR
   MIN. 5/8 X 2½ DOWELS BLIND WEDGED INTO STUMPS. PIN (NOT PIN NAIL) OR SCREW JOINT IN ARM
3. SECURELY GLUE H.W. WEDGES TO FRONT AND REAR OF ARM TO PREVENT SAG IN ARM PADDING.
4. RABBET BOTTOM OF ARMS FOR BUMPER WELT.
5. 7 TO 10 NEATLY FOLDED UPHOLSTERY PLEATS REQUIRED ON FRONT AND BACK EDGES OF ARMS.

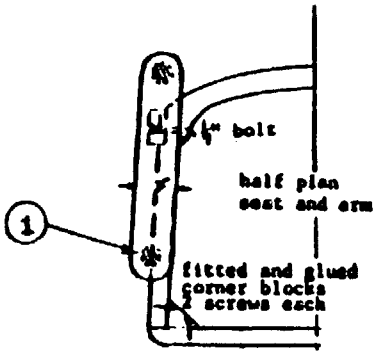


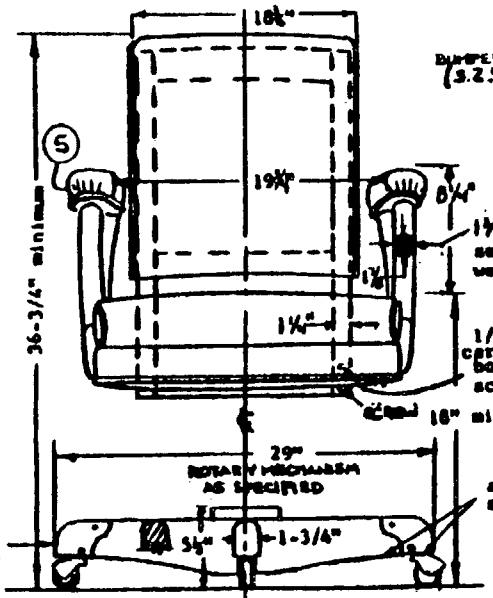

FRONT ELEVATION

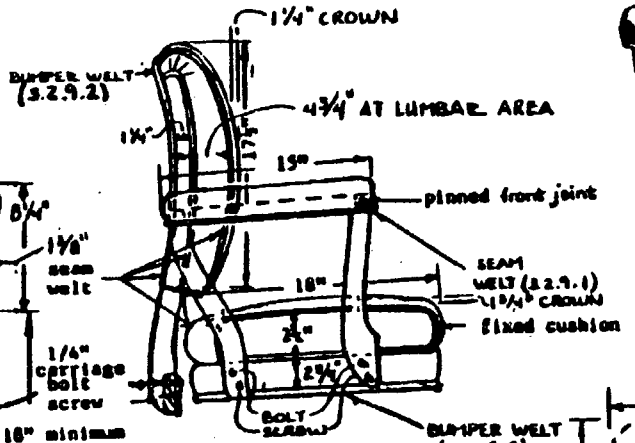

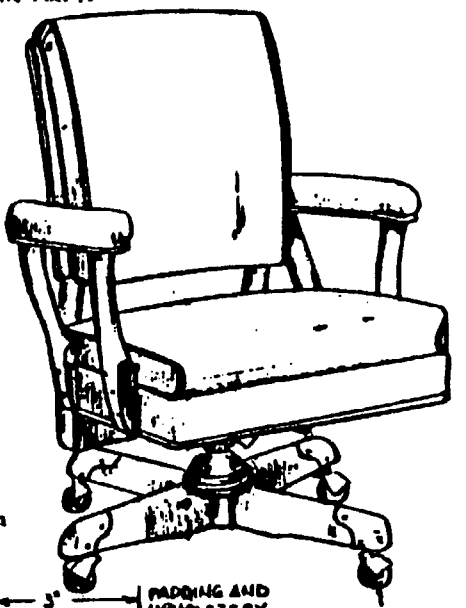


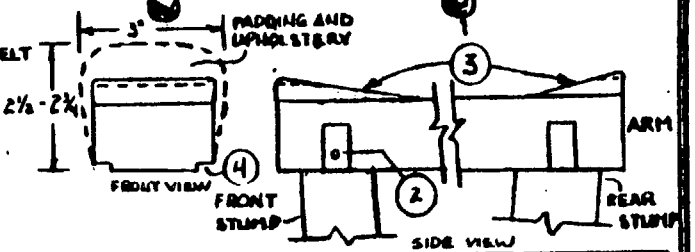

SIDE ELEVATION


NOTES: (CONT'D)

6. CLOSE NAILING REQUIRED ON THREE EDGES.
7. THE ALTERNATIVE CHAIR BASE DESIGN SHOWN IN FIG. 6 MAY BE USED IN LIEU OF THE ONE SHOWN ABOVE PROVIDED THE FINAL CHAIR HEIGHT REMAINS THE SAME.
8. TOP HORIZONTAL LINE OF CLOSE NAILING MAY CURVE DIFFERENTLY TO ACCOMODATE OTHER SPECIFIED CHAIRS SUCH AS TYPE IV STYLE B (JUDGES).




CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type III - Posture Chair Mantilcing Seat, Tilting Back	
Interim Federal Specification AA-C-00300F	Figure 8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

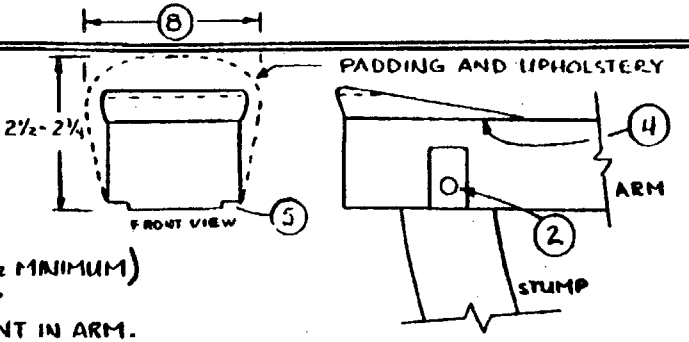

NOTES: SECURELY GLUE ALL THE FOLLOWING JOINTS.


1. ROUND OR OVAL STUMP CROSS SECTION IS REQUIRED. (1½ X 1½ MINIMUM) A ROUNDED SQUARE CROSS SECTION IS NOT ACCEPTABLE.
2. ARM - STUMP JOINTS.
   JOIN WITH CHUCK TENON ON STUMPS. PIN (NOT PIN NAIL) JOINT IN ARM.
   OR
   MIN. ⅝" X 2½" DOWELS BLIND WEDGED INTO STUMPS. PIN (NOT PIN NAIL) JOINT IN ARM. (A SCREW IS PERMITTED IN LIEU OF REQUIRED PIN.)
3. COPE AND SECURELY GLUE AND SCREW ARM TO BACK.
4. SECURELY GLUE A HARDWOOD WEDGE TO FRONT EDGE OF ARM TO PREVENT SAG IN ARM PADDING.
5. RABBET BOTTOM OF ARMS FOR BUMPER WELT.
6. 7 TO 10 NEATLY FOLDED UPHOLSTERY PLEATS ARE REQUIRED ON FRONT EDGE OF ARM.
7. OUTSIDE BACK - CLOSE NAILED ON THREE EDGES AS SHOWN IN FIGURE A.
8. 3½ INCHES WIDE (UPHOLSTERED WIDTH) AT THE FRONT, TAPERING TO 2½" WIDE NEAR WHERE ARM JOINS BACK.

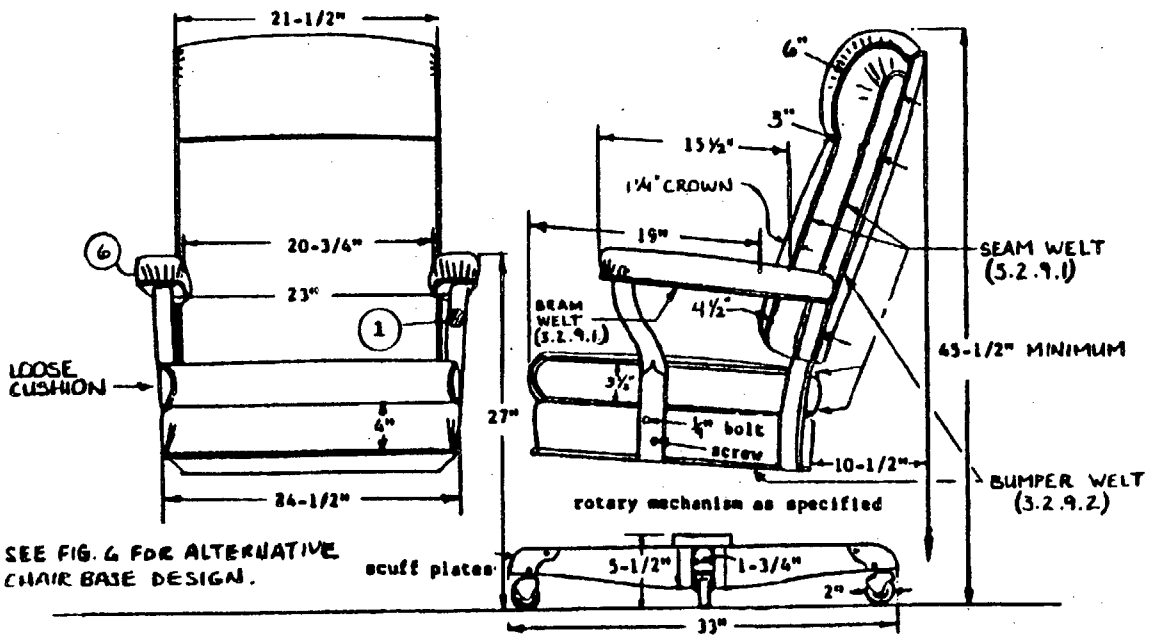


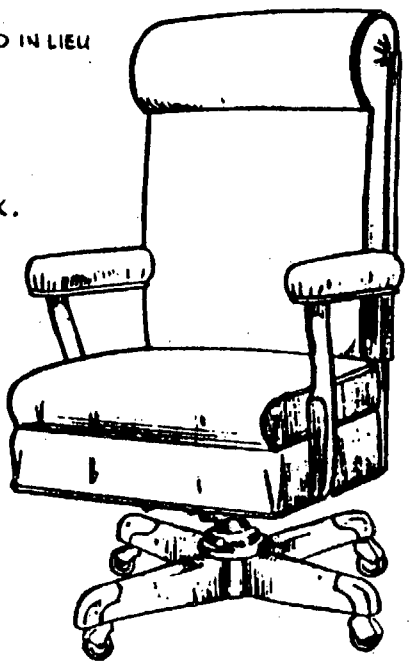

CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type IV - Style A (Judges) Full Tilting	
Interim Federal Specification AA-C-00300F	Figure 9


Source: https://assist.dla.mil -- Downloaded: 2023-10-23T14:19Z
Check the source to verify that this is the current version before use.




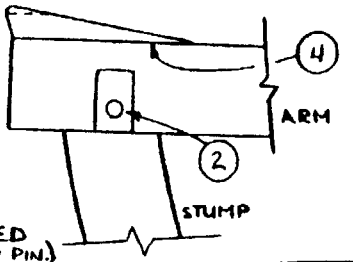

NOTES:


1. ROUND OR OVAL STUMP CROSS SECTION IS REQUIRED. (1½ X 1⅛ MINIMUM) A ROUNDED SQUARE CROSS SECTION IS NOT ACCEPTABLE.
2. ARM - STUMP JOINTS.
   JOIN WITH CHUCK TENON ON STUMPS. GLUE AND PIN (NOT PIN NAIL) JOINT IN ARM. (A SCREW IS PERMITTED IN LIEU OF REQUIRED PIN.)
   OR
   MIN. ⅝" X 2½" DOWELS BLIND WEDGED AND GLUED INTO STUMPS. GLUE AND PIN (NOT PIN NAIL) JOINT IN ARM.
3. COPE, GLUE AND SCREW ARM TO BACK.
4. GLUE A H.W. WEDGE TO FRONT EDGE OF ARM TO PREVENT SAG IN ARM PADDING.
5. RABBET BOTTOM OF ARMS FOR BUMPER WELT.
6. 7 TO 10 NEATLY FOLDED UPHOLSTERY PLEATS ARE REQUIRED ON FRONT EDGE OF ARM.
7. OUTSIDE BACK - CLOSE NAILED ON THREE EDGES AS SHOWN IN FIGURE 8.
8. 3½" W (UPHOLSTERED WIDTH) AT THE FRONT, TAPERING TO 2½" W NEAR WHERE ARM JOINS BACK.

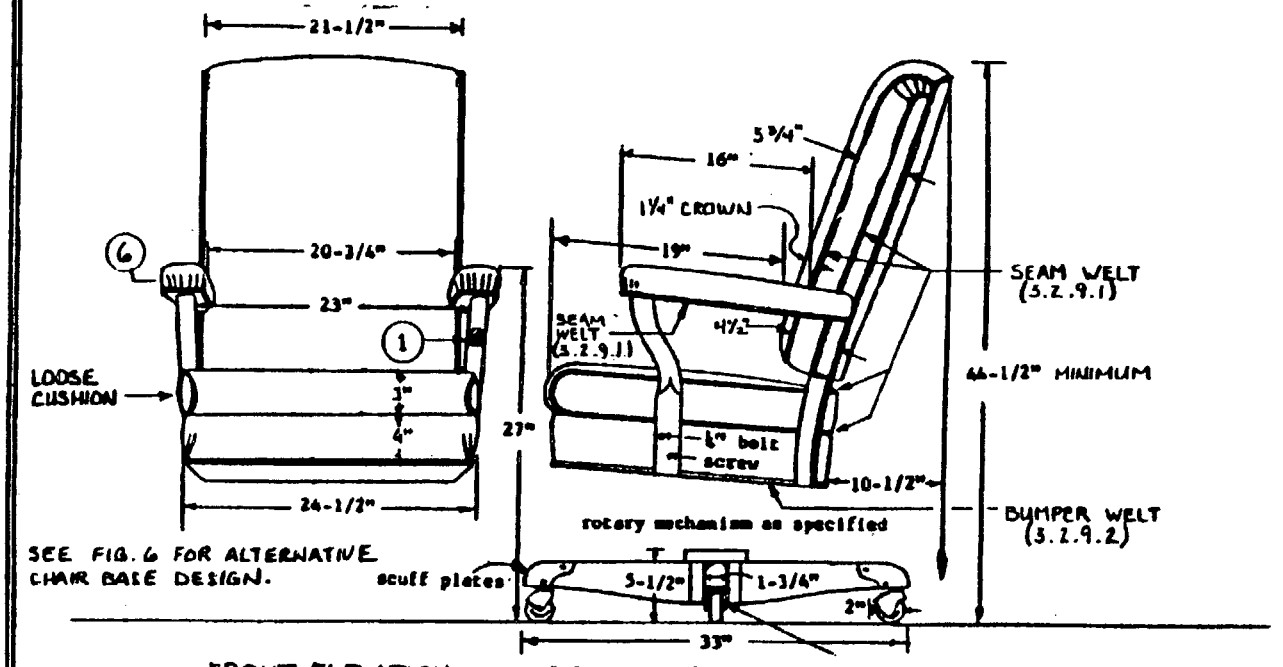


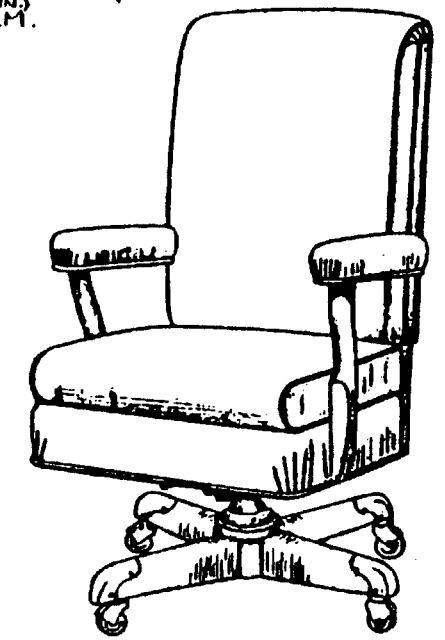

CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type IV - Style B (Judges) Full Tilting	
Interim Federal Specification AA-C-00300F	Figure 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

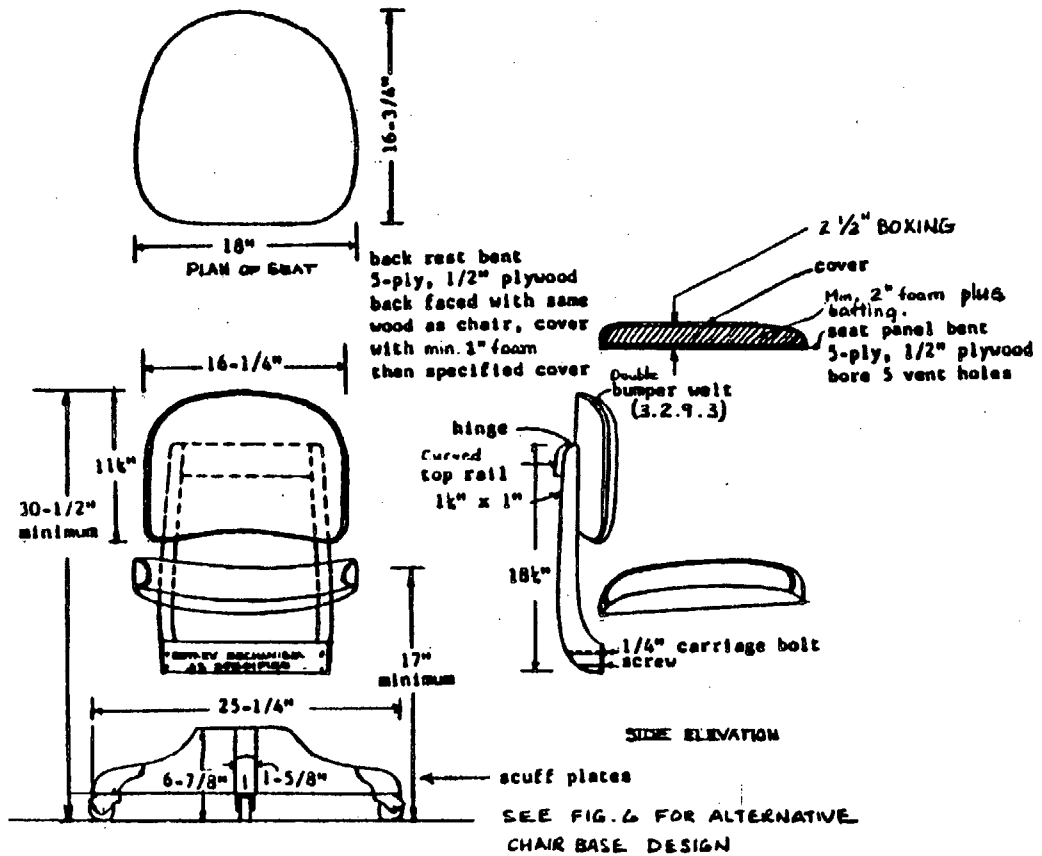

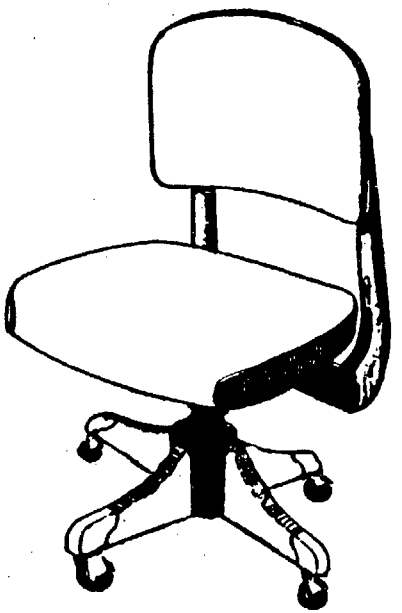

CHAIRS, WOOD	
EXECUTIVE OFFICE TYPE	
Type V Chair (Secretarial) Nontilting Seat - Tilting Back	
Interim Federal Specification AA-C-00300	Figure 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.