AA-F-00352B(GSA-FSS)
July 8, 1969
SUPERSEDING
Int. Fed. Spec. AA-F-00352a(GSA-FSS)
March 16, 1962

INTERIM FEDERAL SPECIFICATION

FILING CABINETS, STEEL, CARD SIZE, VERTICAL

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers vertical cabinets which are designed to hold index cards of the sizes specified herein. (see 6.1).

1.2 Classification. The card filing cabinets shall be of the following types and sizes as specified (see 6.2).

Type I - Ten drawer card file, (20 compartments), for cards 5 inches wide by 3 inches high.
Type II - Eight drawer card file, (16 compartments), for cards 6 inches wide by 4 inches high.
Type III - Seven drawer card file, (14 compartments), for cards 8 inches wide by 5 inches high.

Size 1 - 51 inches high by 27 inches deep (minimum dimensions), by width as required to conform to 3.3.5 herein.

Size 2 - 51 inches high by 25 inches deep (minimum dimensions), by width as required to conform to 3.3.5 herein.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-P-416 - Plating, Cadmium (Electrodeposited).
QQ-R-571 - Rods, Welding, Copper and Nickel Alloys.
QQ-Z-325 - Zinc Coating, Electrodeposited, requirements for.
TT-C-490 - Cleaning Method and Pretreatment of Ferrous Surfaces for Organic Coatings.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-C-650 - Crates, Wood, Open and Covered.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 183 - Identification of Pressed Bends, Forms, Seams and Joints (Sheet Metal).
Fed. Std. No. 595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

FSC 711C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case and Sheet, Overwrap, Water-Vaperproof or Waterproof, Flexible.
MIL-W-12332 - Welding, Resistance, Spot, Seam and Projection; for fabricating Assemblies of Low Carbon Steel.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Steel Products Manual:

(Copies may be obtained from American Iron and Steel Institute, 150 East 42nd. Street, New York, N. Y., 10017.)

National Classification Board:

National Motor Freight Classification Rules.

(Application for copies should be addressed to National Classification Board, 1616 P St., N.W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification Rules.

(Application for copies should be addressed to Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Preproduction Sample. Unless otherwise specified (see 6.2) before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from complying with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel sheets used in the fabrication of the cabinets shall be commercial quality, cold rolled or cold rolled oiled, either of which shall have a stretcher leveled standard of flatness; hot rolled pickled and oiled; or hot rolled annealed. "Commercial quality" and "stretcher level standard of flatness" shall be as defined in the Steel Products Manual. Cold rolled steel shall be used for cabinet sides, back, top, and outside drawer fronts; and may be used throughout. When cold rolled steel is not used throughout, hot rolled pickled and oiled steel shall be used for heavy interior structural parts and hot rolled annealed steel shall be used for drawer back, bottom, sides, interior drawer fronts, compressor and cabinet bottom. The thickness of steel to be used for individual parts shall be as given in table II and in the applicable paragraphs of this specification and are the minimum (thicknesses) permitted, except the decimal equivalents shown for gages are subject to the tolerances given in the Steel Products Manual. The steel shall be smooth, free of rust, loose scale, pits, scratches, laps, crimps and buckles. The sheet steel used for parts to be formed shall withstand the bend test specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Thickness of steel for individual parts

Part	Gage	Decimal Equivalent (inches)
Cabinet case:		
Back, lapped seam or one piece	20	0.0359
Back, locked seam	22	0.0299
Bottom	18	0.0478
Sides	20	0.0359
Top	18	0.0478
Cross rails, formed	18	0.0478
Cross rails, flat	--	0.125 (minimum)
Interior reinforcing members:		
Front vertical	16	0.0598
Center vertical (not required on size 2)	18	0.0478
Rear vertical	16	0.0598
Horizontal (all)	18	0.0478
Drawer:		
Outside front	20	0.0359
Inside front	24	0.0239
Bottom and sides	22	0.0299
Back	18	0.0498
Partitions (as specified in 3.3.8.4)		
Suspension (as specified in 3.3.8.6.1 and 3.3.8.6.2)		
Compressor:		
Face	20	0.0359
Other compressor parts, no embossing in addition to other formations	14	0.0747
Other compressor parts, embossed in addition to other formations	20	0.0359

3.2.2 Hardware.

3.2.2.1 Face hardware. Except as specified herein, the face hardware shall be satin finished anodized aluminum; type 430 corrosion resistant steel; or satin finished chromium plated on die cast zinc, brass or bronze. The tensile strength of die cast zinc shall be not less than 40,000 psi. The exposed surfaces of all hardware used on a single unit shall be finished to match each other within the limits of the base metal and protective plating used. All exposed surfaces of the face hardware shall be free of sharp edges, burrs, pits and nicks or scratches that penetrate the protective plating or anodizing.

3.2.2.1.1 Drawer pulls. The drawer pulls shall be of one of the materials and finishes specified in 3.2.2.1. Their design and dimensions shall be as shown in figure 2. The ends shall terminate in uninterrupted 1/4-20 threads. Stamped pulls will not be permitted. All surfaces and edges shall be smooth and shall be free of roughness and sharpness. Pulls shall be securely attached by means of solid nuts and lockwashers. All threads of the nuts shall engage the threaded ends of the pull. No part of the attachment shall project beyond the inside drawer front.

3.2.2.1.2 Label holders. The label holders shall be of one of the materials and finishes specified in 3.2.2.1. They may be sand cast, die cast or stamped and formed. All surfaces shall be smooth and shall be free of roughness and sharp edges. Cast label holders shall have threaded studs and shall be attached by solid nuts and lockwashers or by sheet spring nuts. Alternatively, plain studs are acceptable if attached by sheet spring nuts. Stamped and formed label holders shall be 20 gage (0.0359 inch) steel or not less than 0.040 inch thick aluminum, and shall be attached by integral lugs which pass through accurately positioned slots in the drawer front and which hold the label holders securely to the drawer front and prevent movement. The stamped and formed label holder shall have a minimum of three lugs, positioned on sides and bottom. The slots in the drawer front shall not be visible after the label holder is installed. Any fastenings used shall not penetrate the inside drawer front and shall not be visible from the cabinet exterior. The outer edges of the label holder shall form an unbroken line and the side and bottom edges shall lie flat against the face of the drawer. The label holder shall accommodate, without binding, label cards that are not less than 2-3/4 inches wide by 1-3/4 inches high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.2.1.3 Locks. When specified (see 6.2) the cabinet shall be equipped with an automatic unit lock. The locking mechanism shall be controlled by a lock keyed for paracentric keys, which shall have not less than four pin tumblers and not less than 200 key changes. The face of the lock shall be of one of the materials specified in 3.2.2.1 or, alternatively, shall be dull nickel plated finish on die-cast zinc. The face of the lock shall extend beyond the outer surface of the cabinet top not less than 1/16 inch nor more than 1/8 inch when in the locked position. The locking mechanism shall be secured to the inside of the cabinet in a manner that will retain the lock in the prescribed position and provide ease of operation of lock and locking mechanism. Two keys shall be supplied with each lock. The locking mechanism shall be so constructed that drawers left open when cabinet is locked may be closed and positively locked without distorting the locking mechanism. The locking mechanism shall hold the drawer positively locked against forward tilting of the cabinet or raising and lowering the drawer front.

3.2.2.1.4 Drawer latch. Each drawer shall have an automatic latch which is released by a finger controlled mechanism. It shall automatically hold the drawer in a closed position. The latch shall prevent the drawer from opening, even when the loaded cabinet is in a forward tilted position unless the latch is released by the finger control. The latching mechanism, except for the hook, shall be concelaed between the drawer fronts. The catch may be formed from the drawer suspension members, or the front interior vertical reinforcing members, in a way that positively and automatically engages the hook, and in a manner that prevents shearing, tearing, or deforming of the catch by the hook. The finger control shall be a button or lever and shall be located so that it can be released when the user's hand is in position on the drawer pull. The button or lever shall be of one of the materials specified in 3.2.2.1.

3.2.2.2 Fastening devices. Bolts, nuts, screws and similar fastening devices shall be made to resist rust by electro-galvanizing or by zinc, chromium or cadmium plating in accordance with the manufacturer's commercial practice.

3.2.3 Finishing materials.

3.2.3.1 Primer. The primer, when used, shall be compatible with the finishing enamel used.

3.2.3.2 Enamel. Enamel for the finishing shall be the baking type and shall be the manufacturer's commercial product except the color shall be as specified in 3.2.3.2.1. The enamel shall pass the tests in 4.5.4.

3.2.3.2.1 Color of finish. The color of the finishing enamel shall be gray, color chip No. 26134 of Fed. Std. No. 595 (see 6.4).

3.3 Construction

3.3.1 Appearance. The general appearance of the cabinets shall be as shown in figure 1 which illustrates a typical design of each type covered by this specification.

3.3.2 Welding and brazing. (See definitions in 6.5.)

3.3.2.1 Spot welding. Spot welds shall not be closer to the edge of either adjoining member than one-half the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.5.3. All depressed or protruding spot welds on cabinet exterior shall be filled and sanded or ground smooth. Unless otherwise specified, spot welds shall be centered not more than six inches apart.

3.3.2.2 Brazing. When brazing is used in lieu of welding, (where permitted), the brazing method shall include the use of a nickel bronze rod conforming to Type I, Class RCuZn-D of QQ-R-571 having a minimum tensile strength of 70,000 p.s.i.

3.3.3 Sheet metal formation. All bends, seams and joints of sheet metal specified herein shall conform to the illustrated nomenclature in Fed. Std. No. 187.

3.3.4 Assembly. Assembly methods and procedures shall provide rigid cabinets that have sufficient strength to withstand the tests specified in 4.5.1 and as well as to prohibit the loosening of any part. Neither shall the assembly cause any other defect which might adversely affect the lifetime serviceability of cabinets or drawers. Welded and mechanical joints shall be secure, rigid and properly aligned. Welding and brazing shall be sound and without porosity. Brazing will be acceptable only when expressly required or permitted herein, except it may be used to fill depressed spot welds on cabinet exterior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

applicable sections of ASTM Method D1364-71.

3.3.5 Dimensions.

3.3.5.1 Overall height and depth. The minimum overall height and overall depth of the cabinets shall be 51 inches by 27 inches respectively or 51 inches by 25 inches respectively depending on the size specified (see 1.2). The maximum overall height of both size 1 and size 2 cabinets shall be 52-5/8 inches. The overall depth dimensions shall be exclusive of hardware and of the 1/8 inch maximum overhang of front of top permitted in 3.3.6.2.

3.3.5.2 Minimum inside clear drawer compartment dimensions.

3.3.5.2.1 Widths. The minimum inside clear drawer compartment widths shall be the width of the index cards the cabinets are designed to accommodate, plus 1/8 inch.

3.3.5.2.2 Heights. The minimum inside clear drawer compartment heights shall be the height of the index cards the cabinets are designed to accommodate plus 1/2 inch as measured from the clear drawer bottom to the bottom of clear drawer opening for the full width and depth of the drawer.

3.3.5.2.3 Depths. The minimum inside clear drawer compartment depths shall be 24-1/2 inches for the size 1 cabinet and 22-1/2 inches for the size 2 cabinet. The measurement shall be taken from the inside drawer front to the front of the compressor in its most rearward position.

3.3.6 Cabinet case. The cabinet case shall be of the quality of steel specified in 3.2.1 and shall be of the applicable minimum thicknesses specified in table I. The case shall consist of a front, back, bottom, sides and top. The bends and formations of metal specified are the minimum bends or folds permitted. Bends or folds in additional to those specified are acceptable.

3.3.6.1 Front. The front edges of the side panels shall be formed inward in a closed square bead or a return flange to form the vertical edges of the cabinet front. The front face of the vertical edges shall be at least 1/2 inch wide. There shall be at least three cross rails of 1/8-inch thick round edge strip steel or 18 gage steel between drawers. If 1/8-inch thick steel is used the rear edge shall be formed at an angle of not less than 30 degrees or alternatively, shall have a rib or bead formation extending at least two-thirds of the length of the cross rail. When 18 gage steel is used, both the front edge and the rear edge of the cross rail shall be formed in a return flange. Either style of cross rail shall have a finished width of at least 1-3/4 inches. The cross rails shall be secured to the interior vertical reinforcing members by gussets or braces which may be an integral part of the cross rail. Separate gussets or braces shall be secured to the cross rails by spot or fusion welding. The gussets or braces shall be secured to the front interior reinforcing member by spot or fusion welding or a combination of both. The gussets or braces shall not project into the clear drawer opening. The cross rails shall inset the front face of the cabinet case not more than 1/16 inch.

3.3.6.2 Top. The side and back edges of the top shall be formed to have one ninety degree flange or to have a return flange, depending on the formation of the top edge of the cabinet sides and back. There shall be no seams along the upper surface of the top. The back edge may overlap the cabinet back. The front edge shall be formed in a return flange, (regardless of the formation of the side and back edges), which may extend beyond the face of the cabinet by not more than 1/8 inch. The two front corners shall be neatly closed and then brazed or fusion welded, and ground smooth along the seam where the flanges meet.

3.3.6.3 Sides and back. The sides and back shall be joined by spot welding of lap seams and fusion welding or spot welding of lock seams. Fusion welding shall be spaced a minimum of four equidistant places along the seam and the weld shall be not less than 3/8 inch in length. Seams shall be at the back of the cabinet. There shall be no sharp edges along the exterior of the seams. Sides and back may be of one piece construction provided a 20 gage (0.0359 inch) steel reinforcing angle is welded to the inside of the back near each corner. These reinforcements shall extend the height of the cabinet, within the limits that cabinet construction permits. When the side and back edges of the cabinet top are formed to have one 90 degree flange, the top edge of the cabinet sides shall be formed to provide a flush condition between sides and top. When the cabinet top is formed with a return flange on the side and back edges, the top edges of the cabinet sides and back shall have not less than a 90 degree flange formation to which the top shall be securely welded. When this construction is used there shall be a flush condition between sides and top and back and top. When the bottom panel is pan shaped and welded to the cabinet sides and back with the flanges extending downward (inverted pan) the bottoms of the sides and back shall be formed in a return flange. When the inverted pan has additional return flanges at the sides and back, forming a base for the cabinet to rest on, no formation at the bottom of the sides and back is necessary. When the bottom panel is not pan shaped, the bottom of the side panels shall have a flange formation the full width of the panel. The bottom of the back panel shall also be flanged to provide a base for the cabinet to rest on when the back of the bottom plate is not formed to provide the base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.6.4 Bottom. The bottom shall be constructed of either one or two pieces. When of one piece, the front of the bottom panel shall be formed upward in a return flange formation. The two piece bottom shall consist of a bottom panel and an 18 gage (0.0478 inch) front base section joined by spot welding a mallerated joint. The front base section shall be a return flange formation. In either kind of construction, the bottom shall be reinforced at the front with a cross member formed with a minimum of three bends. It shall extend under and abut the return flanges and shall be welded to the bottom and be joined to the front interior vertical reinforcing members by means of gussets, brackets, fusion or spot welding or a combination thereof. The edge of the return flange on the bottom panel or front base section, as applicable, shall be tack welded or tack brazed to the reinforcement member at four places. Each tack weld or tack braze shall be not less than 1/2 inch long. The ends of the return flange of the bottom panel or front base section shall be joined to the vertical edges of the cabinet front by welding or brazing. The height of the vertical flange at the front of the one piece bottom panel or the height of the front base section, as applicable, shall be the maximum that is practical within the limits of the height requirements of 3.3.5.1 and 3.3.5.2.2. In all bottom constructions, except when bottom is pan shaped and welded to case with flanges extending downward, the bottom panel shall have a blister in each corner which is not less than 3/32 inch in height and not less than 1/2 inch in diameter. The cabinet bottom shall be securely welded to the cabinet sides and back.

3.3.7 Interior vertical reinforcing members. Size 1 cabinets shall have vertical reinforcements at the front, center and rear of each side and the Size 2 cabinets shall have vertical reinforcements at the front and rear of each side. The front reinforcing member shall be formed with no fewer than five bends. An offset formation shall be counted as 2 bends. The center and back reinforcing members shall have no fewer than two bends. The combined width of the three reinforcing members on each side of the Size 1 cabinet, after forming, shall be not less than 5-1/2 inches. The combined width of the front and rear reinforcing members on each side of the size 2 cabinet, after forming, shall be not less than 5 inches. The front reinforcing member shall abut the return flange of the front edge of the cabinet and shall provide a flush condition. The front and rear vertical reinforcing members shall extend from the inside of the cabinet bottom to the return flange on the face of the cabinet top (minimum) and if extended higher shall be at least 1/4 inch from the underside of the top (maximum). The vertical reinforcements shall be attached to the sides by spot welding.

3.3.8 Drawers. Type I cabinets shall have ten drawers, type II cabinets eight drawers and type III cabinets seven drawers. The drawer parts shall be constructed of the quality of steel specified in 3.2.1 and of the steel gages specified in table I. Each drawer shall be divided into two equal compartments extending front-to-back. Drawer fronts shall be flush with, or shall inset the vertical edges of the cabinet front not more than 1/8 inch. They shall be square with the sides and top of the cabinet. Each drawer shall be equipped with a pull as specified in 3.2.2.1.1, two label holders as specified in 3.2.2.1.2, a latch as specified in 3.2.2.1.4 and two compressors as specified in 3.3.8.5. Drawers shall operate on suspensions as specified in 3.3.8.6. Each drawer shall be provided with stops which will prevent the drawer from hitting the back of the cabinet on the inward movement and with positive stops which will prevent the drawer from falling out when fully extended. At full extension the face of the compressor in its most rearward position shall inset the vertical edges of the cabinet front by not more than 1/2 inch. The drawers shall be easily removable without the use of tools. The stops encountered on the inward movement shall be equipped with bumpers of rubber or other comparable material. The drawer assembly shall result in drawers which are properly aligned.

3.3.8.1 Drawer fronts. The drawer fronts shall be of double wall construction, with all edges of the outside front channeled. The widths of all of the channeled edges shall be equal. In addition, the channeled edges shall be flanged on the sides and bottom for welding to the drawer body by not less than two spot welds to each side and not less than four spot welds to the bottom (see Figure 3). The top channel of the outside drawer front shall receive the full height inside drawer front. The top corners of the outside front shall be neatly closed, brazed along the entire mitered seam and ground smooth. Bottom corners shall be neatly closed and free of burrs and sharp edges. The top of the inside drawer front shall be formed to inset the top formation of the outside drawer front in a flush condition. The sides and bottom of the inside drawer front shall be flanged. The drawer fronts shall be constructed so that no part of the drawer pull or pull attachments extend beyond the outside surface of the inside drawer fronts when assembled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.8.2 Drawer sides and bottom. The drawer sides and bottom shall be formed in one piece or three pieces. Three piece construction shall have a flange on the drawer sides, spot welded to the drawer bottom. The sides and bottom shall be formed to accommodate the kind of partitions specified in 3.3.8.4 and compressors specified in 3.3.8.5. The top of the drawer sides shall be either channel formed and flanged, rolled or beaded for maximum strength and to eliminate all rough, sharp or hazardous edges and corners.

3.3.8.3 Drawer back. The height of the drawer back shall be equal to the height of the drawer sides at the points where they join. A minus tolerance of 1/8 inch will be permitted. The drawer back shall be secured to the body by spot welding 90 degree flanges. If the drawers have bottom lock compressors there shall be two cut-outs in each back that will permit the compressor release lever to be conveniently grasped when the compressor is in its most rearward position. The top edges of the back shall be free of burrs, or sharp or rough edges.

3.3.8.4 Drawer partitions. Partitions in drawers shall be either formed by the drawer body, or the bottom shall be offset and a single wall partition of 18 gage (0.0479 inch) steel shall be used unless there is a channel formation in the drawer bottom to house a bottom lock compressor. In the latter case, the offset in the drawer bottom may be omitted and a 20 gage (0.0359 inch) center partition will be acceptable. The top edge of the single partition shall have a formation to eliminate sharp edges and the bottom edge shall be flanged and spot welded to the drawer bottom on not more than 4 inch centers. Any burrs, or sharp or rough edges that result from flanging and spot welding shall be eliminated. The ends shall be secured to the drawer front and back.

3.3.8.5 Compressors. Each compartment shall be provided with a sliding compressor of the quality of steel specified in 3.2.1 and of the steel gages specified in table I. It shall be the friction locking type, shall hold all cards firmly in position, shall be removable without special tools and shall be easily and readily adjustable for the full depth of the drawer. The unit shall withstand the test specified in 4.5.1.5 without damage or creeping of the compressor in excess of 1/4 inch. The compressor shall be capable of compressing three inches or cards, or less, when in its most forward position. It shall be centered in the compartment and shall have a minimum of side movement during its operation. Compressors shall be free of sharp corners, burrs, or rough or sharp edges.

3.3.8.6 Drawer suspension. The drawer suspension shall conform to the applicable tests specified in 4.5 and sub-paragraphs thereunder, and shall be equal in all respects to one of the types described in 3.3.8.6.1 and 3.3.8.6.2. In either type of suspension, the slides shall travel easily and smoothly; and shall not accidently disengage from other suspension members at any time. All rollers and ball bearings shall be lubricated with a lubricant indended for the purpose. Excess lubricant shall be wiped off.

3.3.8.6.1 Progressive suspension, side-arm type. The steel used in the construction of the neutral members shall be not less than 16 gage (0.0598 inch) and shall be cadmium plated in accordance with class 1, type I of QQ-P-416, or zinc plated in accordance with type I, class 2 of QQ-Z-325 except for areas burned during a welding process. Alternatively, black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller. Alternatively, each neutral member may operate on free solid rollers or solid balls. There shall be not less than five balls or rollers to each neutral member. If the design of the suspension is such that a separate housing is required for rollers or balls, the housing shall be not less than 16 gage (0.0598 inch) cold rolled steel, welded to the neutral member at each end by not less than two spot welds. Balls or rollers shall be incapable of dislocation or removal unless the suspension is dismantled.

3.3.8.6.2 Progressive suspension, cradle type. There shall be two neutral members and not less than two tie members, all of which shall be not less than 16 gage (0.0598 inch) steel. The neutral members and tie members shall be joined by not less than two spot welds at each connection. All members shall be cadmium or zinc plated as specified in 3.3.8.6.1, or the alternative permitted in 3.3.8.6.1 may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.8.6.3 Drawer and case tracks. The drawer and case tracks shall be hot or c steel, not less than 0.062 inch thick. When the suspension used is the side arm ty tracks shall have a channel formation along the top and bottom edges, and when the used is the cradle type, the case track shall have a channel formation along the to angle formation along the bottom edge. After forming to shape, the drawer and case have a Rockwell hardness of not less than 70 nor more than 85 on the "B" scale, or hardness on a comparable scale. All outer surfaces of the drawer and case tracks s in accordance with 3.2.3 and 3.4. The case tracks shall be secured to at least the rear interior vertical reinforcing members by inter-locking of lugs on the case tra appropriate openings in the interior vertical reinforcing members. The interlockin vide secure connections without vertical or horizontal movement. Alternatively, th may be welded or bolted to at least the front and rear interior vertical reinforcin provide a comparable connection. The drawer tracks shall have not less than one 90 and shall be attached to the drawer sides by spot welding. The drawer and case tra located in proper relation to each other and so that the drawers are even in the op

3.3.8.6.4 Rollers and ball bearings. Fixed journal ball bearing rollers shall turned from cold rolled steel rod, case hardened and shall be not less than 7/8 inc and not less than 1/4 inch thick, with both edges chamfered. Alternatively, fixed bearing rollers may be cold formed from cold rolled steel and case hardened. Cold shall be not less than 7/8 inch in diameter and not less than 1/4 inch wide axially rollers shall be of the unitary type, consisting of a one-piece outer and a one-pie with an smooth unbroken surface in the raceway, and a smooth unbroken surface on th with the edges of the outer race chamfered or formed with a radius, or a combinatio outer and inner races shall be concentric to within plus or minus 0.0025 inch, and rolling surface shall be parallel to the axis of the bearing to within plus or minu Solid steel balls shall be not less than 3/8 inch diameter, hardened and polished.

3.4 Pretreatment and finishing.

3.4.1 Pretreatment. All exterior and interior unplated metal surfaces shall be painting in accordance with any method of TT-C-490.

3.4.2 Priming. Unless type I or type II of TT-C-490 is used, all exterior and faces treated as specified in 3.4.1 shall be coated with primer specified in 3.2.3.1

3.4.3 Enameling. All primed surfaces shall be coated with enamel specified in baked in accordance with the enamel supplier's directions. Total dry film thickness and primer shall be not less than 1.4 mils on case front, top, sides and the drawer not less than 1.0 mil on all other interior and exterior surfaces. Primer may be or any surfaces prepared for painting in accordance with type I or type II of TT-C-490 dry enamel film thickness is not less than 1.0 mil on case front, top, sides and the and not less than 0.6 mil on all other interior and exterior surfaces. The finish s to produce smooth, uniform surfaces without runs, wrinkles, grit, areas of thin film and separation of color. Finish panels shall withstand the tests specified in 4.5.4

3.5 Identification marking. Unless otherwise specified, each cabinet shall be inconspicuously marked in a plain and legible manner with the specification number, Number, contract number, month and year of manufacture and the manufacturer's name so that the source of supply can be readily determined. When specified (see 6.2) id marking shall be in accordance with MIL-STD-130.

3.6 Workmanship. A high degree of craftsmanship shall be exercised while perfor various operations of manufacture to eliminate the possibility of personal injury du and sharp edges; to assure that the occurrence of defects will not exceed the accept level specified herein; and to produce a finished commodity that is satisfactory to in function, serviceability and appearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample (when required), shall be made on a completely fabricated item before regular production is started for all provisions of this specification applicable to end product examination and tests.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 except where otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards, or if none, in accordance with this specification.

4.3.2 End item inspection.

4.3.2.1 Visual examination. The cabinets shall be examined for the defects listed in table II. The inspection level and acceptable quality level shall be as specified in 4.4. The lot shall be all cabinets of the same type and size offered for inspection at one time. The lot size shall be expressed in units of cabinets for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely assembled cabinet.

TABLE II. Classification of end item defects

Examine	Defect	Classification Major	Classification Minor
Enamel finish	Poor adhesion, i.e. blistered, checked, peeling; not dry to touch, color separation, stain, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Thickness not as specified.		X
	Wrong color.		X
	Scratch through to base metal, bare spots, runs under coating.	X	
Metallic coating	Wrong type.		X
	Poor adhesion, i.e. blistered, peeling, flaky, stained or discolored.		X
Workmanship and construction (general)	Any part missing except bolts, nuts and lockwashers.	X	
	Malformed or mislocated parts affecting serviceability. Broken punctured or cracked parts. Sharp edge or projection that may cause injury.	X	
	Malformed, mislocated, damaged, buckled or warped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

"3.3.5 Upholstered Arms. The arms of the davenport and easy chair shall be upholstered as follows:

TABLE II. Classification of end item defects (con.)

Examine	Defect	Classification Major	Classification Minor
Workmanship and construction (general) (con't)	Incorrect formation of component.	X	
	Components not of gauge specified.	X	
Sheet metal formation	No formation when one is specified.	X	
	Not formation specified.		X
Bolts, nuts and lockwashers	Not metal plated; thread stripped on more than one bolt; more than one bolt, nut or lockwasher missing.	X	
	Threads stipped one bolt; one bolt, nut or lockwasher missing.		X
Welds	Missing, not required number or not sound (broken, cracked, burnt through, poor adhesion).	X	
	Not ground smooth, protrude, or pits not filled (exposed welds).		X
	Spot welds not spaced as specified.		X
Lock and latch	Lock wrong kind.		X
	After locking, drawers left open will not automatically engage mechanism.	X	
	Latch not concealed.		X
	Latch does not automatically hold drawer in closed position and does not prevent it from opening if loaded cabinet is tilted forward.	X	
Label holder and drawer pull	Not securely attached (moves when slight vertical or horizontal pressure is applied).		X
	Not secured as specified.		X
	Fastenings visible from cabinet exterior.		X
	Outer edges of label holder not straight or side and bottom edges do not lie flat against face of drawer.		X
	Label holder does not readily accommodate cards at least 2-3/4 inches wide by 1-3/4 inches high.		X
	Label card slips through.	X	
Cabinet case	Components, including reinforcing members, gussets and braces not joined by means specified.	X	
	Seam along top or sides of case.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of end item defects (con.)

Examine	Defect	Classification Major	Classification Minor
Cabinet case (con't)	No flush condition between sides and top or between sides and top and back and top, depending on sheet metal formation (see 3.3.6.3).		X
	Bottom reinforcement, i.e. cross member(s), not formed with minimum of three bends.		X
Drawer	Drawer front does not fit square in opening, affecting appearance.		X
	Stops do not prevent drawers from falling out when fully extended.	X	
	Tools needed for intentional removal of drawer.	X	
	Drawers do not open to the extent specified.	X	
	Drawer compressor not easily and readily adjustable for full depth of drawer; excessive side movement during its operation.		X
	Compressor will not compress three inches of cards, or less, at front of the drawer.		X
	Drawer suspension binds.	X	
	Drawer and case tracks not attached as specified.	X	
	Drawer and case tracks move when manual pressure is applied.	X	
	Balls or rollers on drawer suspension become dislocated when suspension operates, or they can be removed.	X	
Identification marking	Missing, not permanent, or is illegible, incomplete or incorrect.		X

4.3.2.2 Dimensional examination. Inspection will be made of cabinets for compliance with dimensions specified. Any dimension not within tolerance specified will be classified as a defect. The inspection level and acceptable quality level shall be as specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination will be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored in accordance with table III below. The sample unit shall be one shipping container. The lot size shall be the number of containers in the inspection lot. The inspection level and acceptable quality level shall be as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects

Examine	Defect
Marking	Incorrect, illegible, or improper size, location sequence, or method of application.
Material	Any nonconforming components, components missing damaged or otherwise affecting serviceability.
Workmanship	Inadequate application of components such as incomplete cushioning, inadequate securing of drawers.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection levels	AQL's Major	AQL's Total
Table II	II	4.0	10.0
4.3.2.2 (1 class)	S-2		4.0
Table III (1 class)	II		4.0

4.5 Tests.

4.5.1 Tests on end item. The tests specified in 4.5.1.1 through 4.5.1.5 shall be performed on completely assembled cabinets. Inspection level S-1 shall be used for selection of the number of cabinets to be tested from any lot. Tests shall be repeated whenever a change in made in material, design or method of production. The paragraphs referenced above specify test methods and equipment that may be used, but the use of other test fixtures is permissible if the mechanics of the system are duplicated for similar tests. Points of reference shall be provided, as applicable, so that accurate measurements may be taken to determine if any permanent distortion has taken place under test. Any failure of welds or mechanical joints or any permanent distortion in excess of that specified or any other damage to any part of the cabinet that would affect serviceability will be considered as failing to comply with the requirements of this specification. Failure to pass any test shall be cause for rejection of the lot represented by the sample cabinet under test.

4.5.1.1 Rack test. The filing cabinet shall be placed in a level position. Each drawer of the cabinet shall be loaded to capacity with index cards of the size the cabinets are designed to accommodate or their equivalent weight, which shall be distributed equally from front to back of drawers. Examinations and observations shall be made to determine, in addition to the defects described in 3.3.4, the impairment, if any, of the ease of the operation of the drawers, the locks if supplied, latches or other movable devices, under condition of loaded level uniform support. The drawer pull test as specified in 4.5.1.3 shall be conducted at this time. The drawer operating force shall not exceed 3-3/4 pounds or 6 pounds, as applicable. The loaded cabinet shall then be raised not less than one inch to a position of being supported at two diagonally opposite corners. The area of support shall not be greater than 6 inches from each corner. The loaded cabinet shall remain in this position for a minimum of 24 hours. The cabinet shall be returned to a level position and shall be reexamined to determine, in addition to the defects described in 3.3.4 the impairment, if any, of the ease of the operation of the drawers, the locks if supplied and locking mechanism, the latches, or other movable devices. The drawer pull test specified in 4.5.1.3 shall again be conducted. The cabinet shall be considered as having failed the test if the drawer operating force exceeds 3-3/4 pounds or 6 pounds, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.5.1.2 Drawer latch test. All cabinet drawers shall be loaded as specified in 4.5.1.1. The bottom of the cabinet shall be braced to prevent slipping during the test. The cabinet lock shall be in the unlocked position. The cabinet shall then be tilted forward no less than 30 degrees. The cabinet shall then be returned to the upright position. This operation shall be repeated no less than five times in a five minute period. The drawer latches must hold all the drawers in the closed position when cabinet is tilted forward. After the required tilting cycles are completed, all the drawer latch hooks and catches shall be examined for evidence of deformation. All drawer latches shall be operated by hand to assure they still function properly.

4.5.1.3 Service test. The filing cabinet shall be bolted or otherwise secured in proper position. The drawer selected for test shall be connected by the drawer pull to a machine which will operate the drawer. The machine shall have a positive means (no springs) for adjusting the length of its stroke so that the drawer will travel the full distance from back to front stop minus not more than 1/4 inch. The machine shall drive the drawer at a rate of twenty cycles per minute, plus or minus 2 cycles per minute. The mechanism shall in no way contribute to the support of the drawer. The drawer to be tested shall be loaded to capacity with index cards of the size the cabinet is designed to accommodate or their equivalent weight, which shall be distributed equally from front to back of drawer. The suspensions of the drawer being tested shall be cleaned and lubricated with SAE 30 weight machine oil at the end of 10,000 cycles and shall have no further attention until the test is completed. At the beginning of the test and at each increment of 10,000 cycles, a drawer pull test as specified in 4.5.1.4 shall be conducted to determine the force required to start the loaded drawer forward to move to its full outward limit. The drawer suspension shall be considered as having failed the service test if the drawer operating force exceeds 3-3/4 pounds or 6 pounds, as applicable, to complete the forward stroke before or at 75,000 cycles. Should failure be perceptible during the increments of 10,000 cycles, the machine shall be stopped and the drawer pull test specified in 4.5.1.4 shall be conducted at this point.

4.5.1.4 Drawer pull test. The drawer to be tested shall be loaded with index cards of the size the cabinet is designed to accommodate, or their equivalent weight, which shall be equally distributed from front to back of drawer. The test shall be conducted by passing a limp cord, attached to the center of the drawer pull, over a sheave with a weight applied to the free end. The force required to start the loaded drawer forward and to move it to its full outward limit shall be recorded. The drawer operating force shall not exceed 3-3/4 pounds, except when the drawer suspension assembly incorporates a feature which drops the drawer into place to facilitate closing of the drawer, the drawer operating force shall not exceed 6 pounds to bring the suspension out of the depression. At that point the drawer will be stopped and the operating force required to continue the drawer to full extension shall not exceed 3-3/4 pounds.

4.5.1.5 Static load test. Each drawer of the cabinet shall be loaded to capacity with index cards of the size the cabinet is designed to accommodate, or their equivalent weight which shall be distributed equally from front to back of drawer. The compressor in each drawer shall be drawn up tight. The cabinet shall be tipped over on its back on a furniture moving dolly and shall remain in that position for not less than three hours. The cabinet shall then be returned to an upright position. The cabinet shall then be examined for damage to the exterior, the drawer, latches, compressor, and lock if supplied, and for any displacement or damage to the drawer contents.

4.5.1.6 Compressor test. The drawer to be tested shall be loaded to not less than two-thirds of its capacity with index cards of the size the cabinet is designed to accommodate. The filing material shall be held against the front of the drawer by the face of the compressor. The location of the compressor shall then be marked or scratched on the bottom of the drawer. The apparatus specified in 4.5.1.3 for operating the drawer shall be connected to the drawer being tested and set in motion and made to operate 5,000 cycles. Upon completion of the 5,000 cycles the position of the compressor shall be indicated by a second mark or scratch on the bottom of the drawer. As a result of this test the rearward movement of the compressor shall not exceed 1/4 inch as indicated by the distance between the two marks or scratches.

4.5.2 Bend test for steel sheets. The steel sheets for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain without showing any cracks or fractures on the outside of the bend.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4.5.3 Spot welds. Spot welds shall meet the pull test of MIL-W-12332 and button diameter shall be as specified therein.

4.5.4 Finish tests. The finish tests shall be performed on 20 gage sample panels prepared in accordance with 3.4.

4.5.4.1 Flexibility. The dried film shall show no evidence of cracking or flaking under seven power magnification after a panel has been bent through 180 degrees over a 1/8 inch diameter rod.

4.5.4.2 Hardness. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across the film surface without evidence of marring when viewed at an oblique angle in a strong light.

4.5.4.3 Adhesion. The dried film shall not be removed from the panel when the latter has been scored with a razor blade through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares, and a one inch wide piece of cellophane tape is applied firmly to the grid surface and then quickly pulled from the surface.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Drawer latches and suspensions shall be lubricated with manufacturer's recommended lubricant. When locks are furnished, dry graphite shall be injected into the lock's mechanism, the drawer locked, the keys packaged in a cotton cloth drawstring bag and the bag secured to a drawer handle. Drawers without locks, shall have the drawers and slides immobilized by blocking with cushioning material (see figure 4). Finished surfaces of the cabinet shall be protected with a bag or shroud constructed of polyethylene material, minimum thickness of 1 mil. In addition, each cabinet shall be protected with full length L-shaped, corrugated fiberboard corner pads. Each pad shall extend from the top of the base platform, to the underside of the top pad. The rear corner pad shall have a minimum thickness of 1/2-inch and a minimum flange length of 2-inches. The front corner pad shall be constructed with one flange a minimum 1/2-inch thick and the other flange a minimum of 1-1/2 inches thick to protect the drawer pulls as shown in figure 4. The pads may be cut, scored and folded or of built-up construction. The cabinet shall rest on a platform of two thicknesses of double-wall corrugated fiberboard. Dimensions of the platform shall be not less than the width and length of the cabinet, plus the thickness of the corner pads. One thickness of the same material shall be used to protect the top of the cabinet, the dimensions of which shall be the same as the base platform (see figure 4).

5.1.2 Level B. Each cabinet, prepared as specified in 5.1.1, shall be packaged in a close-fitting box conforming to PPP-B-636, style RSC, type CF, Variety DW, grade 500. The box shall be closed in accordance with the appendix to the box specification.

5.1.3 Level C. The cabinets shall be preserved and packaged to afford protection against damage from the supplier to the initial destination.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each filing cabinet, of like description, packaged as specified in 5.1.1, shall be packed in a close-fitting box conforming to PPP-B-585, class 3, style 1 or 2; PPP-B-591, class II; PPP-B-601, overseas type; PPP-B-621, class 2 or PPP-B-650, type II. Each box shall be provided with a sealed case liner conforming to MIL-L-10547, type I or II, grade B or C, class 2. Closure and strapping shall be in accordance with the appendix to the box specification.

5.2.2 Level B. Cabinets, packaged as specified in 5.1.2, shall not require additional packing.

5.2.3 Level C. Cabinets, packaged as specified in 5.1. shall be packed to insure carrier acceptance and safe delivery at destination at lowest rates, in containers complying with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special markings required by the contract or order, the shipping container shall be marked in accordance with Fed. Std. No. 123 and as specified in 5.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

5.3.2 Military agencies. In addition to any special markings required by the contract or order, the shipping container shall be marked in accordance with MIL-STD-129 and as specified in 5.3.3.

5.3.3 Additional markings. In addition to markings specified herein, arrows or prominent marks shall be located on the sides of each shipping container to indicate the position in which the container shall be handled during shipment. The word "UP" shall be located at the point of the arrow in letters at least 2-inches in height. The front panel of each shipping container shall be plainly marked as follows:

UP FURNITURE UP

FRAGILE

HANDLE WITH CARE

Top panels shall be plainly marked as follows:

FURNITURE

FRAGILE

HANDLE WITH CARE

TOP

THIS SIDE UP

6. NOTES

6.1 Intended use. The cabinets covered by this specification are intended to be used to store active card index records.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Size and type required (1.2).
(c) If preproduction sample requirement is waived (3.1).
(d) If locks are required (3.2.2.1.2).
(e) If special marking is required (3.5 and 5.3).
(f) Applicable level of packaging and packing (5.1 and 5.2).

6.3 Cross reference data. Table IV lists the sizes and types of this specification that correspond to the types and sizes of superseded specification AA-F-00352a

TABLE IV. Classification in this document and corresponding classification in AA-F-00352a

This specification	AA-F-00352a
Type I	Size 1
Type II	Size 2
Type III	Size 3
Size 1	Type I
Size 2	Type II

6.4 Standard color panels. Sample panels of the standard color of finish are obtainable from the Regional Business Service Centers, Federal Supply Service, General Services Administration.

6.5 Definition of welding and brazing terms.


6.5.1 Resistance welding. Resistance welding is a group of welding processes wherein coalescence is produced by the heat obtained from resistance of the work flow of the electric current in a circuit of which the work is a part, and by the application of pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6.5.2 Spot welding. Spot welding is a resistance welding process wherein coalescence is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes.

6.5.3 Fusion welding. Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined without mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from external source.

6.5.4 Brazing. Brazing is the joining of metals with the aid of a filler metal of a different composition having a melting point above 800 degrees Fahrenheit.

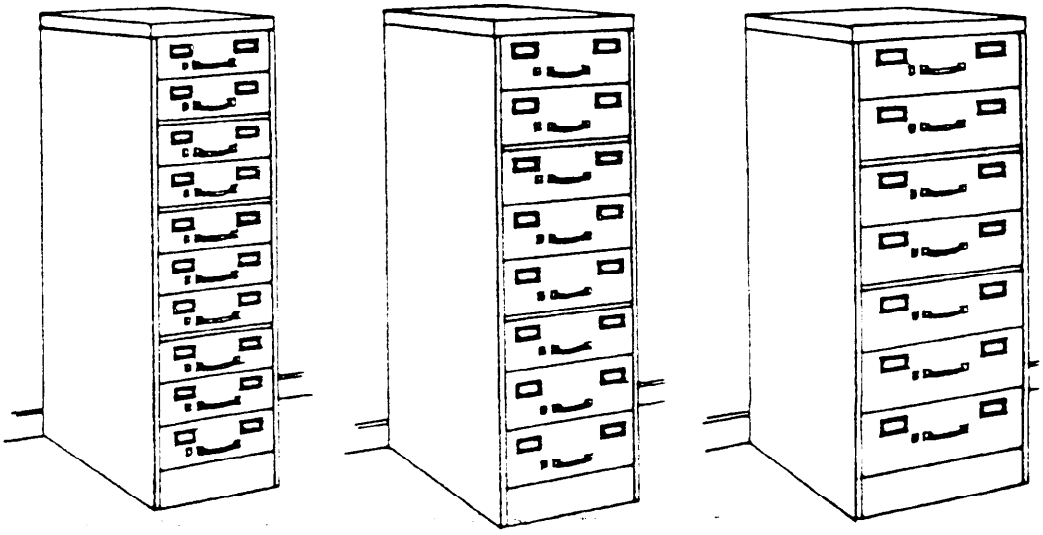

Type I Type II Type III

FIGURE 1.


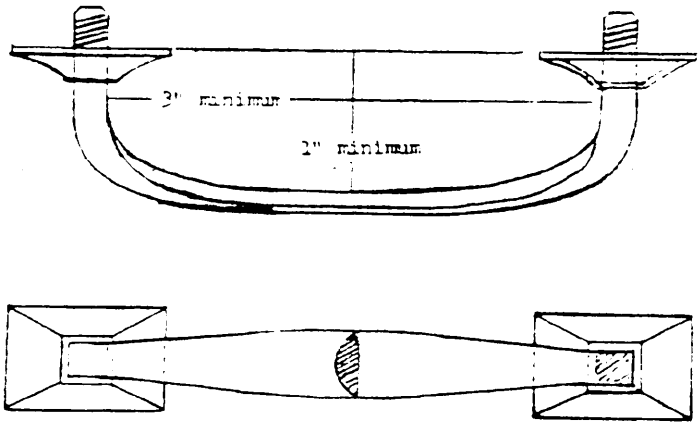


FIGURE 2. Drawer pull.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.


X = Must be more than 90°
Y = Must be equal dimension

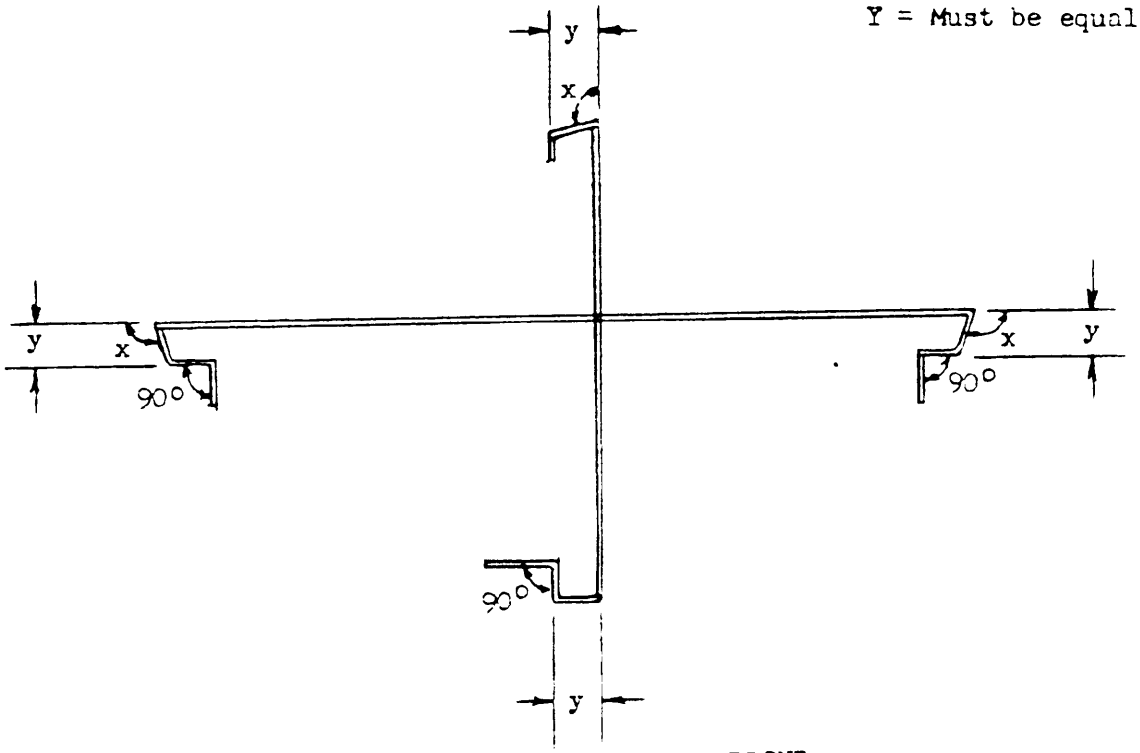

TYPICAL OUTSIDE DRAWER FRONT

FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

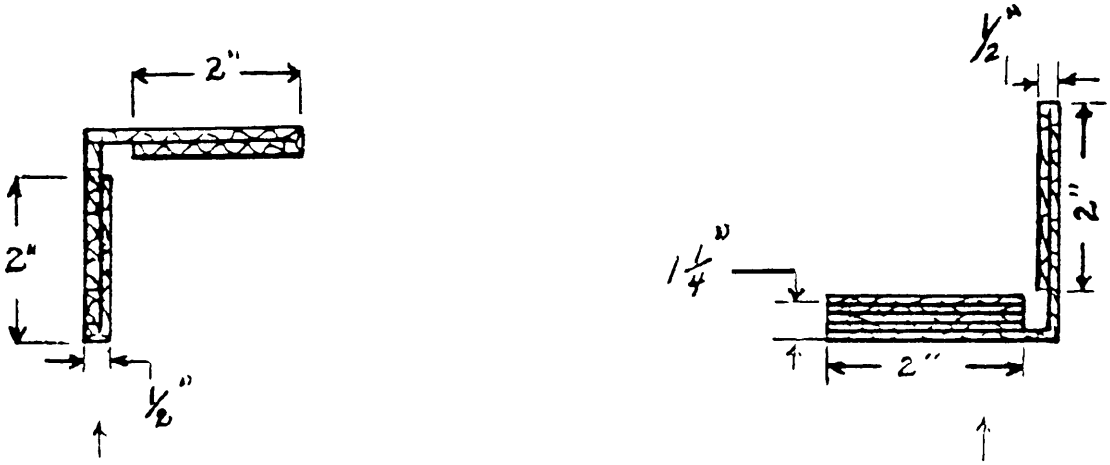

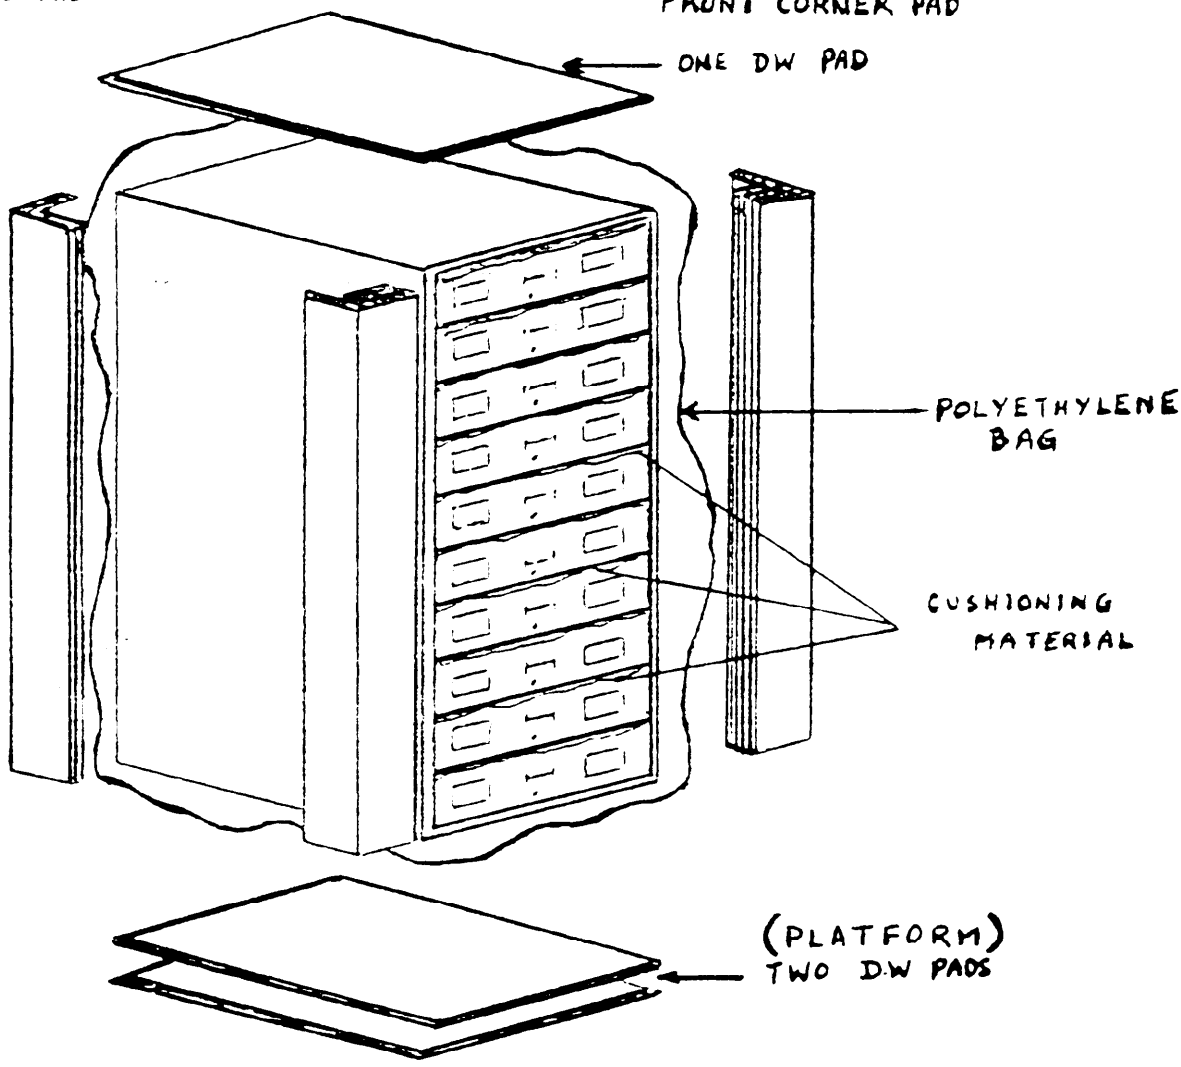


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, fold, staple, and mail.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-F-00352B(GSA-FSS) Filing Cabinets, Steel, Card Size, Vertical

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time, temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

GSA OC 70.1319

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

FOLD

GENERAL SERVICES ADMINISTRATION

OFFICIAL BUSINESS

POSTAGE & FEES PAID
GENERAL SERVICES ADMINISTRATION

General Services Administration
Federal Supply Service (FMSF)
Washington, D. C. 20406

FOLD

GSA FORM FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

strip along the back cushion. The upholstery final cover material shall be arranged in an

the boxing