INTERIM FEDERAL SPECIFICATION

WARDROBE WITH ACCESSORY PIECES, WOOD, STEEL FRAME

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1. Scope. This specification covers a knockdown (K.D.) wardrobe, overchest, and a "set-up" three drawer chest. They are intended for use in barracks, dormitories, and other similar installations. The wardrobe provides a high degree of pilferage protection for the contents (see 6.5).

1.2 Classification.

1.2.1 Types. Wardrobe, overchest and three drawer chest shall be of the following types, classes, and sizes as specified herein and as shown in applicable figures.

Type I - Wardrobe, K.D.

Size 1 - 36 inches wide by 26 inches deep by 80 inches high.
Size 2 - 42 inches wide by 26 inches deep by 80 inches high.
Size 3 - 46 inches wide by 26 inches deep by 80 inches high.

Type II - Accessory pieces.

Class 1 - Overchest (K.D.)

Size 1 - 36 inches wide by 26 inches deep by 14 inches high.
Size 2 - 42 inches wide by 26 inches deep by 14 inches high.
Size 3 - 46 inches wide by 26 inches deep by 14 inches high.

Class 2 - Three drawer chest set-up, 20-3/4 inches wide by 21-1/2 inches deep by 24 inches high.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative and Non-decorative.
NN-P-71 - Pallets, Material Handling, Wood, Double Faced Stringer and Block Construction.
QQ-A-200/GEN - Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 2024.
QQ-A-200/9 - Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 6063.
QQ-S-781 - Strapping, Steel, Flat and Seals.
LLL-B-810 - Building Board, (Hardboard) Hard Pressed, Vegetable Fiber.
PPP-B-591 - Boxes, Fiberboard, Wood-cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-760 - Strapping, Nonmetallic, (and Connectors).

Federal Standards:

Fed. Test Method Std. No. 101 - Preservation, Packaging, and Packing Materials: Test Procedures.
Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

FSC 7105

GSA DC 76 5367

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standard:

D905 - Standard Method of Test for Strength Properties of Adhesives in Sheer by Compression Loading.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Department of Commerce Publications:

CS-236 - Mat-Formed Wood Particleboard.
PS-51 - Hardwood and Decorative Plywood.

(Copies of the Commercial Standards and Product Standards referenced above, which are Department of Commerce publications, may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington, DC 20402. Prices may be obtained from the Superintendent of Documents.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Iron and Steel Institute:

Steel Products Manual.

(Copies may be obtained from American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 4.5.1 and 6.2(c)), before production is commenced, one sample of the unit shall be submitted or made ready for the contracting officer or his authorized representative to inspect. When the forcible entry test is required (see 4.4.4 and 6.2(f)), two samples of the wardrobe unit shall be submitted. The unit(s) shall be presented in KD condition, (except three drawer chest). The KD unit(s) may be previously assembled and disassembled before inspection. It (they) shall be packaged, packed, and marked as specified in Section 5 of this specification. Packaging, packing, and marking shall be inspected at this time. Components shall be inspected and the unit(s) assembled according to the manufacturer's instruction sheet. The completed unit(s) shall then be inspected and tested to determine compliance with this specification. The forcible entry test (4.4.4) when required, shall be performed on one of the two sample units. Approval of the preproduction sample authorizes commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Materials. All materials shall be hereinafter specified. All materials shall be unused in their present state and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel used to fabricate the frames and metal angles shall be cold rolled, cold rolled oiled, hot rolled pickled and oiled, or hot rolled annealed of commercial quality as defined in the Steel Products Manual. The steel shall be smooth, free from rust, scale, pits, scratches, laps, crimps, and buckles or other defects affecting strength or appearance. The gage numbers specified and the decimal equivalents thereof shall be in accordance with the Steel Products Manual.

3.2.1.1 Finish, metal (all units). Welded frames shall be cleaned of foreign matter and weld spatter, bonderized or primed, and completely coated with an enamel and baked. The color of the enamel shall blend with the interior of the wardrobe. Steel angles shall have the same finish and preparation as the welded frames.

3.2.2 Aluminum. The aluminum used in the fabrication of extrusions shall be alloy temper 6063-T5 or 6063-T52 of QQ-A-200/9 and have a satin finish. Extrusion configurations are illustrated in figure 8.

3.2.3 Wood.

3.2.3.1 Solid wood parts. Wood shall be uniformly dried without case hardening or honeycombing, to a moisture content of 5 to 8 percent at time of fabrication. Wood shall be free from defects which might impair serviceability or appearance except as follows:

a. Sound, tight knots not over 1/2 inch in average diameter provided they are not in clusters, except not over 1/4 inch for drawer sides.
b. Holes not over 1/16 inch in diameter, except drawer sides and backs.
c. Surface checks with barely perceptible opening not over 4 inches long.
d. Bark, gum or pitch pockets not over 1/8 inch wide and 2 inches long, except drawer parts exposed when open.

3.2.3.2 Hardwood plywood. The hardwood plywood shall be constructed according to the requirements of Product Standard PS-51 and as specified herein. Bondage shall not be less than type II. Face and back veneers shall be not less than 1/28 inch thick before sanding. Crossbands shall be not less than 1/24 inch thick. Veneers shall be of the wood specified in 3.2.3.3.

3.2.3.3 Wood varieties. Solid and plywood parts shall be one of the following species: Ash, Andiroba, Beech, Birch, Cherry, Hackberry, Hickory, Maple, Magnolia, Oak, Pecan, Poplar, Red Alder, or Sweetgum.

3.2.4 Hardboard. Hardboard shall be type I-tempered, surface 1 with a decorative white enamel finish and thickness 1/8 inch as required in LLL-B-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.5 Adhesive. Adhesive used in the application of plastic laminate to particleboard, and in the construction of the three drawer chest, shall be as follows: Any adhesive that will develop an average blockshear strength of not less than 2,800 P.S.I., when tested as specified in 4.4.1.

3.2.6 Particleboard. The particleboard shall be in accordance with any of the following types, grades, and classes in Commercial Standard CS 236:

Type I, grade A (high density), class 1.
Type I, grade B (medium density), class 2, except that panels less than one inch thick shall have a minimum average screw holding capacity of 235 pounds on the edges and 285 pounds on the faces.
Type II, grade A (high density), class 2.

The thickness of the particleboard shall be as hereafter specified. The moisture content of the particleboard shall not exceed 9 percent at time of laminating.

3.2.6.1 Finish, particleboard, (all units). "Tee" molding shall be used where indicated within this specification. Panels, including edges not faced with a laminate or "Tee" molding, shall be finished and sealed as specified. The sealed surfaces shall blend with the interior of the wardrobe unless otherwise specified. A laminate as specified in 3.2.7 and 3.2.7.1 shall be securely applied to the components as shown in table I. Sharp edges on finished panels shall be "eased".

3.2.7 Plastic laminate. (Except top on three drawer chest). Decorative plastic laminate for use on furniture in this specification shall conform to specification L-P-508, style D, type II, class 2, finish A, satin, subclass NF (except laminate used on drawer fronts, which shall be subclass F). All vertical surfaces shall have a thickness of 0.031 ± .004. The grain of wood grain plastic shall run in the direction of the longest dimension. The backing sheet shall be in accordance with L-P-508, style ND, type V, and a thickness of 0.030 ± .004 inches. The color/grain of the plastic laminate shall be as shown in table I unless otherwise specified in the invitation to bid. (see 6.2).

3.2.7.1 Plastic laminate. (Three drawer chest, top). Plastic laminate used for the top shall be as specified in 3.2.7 except that it shall be type I, general purpose and have a thickness of 0.050 ± .004. Backing sheet shall be the same as specified in 3.2.7.

3.2.7.2 Application of plastic laminate. Surface of the particleboard shall be suitable for application of the plastic laminate. The laminate shall be securely applied, providing a tight, uniform bond. Adhesive used shall conform to that specified in 3.2.5.

3.2.8 "Tee" molding. "Tee" molding shall be vinyl or butyrate of extruded design. Color of "Tee" molding shall be champagne unless otherwise specified in the invitation to bid. (See 6.2).

TABLE I. Finish and color/grain on panel faces

	Component	Color/Grain 1)	Exterior 2)	Interior
Type I Wardrobe	Doors	English Oak	D	D
	End panels	Champagne	D	ND
	Toe board	Black	D	ND
	Top		S	S
	Bottom		S	S
	Back	Champagne	D	ND
Type II (class 1) Overchest	Door	English Oak	D self-edge	D
	End panel	Champagne	D	ND
	Top		S	S
	Back	Champagne	D	ND

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Finish and color/grain or panel faces (con.)

Component	Color/Grain 1)	Exterior 2)	Interior
Type II (class 2) Three drawer chest			
Drawer fronts 3)	English Oak	D - subclass F	ND
Top 4)	English Oak	D - self-edge	ND
End panels	Champagne	D	ND
Toe board	Black	D	ND
Bottom		S	S
Back		S	S

1) A standard reference panel shall be used to determine the acceptability of the color/grain of the plastic laminate (see 6.3).

English Oak. FSS-L-01008
Champagne: FSS-L-01009
Black: FSS-L-01013

2) D - Decorative laminate
ND - Non-decorative laminate
S - Sealed and finished in a color compatible with the interior of the wardrobe.

3) All decorative laminate shall be subclass NF-Nonforming except the drawer fronts which shall be subclass F-Forming.

4) All decorative laminate shall be vertical surface grade (type II) except the chest top which shall be general purpose grade (type I). (See paragraphs 3.2 7 and 3.2.7.1)

3.2.9 Hardware

3.2.9.1 Door handle, latching mechanism and associated hardware. The left door shall be provided with a three point latching and locking mechanism, equal functionally to the one shown in figure 9. The three point latching mechanism shall engage the unit behind the shelf support frame member, through the bottom frame member and at the approximate center of the right door. When doors are closed and the latching mechanism engaged, the handle shall be in the vertical position. When handle is in vertical position there shall be no clearance between the handle hasp and the keeper. The retaining rod shall be not less than 1/4 inch thick at points of engagement. The engagement at the shelf support member and bottom shall be 1/2 inch minimum. Each retaining rod shall operate through two rod guides, one secured as close to the shelf support member for the upper rod and as close to the bottom of the door for the lower rod as practicable when handle is in open position and one near the rod middle. Each rod guide shall be attached as illustrated in figure 9. The bottom rod shall be 35-3/4 inches (plus/minus 1/32 inch). The mechanism shall operate quietly, smoothly, without binding, and with a minimum amount of free play. When mechanism is engaged, the doors shall be securely latched. There shall be minimum movement between the rods and the engaging points (see 6.4).

3.2.9.2 Hinge, Wardrobe. Door hinges shall be minimum 12 gage (.1046) steel, 3-1/2 inches long, 5-knuckle, tamper-proof. The knuckles shall be tack welded or brazed closed to resist opening. The pin shall be minimum 1/4 inch in diameter and shall be capped, welded or brazed to prevent forced removal. Both wings of the hinge shall be off-set 90 degrees to permit mounting of hinge to the face and edge of the door, the end panel and frame member. Hinges shall be finished in the same manner as the wardrobe frame or shall have a chromium finish which is compatible with the face hardware on the door.

3.2.9.3 Hinge, Overchest. Door hinges shall be steel, minimum 0.072 inch thick, minimum 2-1/2 inches long, 5-knuckle, tamper-proof type. The pin shall be minimum 1/8 inch in diameter and shall be secured in a manner to prevent forced removal. Both wings of the hinge shall be offset 90 degrees to permit mounting of hinge to the face, and edge of the door, the top panel, and the frame member. Hinges shall be finished in the same manner as the wardrobe frame or shall have a chromium finish which is compatible with the face hardware on the wardrobe door Alternatively, the wardrobe hinge (3.2.9 2) may be used on the overchest.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.9.4 Elbow catch and strike. The elbow catch (shown in figure 8) shall be steel or brass, with a dull nickel or cadmium plating. The head of the elbow catch lever shall be not less than 1/4-inch deep to provide positive, secure latching of the door. The elbow catch and steel strike shall be fabricated as shown in figure 8.

3.2.9.5 Towel bar. Towel bar shall be minimum 5/8-inch diameter chrome plated steel tubing with chrome plated brackets. The tube shall be a minimum of 14 inches long for size 1 and a minimum of 16 inches long for size 2 and 3 wardrobes. Alternatively, the steel tubing may be another cross sectional shape provided the dimensions are approximately the same (see 6.4).

3.2.9.6 Mirror. Mirror shall be chrome plated steel, 0.025 inch thick minimum. Overall size shall be 24 inches long by 13-3/4 inches wide. (plus or minus 1/4 inch). Sharp corners and edges shall be eased (see 6.4).

3.2.9.7 Glides. Adjustable glides mounted to tee nuts or inserts in the wood blocks attached to the toe board shall be plastic 3/4 inch minimum diameter, with a 1/4-20 threaded steel stem. A nail type plastic glide, 3/4 inch minimum diameter, shall be securely attached to the bottom - rear of each end panel.

3.2.9.8 Clothes rod. Shall be a minimum 1 inch diameter, a minimum of 22 gauge (.028) tubing steel, plated in a bright or satin chrome. Two steel ring brackets, chrome, cadmium, or zinc plated, and six No. 6 by 5/8 or four No. 8 by 3/4 inch sheet metal screws shall be furnished with each clothes rod.

3.2.9.9 Drawer suspensions. Drawer suspensions shall be metal, two piece with ball bearing nylon rollers. Suspensions shall have a positive stop when drawer is opened. Drawer shall be easily removeable. Action shall be smooth and quiet. Suspensions shall be capable of meeting the test specified in 4.4.2.

3.2.9.10 Capped T-nuts. Capped T-nuts shall be 1/4-20 with a minimum 47/64 diameter head. Through screws and lock washers shall be used with capped T-nuts. Either capped T-nuts or blind head bolts shall be used throughout a single unit. A mixture is not permissible.

3.2.9.11 Bolts, blind head. Bolts shall be either carriage or fin head type with 1/4-20 threads. Bolt head finish shall be compatible with the handle finish. Cap nuts with lock washers shall be used with these bolts. Either capped T-nuts or blind head bolts shall be used throughout a single unit. A mixture is not permissible.

3.3 Construction of wardrobe.

3.3.1 Design. The appearance of the unit and the arrangement of interior components shall be as shown in the applicable figures. The unit shall be of the knockdown type (K.D.) which can be readily assembled. Screws used in assembly shall be the slotted or phillips head type only.

3.3.2 Fabrication. Suitable jigs and fixtures shall be used in fabrication to insure accurate fit and easy assembly of wardrobe components. Pre-drilled lead holes shall be provided as necessary for the ready location and assembly of all components.

3.3.3 Assembly. The front frame shall be shipped with the doors attached. The rear frame shall be shipped with the back attached. The end panels, top, bottom, toe board and shelf shall be shipped knockdown. Care shall be exercised to include all components and hardware needed to assemble each unit properly. Mechanical fasteners, such as nuts, bolts, washers, etc., shall be grouped and packaged by size, and identified in the same way as in the instruction sheet, for ease of assembly.

3.3.3.1 Assembly instruction sheet. The manufacturer shall prepare an instruction sheet, written for two man assembly with simple illustrated assembly directions. The instruction sheet shall list all tools necessary for assembly. When bolts and nuts are used in lieu of capped T-nuts, the following note shall be put in the instructions "Caution: Do not over-tighten cap nuts." It shall be available for use and approval at the time of the preproduction inspection. The approved assembly instruction sheet shall be packaged with each unit and placed in same package with hardware

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.4 Overall dimensions (excluding face hardware).

Size 1 - 36 inches wide by 26 inches deep by 80 inches high. (plus/minus 1/8 inch).
Size 2 - 42 inches wide by 26 inches deep by 80 inches high. (plus/minus 1/8 inch).
Size 3 - 46 inches wide by 26 inches deep by 80 inches high. (plus/minus 1/8 inch).

3.3.5 Component tolerances. Fabrication of the components shall be accurate, with tolerances maintained that provide a tight, rigid unit.

3.3.6 Steel frame assemblies. All frame members shall be 1 inch by 1 inch, formed or rolled steel angle of the steel specified in 3.2.1. When a formed steel frame is used, it shall be 10 gage (.1345) minimum. When a structural steel frame (angle iron) is used, it shall be 1/8 inch thick minimum. All joints shall be continuously fusion welded. (fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from external sources.)

3.3.6.1 Rear frame. The rear frame shall consist of two vertical and three horizontal steel members (see figure 5). These frame members shall be assembled using any of the three joint construction methods illustrated in figure 6. When the overlap butt joint construction method is used (figure 6, part C), washers, equal in thickness to the steel frame shall be used at each fastening point to fill the gap between the horizontal frame members and the back panel. Alternatively, the horizontal frame members shall be embossed at each fastening point to fill this gap. The frame members shall be punched with holes in the positions indicated in figure 5. Hole size shall correspond to the fastener used.

3.3.6.2 Front frame. The front frame shall consist of two vertical and three horizontal steel members (see figure 4). These frame members shall be assembled using the over-lap butt joint construction method illustrated in figure 6 - part C. The overall height of the front frame shall be 7/8 inch shorter than the rear frame. A hole of adequate diameter shall be bored through the bottom frame member to receive the latching rod of the door latching mechanism. This hole shall align with the one in the bottom panel. Two rubber or butyrate bumpers shall be securely attached to both the top frame member and the bottom frame member to act as cushions for the doors when they are closed. The frame members shall be punched with holes in the positions indicated in figure 4. Hole size shall correspond to the fastener used.

3.3.7 End panels. End panels shall be 3/4 inch particleboard (3.2.6). The top edges of the end panels shall be flush with top surface of the top panel (plus/minus 1/32 inch) when the unit is assembled. All panels shall be bored to receive eight T-nuts (3.2.9.10) or blind head bolts (3.2.9.11) with four along front and four along rear vertical edges of panels. Eight capped T-nuts or blind head bolts shall be furnished to fasten end panels to the front and rear steel frames. The capped T-nuts shall align with the punched holes in the frames (see figures 4 and 5). Doors shall be flush with the front edge of the end panels, not including "Tee" molding, (plus 0, minus 1/16 inch) when the unit is assembled. Clothes rod and ring brackets (3.2.9.8) shall be supplied with each unit. Lead holes shall be drilled to allow easy mounting of these ring brackets. The clothes rod shall be positioned 2-1/2 inches (plus/minus 1/8 inch) O.C. down from the bottom of the shelf and centered on the end panels. "Tee" molding (3.2.8) shall be securely attached to both the front and back edges of the end panels. The lower front corner of the end panels shall be notched as shown in figure 7 to receive the toeboard. The top edge shall be sealed and finished in a color compatible with the interior or the wardrobe. The bottom edge shall be sealed and finished in a color compatible with either the interior or exterior of the wardrobe. The notched area shall be sealed and finished in a color compatible with the decorative laminate on the end panel. The two faces of the end panel shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). Sharp edges of the laminate shall be eased. One nail glide (3.2.9.7) shall be securely attached to the bottom, rear edge of each end panel. When capped T-nuts are used on the door in lieu of blind head bolts, one nail or stem type bumper, minimum 1/2 inch diameter, shall be securely attached to the lower front edge of each end panel. The bottom of the bumper shall be one inch above the top of the notch in the end panel. The bumpers shall be of a shape and thickness to prevent the end panel from denting the capped T-nuts when the doors are fully opened. The color of the bumper shall blend with the front edge of the end panel.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.8 Doors. Doors shall be 3/4 inch particleboard (3.2.6). Doors shall be attached to front frame with hinges by manufacturer. The hinged edges shall be routed on 4 inch centers from the top and bottom and in the center to receive three hinges (3.2.9.2). One wing of each hinge shall be fastened to the door face with a minimum of three capped T-nuts (3.2.9.10) or blind head bolts (3.2.9.11). The other wing of each hinge shall be continuously fusion welded (minimum 1/2 inch on each edge) to the face of the steel frame and attached to the end panel with a minimum of two sheet metal screws (No. 8 x 3/4"). Alternatively, the hinge may be secured to the face of the steel frame with a minimum of three solid rivets of a diameter which will prevent movement. Clearance between door and end panel, door and top panel shall be minimum 1/16 inch, maximum 1/8 inch when unit is assembled. Clearance between the doors, when shut, shall be minimum 1/8 inch, maximum 3/16 inch. Doors shall be flush with the front edge of end panels, not including "Tee" molding, (plus 0, minus 1/16 inch) when unit is assembled. Doors shall be bored to receive the handle and latching mechanism specified in 3.2.9.1. The three point latching mechanism shall be mounted by the manufacturer (see figures 1, 2, and 9). The handle and keeper shall not be installed. They shall be packaged with the wardrobe hardware. A bolt shall be inserted through the door and latching cam, by the manufacturer, to keep the latching mechanism in place during shipping and handling. When securing the keeper to the door, a counter bore is required to recess the nut and washer into the door so that the top of the nut is flush with the back surface of the door. When wardrobe is assembled, the handle and latching mechanism shall operate quietly, smoothly, without binding and with a minimum amount of free play. When mechanism is engaged, the doors shall be securely latched. There shall be minimum movement between the rods and the engagement points. A "Tee" shaped aluminum strip shall be securely attached by the manufacturer to the free vertical edge of the left door as shown in figures 2 and 8. The free vertical edge of the right door shall either have "Tee" molding (3.2.8) securely applied or be self-edged. The top, bottom, and hinged edge of both doors shall be sealed and finished in a color compatible with the interior of the wardrobe. The two faces of both doors shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). Sharp edges of the plastic laminate shall be eased. A towel bar (3.2.9.5) and a mirror (3.2.9.6) shall be provided with each wardrobe. Lead holes shall be drilled to allow easy mounting of the towel bar, centered on the inside of the right door, four feet above floor level. The mirror shall be mounted securely by the manufacturer on the inside of the left door with the top of the mirror 5 inches down from the top of the door (see figures 2 and 3).

3.3.9 Back. The back shall be 1/2 inch particleboard (3.2.6). The top edge of the back shall be flush with the top edges of the end panels. The bottom edge of the back shall be flush with the bottom edges of the end panels. The two faces of the back panel shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely attached with adhesive (3.2.5). Sharp edges of the plastic laminate shall be eased. The top and bottom edges of the back shall be sealed and finished in a color compatible with the interior of the wardrobe. The manufacturer shall attach the back to the rear frame using 10 capped tee nuts (3.2.9.10) or blind head bolts (3.2.9.11) and six No. 10 sheet metal screws of adequate length. Two of the capped tee nuts or blind heads bolts shall be used to secure the back to the top frame member and each shall be spaced 12 inches in from the edges of the back panel. Eight capped tee nuts or blind head bolts shall be used to secure the back to the two vertical frame members (four per frame member) with the spacing as shown in figures 4 and 5 for side bolts. Three sheet metal screws shall be evenly spaced on the shelf support frame member and three evenly spaced on the bottom frame member. When the over-lap butt joint frame construction method is used (see 3.3.6.1), washers equal in thickness to the steel frame shall be used at each fastening point to fill the gap between the horizontal frame members and the back panel unless frame has been embossed at fastening points.

3.3.10 Top.

3.3.10.1 Top without overchest. Top shall be 3/4 inch particleboard (3.2.6). "Tee" molding (3.2.8) shall be securely attached to the front edge of the top panel. The front edge of the top panel shall be flush with the front edges of the end panels. Both faces of the top panel shall be sealed and finished in a color compatible with the interior of the wardrobe. Three holes shall be drilled along the front and three along the back edge of each top to accommodate six tee nuts (plain base, without prongs - 1/4-20). These holes shall align with the punched holes in the frames as shown in figures 4 and 5. Doors shall be flush with the top panel, not including "Tee" molding, (plus 0, minus 1/16 inch) when unit is assembled. The edges of the top shall be flush with the top and front edges of both end panels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.10.2 Top with overchest. Top shall be 3/4 inch particleboard (3.2.6). "Tee" molding (3.2.8) shall be securely attached to the front edge of the top panel. The front edge of the top panel shall be flush with the front edges of the end panels. Both faces of the top panel shall be sealed and finished in a color compatible with the interior of the wardrobe. Three holes shall be drilled along the front and three along the back edge of each top to accommodate six machine screws (No. 8-32, 1-1/8 inch long). These holes shall align with the punched holes in the top frame members of the wardrobe as shown in figures 4 and 5. In turn these holes shall align with the weldnuts in the bottom frame members of the overchest so that the overchest and wardrobe can be bolted together when assembled. Refer to paragraph 3.4 for construction of overchest. A mounting hole of correct shape, dimension, and position (see figure 8) shall be bored to receive the latch for the overchest (3.2.9.4). Great care shall be taken to see that the mounting hole is positioned such that when the latch is mounted it will align with the strike plate mounted on the overchest door. Lead holes shall be drilled for the screws used for attaching the latch to the panel. This latch shall be provided with the overchest. Doors shall be flush with the top panel, not including "Tee" molding (plus 0, minus 1/16 inch) when the unit is assembled. The edges of the top shall be flush with the top and front edges of the end panels.

3.3.11 Bottom. Bottom shall be 3/4 inch particleboard (3.2.6). Both faces of the bottom panel shall be sealed and finished in a color compatible with the interior of the wardrobe. A hole of adequate depth and width shall be bored in the bottom panel to receive the bottom latching rod of the three point latching mechanism (3.2.9.1). This hole shall align with the one in the bottom frame member (3.3.6.2). The front and rear corners shall be notched to receive the vertical flanges of the front and rear frame members. The front edge of the bottom panel shall fit under the bottom frame member. It is supported by the toeboard when unit is assembled. Three lead holes shall be drilled along the top-front edge and three along the bottom-rear edge of the bottom panel. These holes shall align with the punched holes in the steel frames as shown in figures 4 and 5. Six sheet metal screws (No. 10 X 3/4 inch) shall be furnished to fasten the panel to the frames. In addition, two lead holes shall be drilled in the bottom face to align with holes in the middle screw cleat on the toeboard (see 3.3.13).

3.3.12 Shelf. Shelf shall be 3/4 inch particleboard (3.2.6). "Tee" molding (3.2.8) shall be securely attached to the front edge of the shelf. The front of the shelf, including "Tee" molding, shall be flush with the front of the shelf supporting member. Both faces of the shelf shall be sealed and finished in a color compatible with the interior of the wardrobe. The front and rear corners shall be notched to receive the vertical flanges of the front and rear frame members. Three lead holes shall be drilled along the bottom of the front and back edges of the shelf. These holes shall align with the punched holes in the steel frames as shown in figures 4 and 5. Six sheet metal screws (No. 10 X 3/4 inch) shall be furnished to fasten the shelf to the frame.

3.3.13 Toeboard assembly. The toeboard shall be 3/4 inch particleboard (3.2.6). It shall be 3 inches high by 42 inches long (size 1), 46 inches long (size 2), including "Tee" mold or self-edge. Both faces shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). Both ends shall either have "Tee" molding (3.2.8) securely applied or be self-edged. The "Tee" molding or self-edge shall match the end panel. The bottom edge of the toeboard shall be sealed and finished in a color compatible with the interior of the wardrobe. Two wood blocks (1-1/2 inches wide by 1-1/2 inches deep by 2-3/8 inches high) shall be glued and screwed to the back of the toeboard with a minimum of one sheet metal screw (No. 10 X 2 inch) per block. The top of the block shall be flush with the top of the toeboard and each block shall be positioned laterally to give the toeboard a snug fit when mounted to wardrobe. One T-nut or internally threaded nylon or metal insert (1/4 X 20) shall be installed by the manufacturer in each of the wood blocks for mounting the adjustable glides (3.2.9.7). Clearance holes shall be bored to allow the glides to be screwed in fully. A wooden cleat (3/4 inches by 3/4 inches by 6 inches long minimum) shall be glued and screwed to the back of the toeboard with two sheet metal type screws (No. 10 X 1-1/4 inch). This cleat shall be flush with the top, center of the toeboard. Each end of the toeboard assembly shall be attached to the end panels with two sheet metal type screws (No. 10 X 2 inch). The center cleat shall be attached to the bottom panel with two sheet metal screws (No. 10 X 1-1/4 inch). Two clearance holes shall be provided in the cleat to permit easy attachment to bottom panel. Lead holes shall be drilled into the end panels and bottom panel to provide for easy installation of the toeboard assembly. None of the screws shall be counter-sunk. When unit is assembled, the edges of the toeboard, including self-edge or "Tee" mold, shall be flush with the outside surface of the end panels.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.4 Construction of the overchest.

3.4.1 Design. The appearance of the overchest shall be as shown in figure 1, 2, and 3. The overchest shall have the capability of being attached to the top of the wardrobe using six machine screws with weldnuts. These machine screws shall penetrate through the two top, wardrobe frame members, through the wardrobe top and through the two bottom, overchest frame members. The overchest shall be knockdown (K.D.) which can be readily assembled. Screws used in assembly shall be the slotted or phillips head type only.

3.4.2 Fabrication. Suitable jigs and fixtures shall be used in fabrication to insure accurate fit and easy assembly of overchest components. Pre-drilled lead holes shall be provided as necessary for the location and assembly of all components. Care shall be taken to insure accurate fit and alignment between the overchest and wardrobe when the two units are assembled.

3.4.3 Assembly. The front frame shall be shipped with the door attached. The rear frame shall be shipped with the back attached. The end panels, top and part of the elbow latch mechanism shall be shipped knockdown. All components and hardware needed to assemble each unit properly shall be included. Mechanical fasteners such as nuts, bolts, washers, etc., shall be grouped and packaged by size and identified in the same way as in the instruction sheet, for ease of assembly.

3.4.3.1 Assembly instruction sheet. The manufacturer shall prepare an instruction sheet with simple illustrated assembly directions. The instruction sheet shall list all tools necessary for assembly. It shall be available for use and approval at the time of the preproduction inspection. The approved assembly instruction sheet for the overchest shall be packaged with each unit and placed in the same package with hardware.

3.4.4 Overall dimensions.

Size 1 - 36 inches wide by 26 inches deep by 14 inches high (plus/minus 1/8 inch).
Size 2 - 42 inches wide by 26 inches deep by 14 inches high (plus/minus 1/8 inch).
Size 3 - 46 inches wide by 26 inches deep by 14 inches high (plus/minus 1/8 inch).

3.4.5 Tolerances.

3.4.5.1 Tolerance between wardrobe and overchest. The maximum tolerance between the wardrobe and overchest in overall width and depth dimension shall be 1/16 inch. The maximum clearance between the two units when joined shall be 1/16 inch.

3.4.5.2 Component tolerance. Fabrication of the components shall be accurate, with tolerances maintained that provide a tight, rigid unit.

3.4.6 Steel frame assemblies. All frame members shall be 1 inch by 1 inch, formed or rolled steel angle of the steel specified in 3.2.1. When a formed steel frame is used, it shall be 14 gage (.0747) minimum. When a structural steel frame (angle iron), is used it shall be 1/16 inch thick minimum. All joints shall be continuously fusion welded. Fusion welding is defined in 3.3.6.

3.4.6.1 Rear frame. The rear frame shall consist of two vertical and two horizontal steel members (see figure 3). These frame members shall be assembled using any of the three joint construction methods illustrated in figure 6. When the over-lap butt joint construction method is used, (figure 6, part C), washers, equal in thickness to the steel used in the frame, shall be used at each fastening point to fill the gap between the horizontal frame members and the back panel. Alternatively the horizontal frame members shall be embossed at each fastening point to fill the gap. The same frame assembly method shall be used for both the wardrobe and overchest so they will be compatible. The lower flange of the bottom frame member shall have three holes with weldnuts welded over each hole as shown in figure 8. These three holes with weldnuts shall align with the ones in the wardrobe top panel and frame members so that the overchest and wardrobe can be bolted together when assembled using machine screws (No. 8-32 X 1-1/8 inch long). Holes shall be punched in the frame as shown in figure 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.4.6.2 Front frame. The front frame shall consist of two vertical and two horizontal steel members (see figure 3). These frame members shall be assembled using the over-lap butt joint construction method illustrated in figure 6 - part C. The lower flange of the bottom frame member shall have three holes with tee nuts welded over each hole as shown in figure 8. These three holes shall align with the ones in the wardrobe top panel and frame member so that the overchest and wardrobe can be bolted together when assembled using machine screws (No. 8-32 X 1-1/8 inch long). Holes shall be punched in the frame as shown in fiugre 3. A slot shall be cut into the center of the bottom frame member to receive the upper door strike as shown in figure 8.

3.4.7 End panels. The end panels shall be 3/4 inch particleboard (3.2.6). Four lead holes shall be drilled, two along the front and two along the rear edge of each end panel to allow easy attachment of the end panels to the frame. These holes shall align with the punched holes in the steel frames as shown in figure 3. Four sheet metal screws (No. 10 X 3/4 inch) shall be furnished to fasten each end panel to the frame. "Tee" molding (3.2.8) shall be securely attached to the front and back edges of each end panel. Door shall be flush with the end panels, not including "Tee" molding, (plus 0, minus 1/16 inch) when unit is assembled. The two faces of the end panel shall have plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive. (3.2.5). Sharp edges of the laminate shall be eased. The top and bottom edges shall be sealed and finished in a color compatible with the interior of the wardrobe. The end panels on the wardrobe and overchest shall align with each other when the units are assembled.

3.4.8 Door The door shall be 3/4 inch particleboard (3.2.6). The door shall be attached to the front frame with hinges, by the manufacturer. The hinged edges shall be routed on 4 inch centers from the left and right end of the door to receive two hinges (3.2.9.2 or 3.2.9.3). These hinges shall be installed in the same manner as the hinges on the wardrobe except that 5/8 inch sheet metal screws shall be used in lieu of capped tee nuts. Lead holes shall be drilled in the door to accommodate the strike plate (3.2.9.4) (see figures 2 and 8). The elbow catch shall work positively and freely with strike plate when the wardrobe and overchest are assembled and attached together. The elbow catch and mounting screws shall be provided with the overchest. Clearance around the door shall be minimum 1/16 inch, maximum 1/8 inch when unit is assembled and attached to the top of the wardrobe. The two faces of the door shall have plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). Sharp edges of the laminate shall be eased. The three free door edges shall either have "Tee" molding (3.2.8) securely applied or be self-edged. The hinged edge of the door shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.4.9 Top. The top shall be 3/4 inch particleboard (3.2.6). "Tee" molding (3.2.8) shall be securely attached to the front edge of the top panel. Three lead holes shall be drilled along the front and back edges of each panel to allow easy attachement of the top to the frame. Size 3/4 inch No. 10 sheet metal screws shall be furnished to fasten this panel to the frames. Door shall be flush with the top panel, not including "Tee" molding, (plus 0, minus 1/16 inch) when unit is assembled. The two faces shall be sealed and finished in a color compatible with the interior of the overchest.

3.4.10 Back. The back shall be 1/2 inch particleboard (3.2.6). The manufacturer shall securely attach the back to the rear frame using 10, No. 10 sheet metal screws of adequate length. The screws shall be positioned as shown in figure 3. When the over-lap butt joint frame construction method is used, (see 3.4.6.1) washers, equal in thickness to the steel frame, shall be used at each fastening point to fill the gap between the horizontal frame members and the back panel unless frame has been embossed at fastening points. The two faces of the back panel shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely attached with adhesive (3.2.5). Sharp edges of the laminate shall be eased. The top and bottom edges shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.5 Construction of the three drawer chest.

3.5.1 Design. The appearance of the chest shall be as shown in figures 2, 11, 12, and 13. The chest is intended for use in the wardrobe or as a free standing night stand.

3.5.2 Assembly. The chest shall be shipped completely assembled by the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.5.3 Overall dimensions. The overall dimensions, including top overhang, excluding face hardware, shall be 20-3/4 inches wide by 21-1/2 inches deep by 24 inches high (plus or minus 1/8 inch).

3.5.3.1 Top overhang dimensions. Front: 1 inch, sides: 1/2 inch, and back: none.

3.5.4 Component tolerances. Fabrication of the components shall be accurate, with tolerances maintained that provide a tight fit, smooth operating drawers, and a rigid unit.

3.5.5 Steel angles. All steel angels shall be 7/8 by 7/8 inch minimum, formed or rolled steel angle of the steel specified in 3.2.1. When formed steel angel is used, it shall be 16 gage (.0598) minimum. When structural steel angle (angle iron) is used it shall be 1/16 inch thick minimum. Angle length shall be at least 3/4 the length of the seam.

3.5.6 Components.

3.5.6.1 Top. Top shall be 3/4 inch particleboard (3.2.6). The two faces of the top shall be covered with plastic laminate, as specified in 3.2.7.1 and table I, securely applied with adhesive (3.2.5). The front and both side edges of the top shall be self-edged. Sharp edges of the laminate shall be eased. The back edge shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.5.6.2 End panels. End panels shall be 5/8 inch (minimum) particleboard (3.2.6). The two faces of the end panels shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). "Tee" molding (3.2.8) shall be securely attached to the front edge of each end panel. The back and bottom edges shall be sealed and finished in a color compatible with interior of wardrobe. One nail type glide (3.2.9.7) shall be securely attached to the bottom front and bottom, back edge of each end panel. Three drawer suspensions (3.2.9.7) shall be securely attached to the inside face of each end panel.

3.5.6.3 Back. Back shall be 1/2 inch (minimum) particle board (3.2.6). Both faces and bottom edge shall be sealed and finished in a color compatable with the interior of the wardrobe.

3.5.6.4 Bottom. Bottom shall be 1/2 inch (minimum) particleboard (3.2.6). Both faces shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.5.6.5 Toeboard. Toeboard shall be 3/4 inch particleboard (3.2.6). Both faces shall be covered with plastic laminate, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). The decorative laminate shall be black. The top and bottom edge shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.5.6.6 Drawer fronts. Drawer fronts shall be 3/4 inch particleboard (3.2.6). Drawer fronts shall be minimum 6-1/2 inches high. The top and bottom edge of each front shall be shaped as shown in figure 11. The exposed face of the front shall be covered with decorative plastic laminate, subclass F, as specified in 3.2.7 and table I, securely applied with adhesive (3.2.5). The back face shall be covered with a backing sheet, as specified 3.2.7 and table I, securely applied with adhesive. The back face of the drawer fronts shall be routed to receive the drawer sides and bottom. The side and bottom edges shall be painted black.

3.5.6.7 Drawer sides, back, and bottom. Sides and back shall be not less than 3/8 inch, solid wood or 5-9 ply plywood (see 3.2.3 through 3.2.3.3). Either solid or plywood may be used for the sides and back as long as both drawer sides are the same construction. Sides shall be minimum 5-1/2 inches high by minimum 18 inches long. The top edge of the drawer back shall be located 3/16 inch down from the top edge of the drawer sides. Bottom shall be 1/8 inch thick (minimum) hardboard (3.2.4). Drawer front and sides shall be grooved to receive the bottom. The top edge of drawer sides and back shall be rounded. Drawer sides shall be joined to the front with glued and driven (French) dovetails. The drawer sides shall be joined to the back with multi-finger dovetails milled true and even. The female portion of the dovetail shall be on

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

the drawer sides and the male portion on the drawer back. Any open, poorly milled, poorly glued, or unevenly assembled dovetails are not acceptable. The bottom shall over-lap the back and be glued, and pneumatically stapled. Alternatively the back shall be grooved to receive the bottom. All staples shall be driven flush with surface. The drawer bottom shall be reinforced with not less than six rubbed in place glue blocks. Adhesive used for all joints shall be as specified in 3.2.5. The drawer sides and back shall be sealed prior to assembly and waxed after assembly. All drawers shall be equipped with drawer suspensions as specified in 3.2.9.9. A locking hasp shall be mounted to the top drawer and cabinet as shown in figure 10. The offset on part A may be formed, brazed, or welded. The amount of offset in part A may vary to accommodate variations in darwer construction. The face of the drawer shall be notched sufficiently to allow for mounting the locking hasp. The finish of the locking hasp shall be either baked black enamel, satin nickel, or chrome plated. The holes in the two hasp members shall align when top drawer is closed.

3.5.7 Assembly method 1, wood. Components described in 3.5.6.1 through 3.5.6.7 shall be assembled as shown in figures 11 through 13. Wood used shall conform to 3.2.3 through 3.2.3.3. The top shall be secured to the case using adhesive and nine sheet metal screws of adequate length (two through each screw cleat and three through the top front frame member). Clearance of 1/8 inch (plus 0, minus 1/32 inch) shall be provided around each drawer. All drawers shall operate smoothly and quietly. All unfinished edges shall be sealed and finished in a color compatible with the interior of the wardrobe.

3.5.8 Assembly method 2, steel angels. Components described in 3.5.6.1 through 3.5.6.7 shall be assembled using steel angles (3.5.5). A sufficient number of screws shall be used in each angle to provide a tight, solid joint. The components shall be positioned as shown in figures 11 through 13. Clearance of 1/8 inch(plus 0, minus 1/32 inch) shall be provided around each drawer. All drawers shall operate smoothly and quietly. All unfinished edges shall be sealed and finisned in a color compatible with the interior of the wardrobe.

3.6 General requirements (apply to all units).

3.6.1 Identification marking. Each item shall be permanently and legibly marked in an inconspicuous place with the National Stock Number, contract number, date of manufacture, the manufacturer's name or trade mark and the specification number, so that the source of supply may be readily determined.

3.6.2 Workmanship. A high degree of craftsmanship shall be exercised to eliminate the possibility of any hinderance to the proper function of the unit; to eliminate the possibility of injury to personnel or damage to their clothes; to assure that the occurrence of defects will not exceed the acceptable quality level specified herein, and to produce a finished commodity that is satisfactory in serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Inspection shall be performed as indicated in paragraph 3.1.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the specified requirement of referenced subsidiary specifications and standards, or if none, in accordance with this specification

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:41Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection of end item. The lot shall be all units of the same type offered for inspection at one time. The samples shall be completely assembled units or units ready for assembly as applicable.

4.3.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in table II.

TABLE II. Acceptable quality levels in accordance with MIL-STD-105

For examination in	Inspection level	AQL's Major	AQL's Total
4.3.4	I	4	10.0
4.3.5	I	-	6.5
4.3.6	I	-	6.5
4.3.7	I	-	6.5

4.3.4 Visual examination, assembled units. The assembled units shall be examined for defects as specified in table III (see 4.3.3).

TABLE III. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Material	Aluminum or steel components not of material or gage specified.		X
	Species of wood in any wood component not of material or size specified.		X
	Particleboard not of material or size specified.		X
Laminated plastic	Not material specified, incorrect thickness.		X
	Face or backing sheet missing.	X	
	Poor adhesion, i.e. blistered, peeled, wrinkled, broken, cut, scratched, or marred.	X	
	Face sheet damaged, dented, cracked, marred, or discolored.		X
	Scratch or nicks in face sheet affecting appearance.		X
	Wrong color or grain.		X
Enamel finish	Poor adhesion, i.e. blistered, checked, peeling; tacky (not dry to touch); color separation, stain, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Color not compatible as required.		X
	Scratch through to base metal, bare spots, rust under coating.	X	
Workmanship and Construction (general)	Any part missing except lockwashers, screws and rivets.	X	
	Malformed or mislocated parts affecting serviceability.	X	
	Broken, punctured, or cracked parts. Sharp edge or projection that may cause injury.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification Major	Classification Minor
Workmanship and Construction (general) (con.)	Malformed, mislocated, damaged, buckled or warped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X
	Incorrect formation or design of component preverting it from adequately performing its specified function.	X	
	Edges not "eased off" where required.		X
	Any loose or unsound glue joint.		X
	Spacing of screws not as specified.		X
	Screw point visibly bulging surfaces.	X	
Screws, lockwashers and rivets	Screws and lockwashers not metal plated; threads stripped on more than one screw, more than one screw, lockwasher or rivet missing		X
	Threads stripped on screws, one screw, lockwasher, or rivet missing.		X
Vinyl "Tee" moulding	Wrong color.		X
	Wrong size, buckled, dented, cracked, loose, broken, or sharp edges	X	
Self-edge	Not securely and neatly applied.		X
Door handles	Wrong type, no latching device.	X	
Hinges	Wrong type; not secured to door and frame as specified.	X	
Miscellaneous hardware	Wrong type, wrong location, not securely attached.		X
Three point latching mechanism	Does not latch door securely.	X	
	Rattles, does not operate smoothly.		X
Elbow latch	Does not operate smoothly.		X
	Does not latch overchest door securely	X	
Identification marking	Missing, not permanent, illegible, incomplete or incorrect.		X
End panels	Not flush with top and door fronts as specified.	X	
Doors	Excessive gap between doors, not hung evenly.	X	
Top and bottom, and shelf	Wrong dimensions, not perpendicular to end panels	X	
Back	Wrong color		X
	Wrong type, wrong dimensions, not attached properly	X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examination	Defect	Classification Major	Classification Minor
Toe board	Wrong dimensions, wrong position, wood blocks not secure.	X	
Welding	Missing, not sound (broken, cracked, burnt, poor adhesion).	X	
	Not ground smooth, protrudes or pits not filled.		X
Steel frame assemblies	Not steel specified, not rigid, cross members not perpendicular to vertical members, gaps in joints.	X	
Drawers	More than one drawer glue block missing.	X	
	Drawer does not close completely.		X
	Binds, does not operate smoothly.	X	
	Gap around drawers not as specified.		X
	Holes in locking hasp do not align.	X	
Three drawer chest case construction	Glue block or screw cleat missing. (wood construction).	X	
	Insufficient number of fasteners used.		X
Top (three drawer chest)	Top not self-edged		X

4.3.5 Examination of assembly (excluding three drawer chest). Units unassembled for knock-down shipment shall be selected from each inspection lot, assembled and examined in accordance with the defects specified in table IV. Knocked down wardrobes and/or overchests shall be assembled to insure that the individual parts will intermember, maintain accurate alignment and be easily assembled. Wardrobe and overchest shall intermember properly, when applicable (see 4.3.3).

TABLE IV. Visual defects of assembly

Examine	Defect
Assembly	Not easily assembled, i.e. requires modification, excess force or enlargement of holes.
	Assembled units twisted, buckled, or out of square.
Assembly instructions	Missing, illegible or incorrect.

4.3.6 Dimensional examination. Any dimension not within tolerance specified shall be classified as a defect (see 4.3.3).

4.3.7 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table V. The sample unit shall be one shipping container fully prepared for delivery The lot size shall be the number of containers in the inspection lot (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Preparation for delivery defects

Examine	Defect
Marking	Incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Any non-conforming components, component missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, panels, and doors of contents and padding of perimeter edges.
Contents	Not as specified.

4.4 Tests, general. All products or containers damaged in making these tests shall be at the expense of the manufacturer.

4.4.1 Test for adhesives. Test for adhesives shall be as shown below.

Test for adhesives

Component	Characteristic	Requirement reference	Test method	Sample unit
Adhesive	Block shear test	3.2.5	ASTM D 905 1/ 2/	1/2 pint

1/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The test joints, upon removal from pressure, shall be conditioned at a relative humidity of 40 ± 4 percent.

2/ A test specimen that fails at less than 2,800 p.s.i. and displays 50 percent or more wood failure, shall be disregarded when computing the average shear strength. When the average shear strength, (a) is less than the required 2,800 p.s.i., (b) has a 10 percent or greater difference between the high and low test specimen values, and (c) one or more samples fails at 2,800 p.s.i. or more, the test shall be rerun.

4.4.2 Drawers, three drawer chest. A chest unit shall be securely anchored at the base for stability. The top drawer shall be 2/3 opened and a load of 50 pounds shall be distributed along the entire upper edge of the drawer head for 30 minutes. The drawer shall then be capable of normal operation, with weight removed, with the tolerance specified in figure 11.

4.4.3 Forcible entry test, wardrobe (performed only when specified, see 3.1 and 6.2). Hardware for wardrobe shall resist forcible entry for two (2) cumulative minutes (10 minutes total elapsed time). Entry into the unit in two (2) minutes or less shall constitute failure of the test. Test shall be performed by the contracting officer's appointed representative. The following data shall apply to the test:

(a) Conditions:
1) Wardrobe shall be free standing
2) Floor shall be carpeted or unit shall be placed on a minimum 6 x 6 foot section of carpet with attached non-slip padding
3) Ambient temperature, 60-85°F
4) Padlock shall have a minimum 5/16 inch shackle
5) Tester may wear gloves

(b) Tools which shall be used by person performing test:

1) One screwdriver (as specified in figure 14)
2) One section of pipe - 3/4 inch I.P.S., schedule 40, 10 inches long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(c) Areas of attach may include the following:

1) Handle and surrounding area
2) Padlock
3) Keeper
4) 3 point latching mechanism
5) Capped tee nuts or blind head bolts
6) Astragal
7) Hinges and surrounding area

(d) Note: At the option of the contracting officer, the back, top, and sides may also be tested.

4.5 Tests, packing.

4.5.1 Test report. The test cycle specified herein is intended to determine compliance with the requirements (see 4.6) for level A or B packing and shall be required on two units identical to the item being packed for each level of packing specified in the contract or order. No testing is required for level C packing. Tests may be conducted by the manufacturer using his own test equipment, by the manufacturer's container supplier, or in a commercial testing laboratory. A test report, indicating no damage to the contents and no functional damage to the container and packing, will be accepted as proof of compliance for the level of packing specified in the contract or order and shall be made available to the inspector. The test results shall be obtained from test conducted on units identical to those specified in the contract or order. Test results, obtained as a result of tests conducted prior to date of contract or order, shall contain a complete description of the packaging, packing, materials, and items packed within 12 months prior to date of a new contract or order. A packed item, identical to the ones which passed to compliance test (see 4.6), shall be made available for identification by the Government representative and remain at the supplier's plant until the last shipment on the contract as a guide in determining that the packaging and packing furnished on the contract conforms to the items tested. At the option of the Government, it may be required that the tests conducted by a supplier with his own test equipment, or by the manufacturer's container supplier, shall be conducted under the supervision of the Government Inspector.

4.5.2 Examination after testing. After the specified tests (see 4.6) for levels A or B have been accomplished, a visual examination shall be made of the shipping container and its contents. Any damage to the components or functional damage to the container or packing shall be cause for rejection. Structural damage to the container, which could result in spilling or exposure to the contents or failure of the contractor in subsequent handling, is cause for rejection. Substantial shifting of the contents within the container that create conditions likely to cause damage during shipment, storage, and reshipment, will also be cause for rejection. Minor container damage will not be cause for rejection. When the visual examination has been completed, the tested KD units shall be assembled. Any bent, twisted, or misaligned components that prevent proper assembly of the wardrobe or operation of its doors and door handles shall be cause for rejection.

4.6 Test procedures, packed units. The following tests describe the procedures and equipment for preshipment testing of packed units. A test cycle in the order specified herein shall consist of all the tests required for a packed item.

4.6.1 Conditioning. Packed units conforming to the requirements for level A packing shall be conditioned at 100° ± 3°F and 90 percent ± 3 percent relative humidity for 48 hours prior to testing. They shall then be tested within six hours after being removed from the high temperature and humidity environment. No pre-test conditioning is required for level B packing.

4.6.2 Vibration test. Packed units shall be subjected to the Vibration (Repetitive Shock) Test, Methods 5091 of Fed. Test Method Std. No. 101. The shipping container shall lay on its largest face, as it would normally be stacked, on the vibrating platform. The length of time the container is subjected to vibration shall be 1 hour when level B packing is required, or two hours when level A packing is required.

4.6.3 Superimposed - Load Test. Packed units shall be subjected to a compressive load of 9300 pounds using Method 5016 of Fed. Test Method Std. No. 101. The load shall be applied for 1 hour, in a direction perpendicular to the largest container face, as it would be under normal stacking conditions. No vertical deflection measurements are required. This test applies to levels A and B packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.6.4 Drop test.

4.6.4.1 Set-up chest. The packed set-up chests shall be tested in accordance with the Incline Impact Test, Method 5023 of Fed. Test Method Std. No. 101. The optional timber shown in figure 1 of the test method shall not be used. An impact test cycle shall consist of one impact on each of the six faces of the pack and the number of cycles that constitute a complete test shall be as follows for the level of packs specified:

Level A packs - 2 cycles.
Level B packs - 1 cycle.
Level C packs - Not required.

4.6.4.2 Knocked-down wardrobe and overchest. The packed knock-down wardrobes or overchests shall be subjected to the Cornerwise Drop (Rotational) Test, Method 5005 of Fed. Test Method Std. No. 101. The drop height shall be 36 inches for a level A pack and 27 inches for a level B pack. The container shall be dropped once on each of two diagonally opposite corners of the largest face of the container. The container shall then be turned over and dropped once on each of the remaining two diagonally opposite corners of the face opposite to the first one used.

5. PREPARATION FOR DELIVERY

5.1 Packaging Each wardrobe or chest, set-up or knocked-down, with its component parts shall be wrapped and cushioned to prevent damage when tested in accordance with the applicable portions of section 4.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2 1 Level A Each wardrobe or chest, packages as specified in 5.1 shall be packed in a box conforming to PPP-B-591, class II, PPP-B-601, overseas type, PPP-B-621, class 2, PPP-B-636, class weather-resistant; or to PPP-B-640, class 2. Each box shall be closed, sealed, and strapped or reinforced in accordance with the appendix to the applicable box specification. The packed boxes closed, sealed, and strapped or reinforced shall be individually tested in accordance with the level A requirements and level A tests of Section 4 of this specification.

5.2.2 Level B Each wardrobe or chest, packaged as specified in 5.1, shall be individually packed with the necessary cushioning, blocking, and bracing in a close-fitting box. Each box shall be closed, sealed, and strapped or reinforced to comply with level B requirements and level B tests of Section 4 of this specification.

5.2.3 Level C Each wardrobe or chest, packaged as specified in 5.1, shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification Rules or the National Motor Freight Classification Rules.

5.3 Palletization.

5.3.1 Wardrobes. When specified, not less than 6 nor more than 10 wardrobes packed as specified in 5.2.1, or 5.2.2 shall be packed on pallets conforming to NN-P-71 type II, with the following exceptions: (a) the minimum length and width of the pallets shall be not less than the width and length, respectively, of the packed wardrobes (b) each pallet shall have five stringers, and (c) the spacing between the top deck-boards shall be no more than 3 inches. The load shall be secured to the pallet with a minimum of three straps perpendicular to the wardrobe length and two perpendicular to the wardrobe width. Strapping used shall conform to QQ-S-781, type I or PPP-S-760, type II or III. The minimum strap size shall be 3/4 by .023 inches for QQ-S-781 and 1/2 by .030 inches for PPP-S-760.

5.3.2 Knocked-down chests. When specified not less than 6 nor more than 10-knocked-down chests packed as specified in 5.2.1 or 5.2.2 shall be palletized. The pallet shall be a 4-way entry reversible type. The minimum length and width of the pallets shall be not less than the width and length respectively, of the packed chests. The containers shall be placed on the pallet in two stacks of five each. The load shall be secured to the pallet with a minimum of 1 strap perpendicular to the chest length and two straps perpendicular to the chest width. Strapping used shall conform to QQ-S-781, type I or PPP-S-760, type II or III. The minimum strap size shall be 1/2 by .020 inches for QQ-S-781 and 1/2 by .015 inches for PPP-S-760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2 as specified by the contract or order.

5.4.1 Civil agencies. In addition to the special markings required by 5.4.3 each shipping container shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military agencies. In addition to the special markings required by 5.4.3, each shipping container shall be marked in accordance with MIL-STD-129.

5.4.3 Special marking.

5.4.3.1 Set-up chests. In addition to the markings required by 5.4, arrows shall be placed on the side of the shipping container not more than 3 inches down from the top edge to indicate the position in which the shipping container shall be stored and handled. The word "UP" shall be placed at the point of the arrows in letters at least 2 inches in height.

The front panel of the shipping container shall be plainly marked as follows:

FURNITURE

FRAGILE, HANDLE WITH CARE

The top panel shall be plainly marked as follows:

FURNITURE

FRAGILE, HANDLE WITH CARE

THIS TOP

THIS SIDE UP

Additionally, to facilitate color identification, one side panel and the front panel of each container shall have an area approximately 3 inches wide by 6 inches high painted to match the color of the drawers contained therein.

5.4.3.2 Knocked-down wardrobes or overchests. In addition to the markings required by 5.4, the top panel shall be plainly marked as follows:

FURNITURE

FRAGILE, HANDLE WITH CARE

TOP

THIS SIDE UP

Additionally, to facilitate color identification, two adjacent side panels of each container shall have an area approximately 3 inches wide by the depth of the box painted to match the color of the wardrobe doors or chest door contained therein.

6. NOTES

6.1 Intended use. These units are intended for use in barracks, dormitories, and other similar installations. The wardrobe provides a high degree of pilferage protection for the contents (see 6.5).

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and size of unit required (see 1.2.1). The overchest, when required, must be ordered with the wardrobe so they will both be made by the same manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(c) If preproduction sample requirement is waived (see 3.1).
(d) Level of packaging and packing required (see 5.1).
(e) Color/grain of decorative laminate and tee molding, if requirements differ from those specified in 3.2.8 and table I.
(f) If forcible entry test is required (see 3.1 and 4.4.3).

6.3 Laminated plastic samples. Sample panels and a list of products which exemplify the standard color/grain and finish may be obtained from:

Technical Support Branch,
National Furniture Center
GSA-FSS
Washington, DC 20406

6.4 Sources of supply. The following manufacturers/distributers are known sources of supply for the items indicated.


3.2.9.1 Door handle and latching mechanism.
Bassick Sack Division #25666, or equal
Stewart-Warner Corporation
Winston-Salem, NC 27105

3.2.9.5 Towel bar.
Hall-Mack #896, or equal
Harrodsberg, KY 40330


3.2.9.6 Mirror, (chrome plated steel).
American Nickeloid
Peru, IL

6.5 Supersession. This specification supersedes the type IV and V units found in Interim Federal Specification AA-W-001791a.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

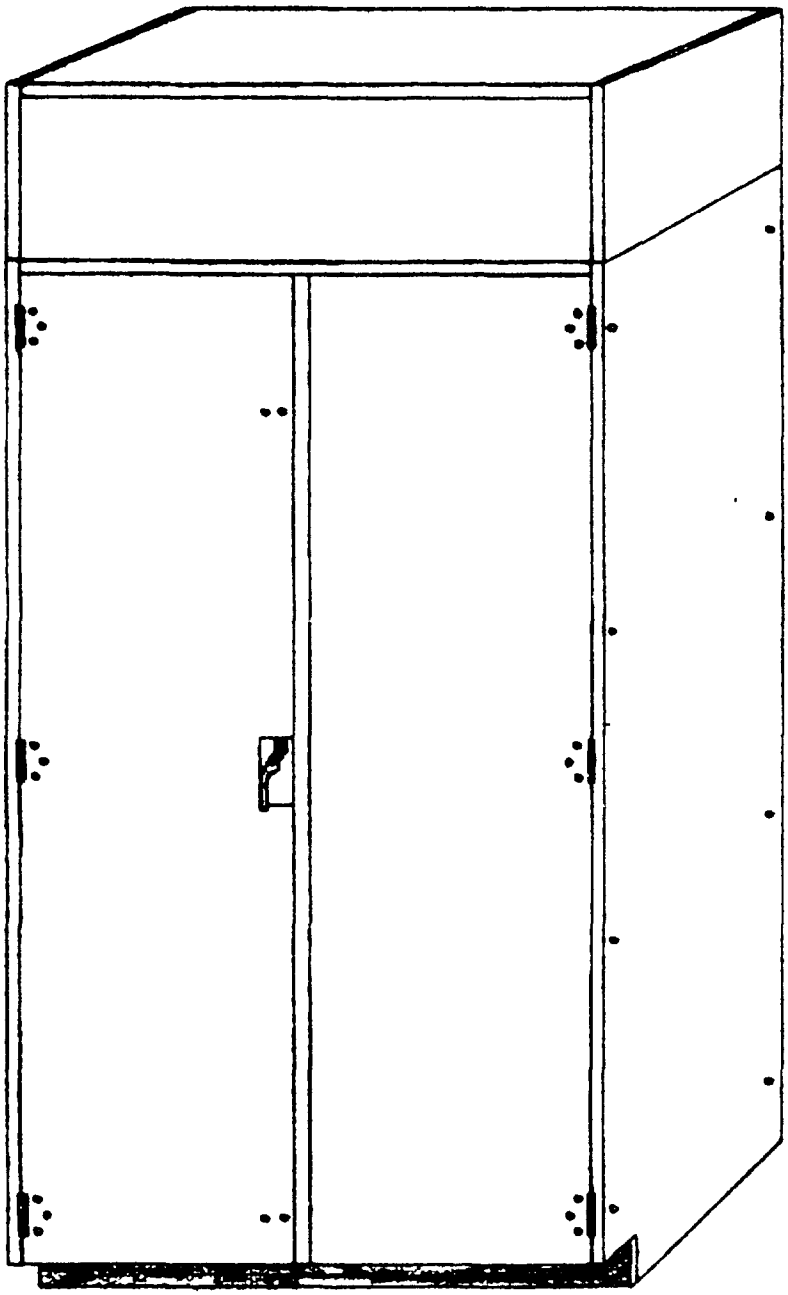

Front View

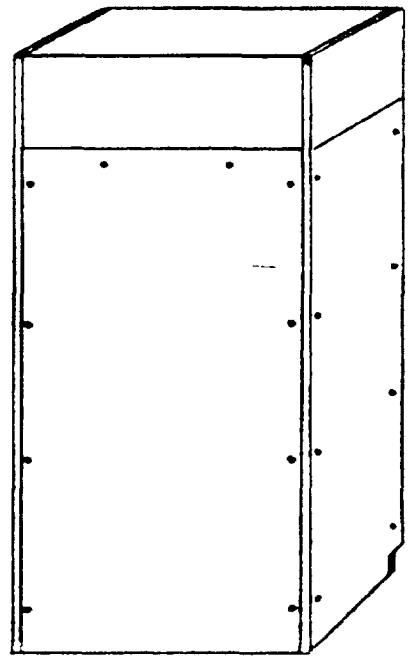


Back View

Wardrobe and Overchest

Figure 1. Not to scale


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

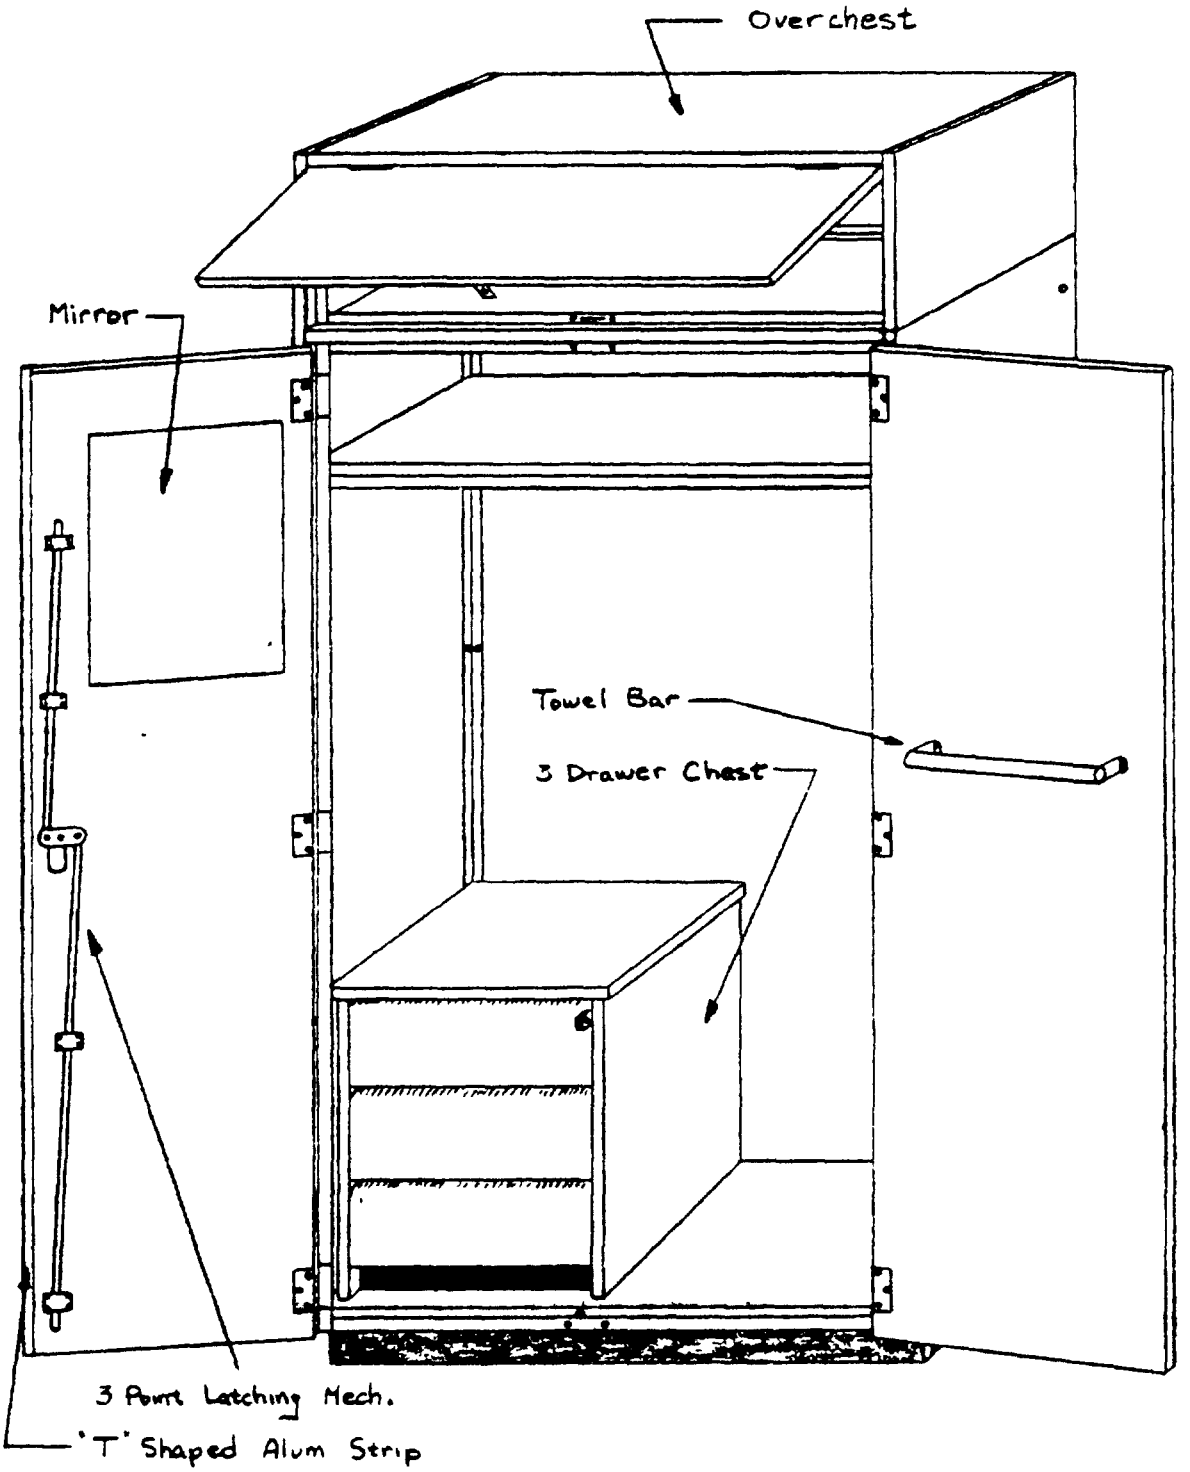

Wardrobe, Overchest, 3 Drawer Chest

Figure 2. Not to scale

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

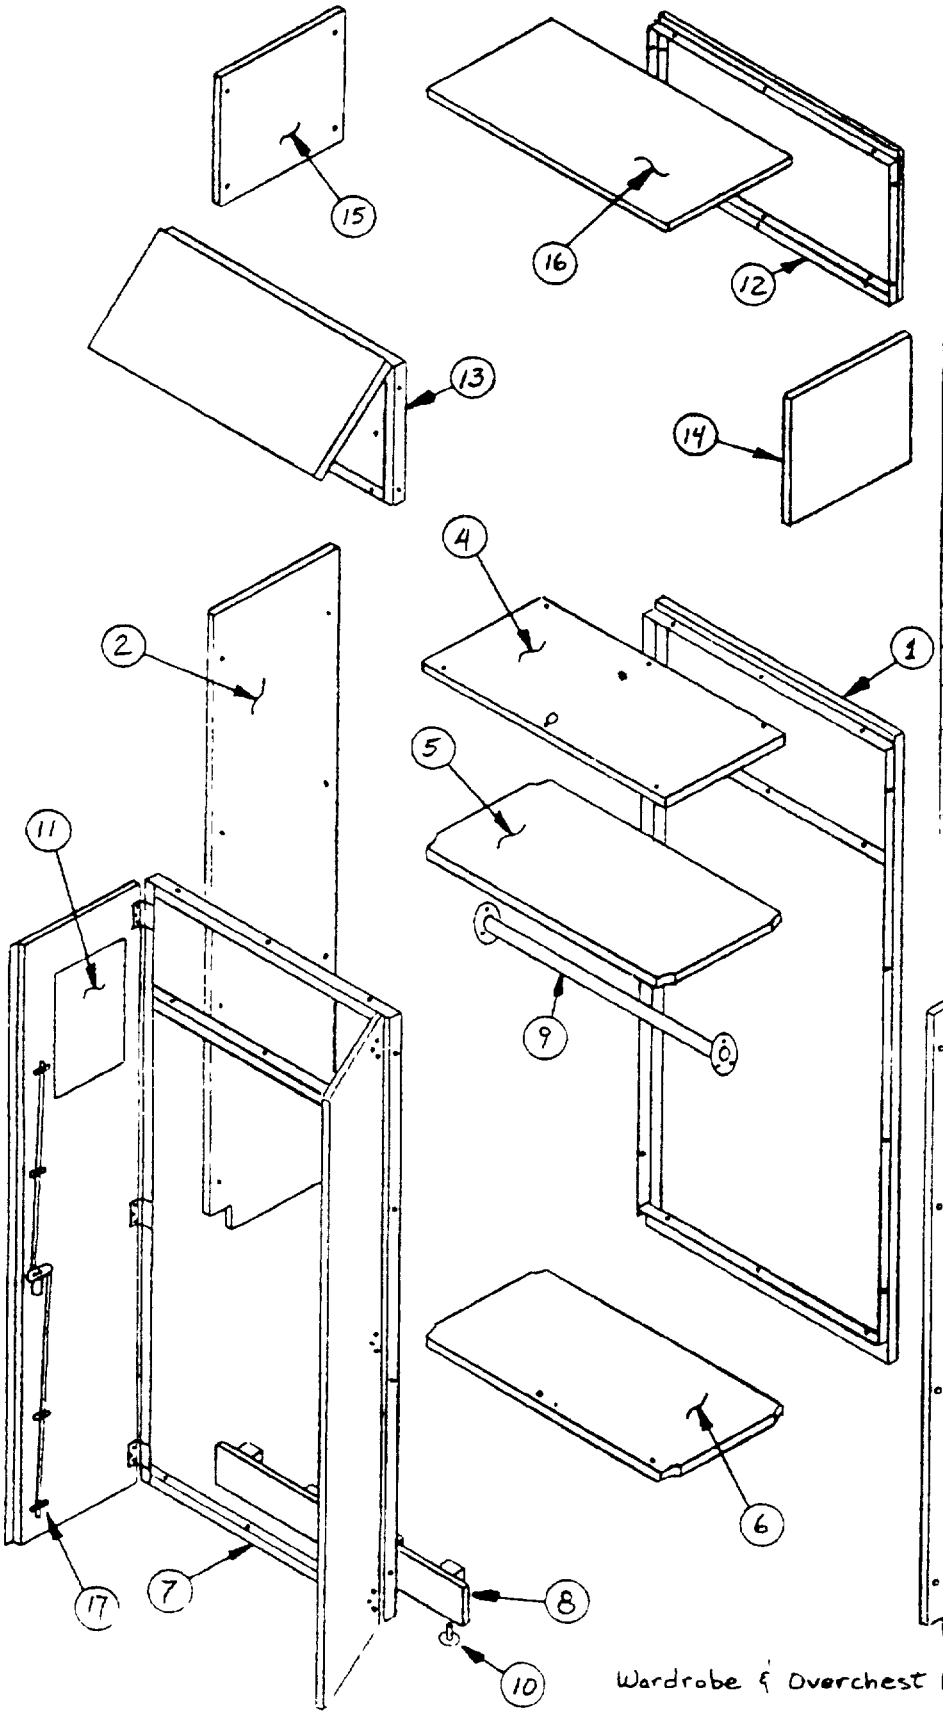


1	1	Rear Frame Assembly
2	1	End Panel (left side)
3	1	End Panel (right side)
4	1	Top (wardrobe)
5	1	Shelf
6	1	Bottom
7	1	Front Frame Assembly
8	1	Toe Board Assembly
9	1	Clothes Rod
10	2 2	Adjustable glides Nail type glides
11	1	Mirror
12	1	Rear Frame Assembly
13	1	Front Frame Assembly
14	1	End Panel (right side)
15	1	End Panel (left side)
16	1	Top (overchest)
17	1	3 Pt Latch Mech.

Wardrobe & Overchest (exploded view)

Figure 3 Not to scale

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

DO NOT SCALE

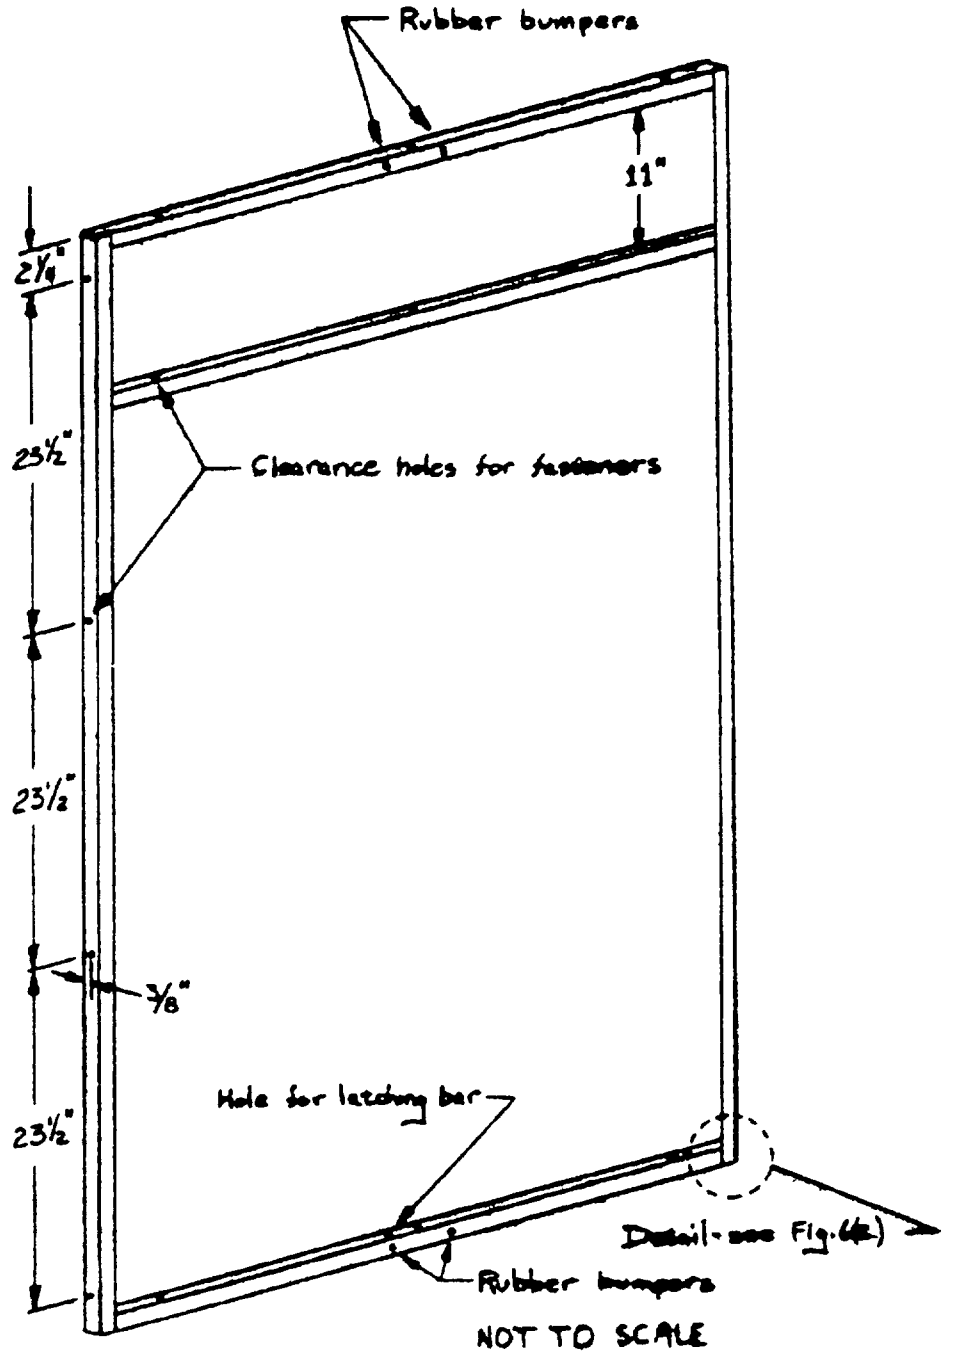


Front frame assembly for wardrobe

Figure 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.


DO NOT SCALE

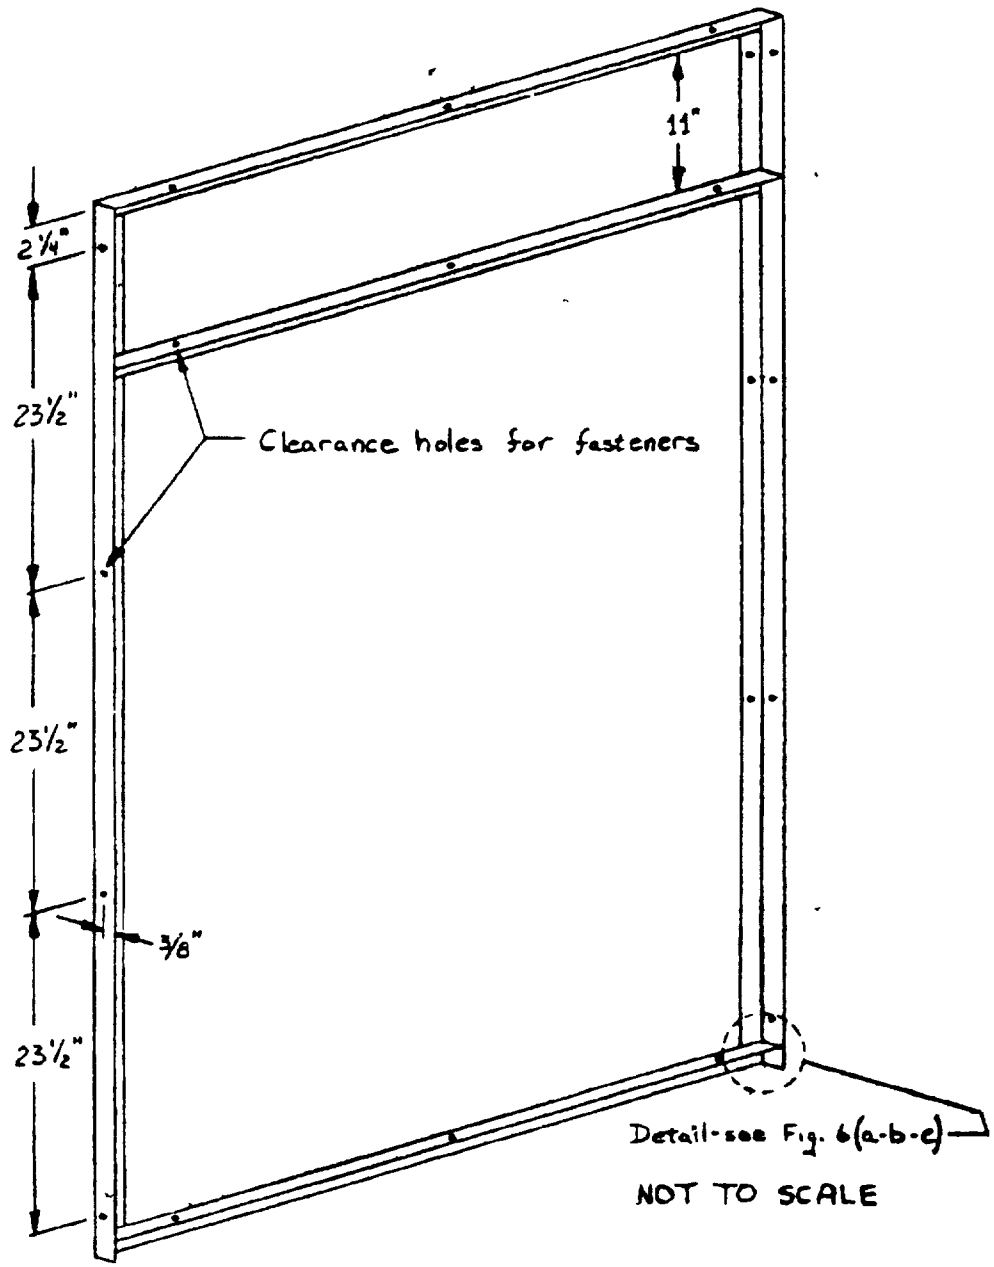


Rear Frame Assembly for Wardrobe

Figure 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

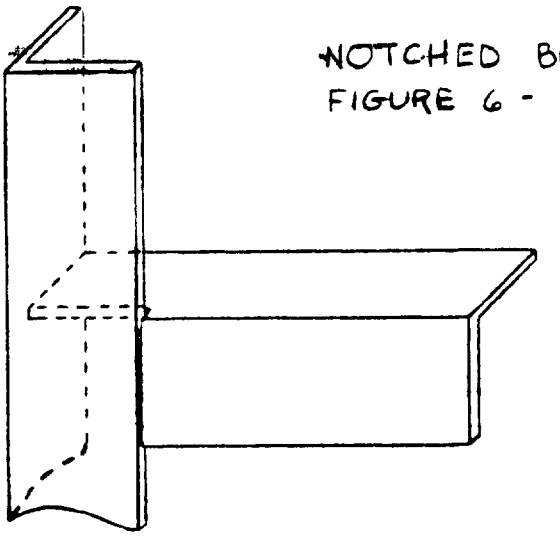

NOTCHED BUTT JOINT
FIGURE 6 - PART A

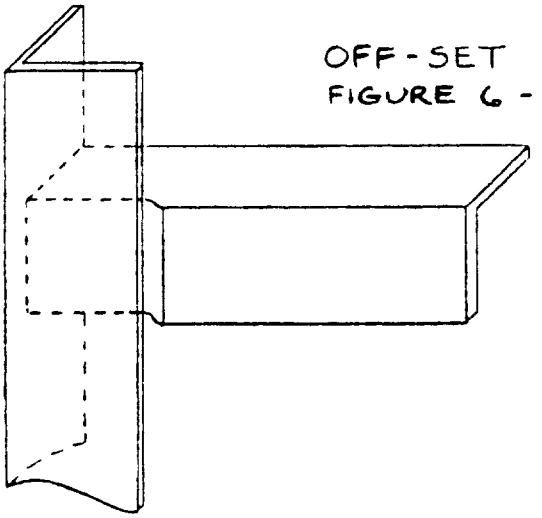


OFF-SET BUTT JOINT
FIGURE 6 - PART B

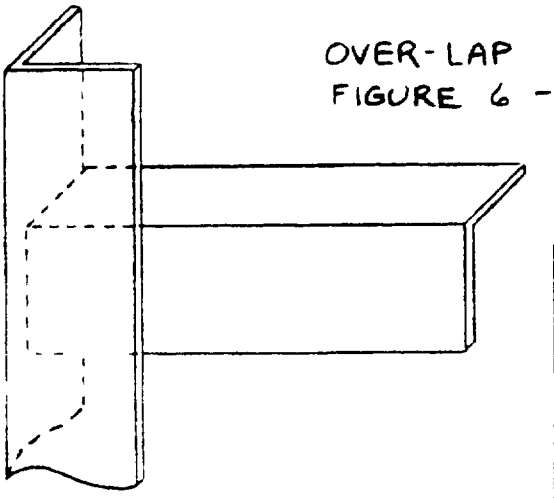

OVER-LAP BUTT JOINT
FIGURE 6 - PART C

VARIOUS JOINT CONSTRUCTIONS
FOR METAL ANGLES
NOT TO SCALE
FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

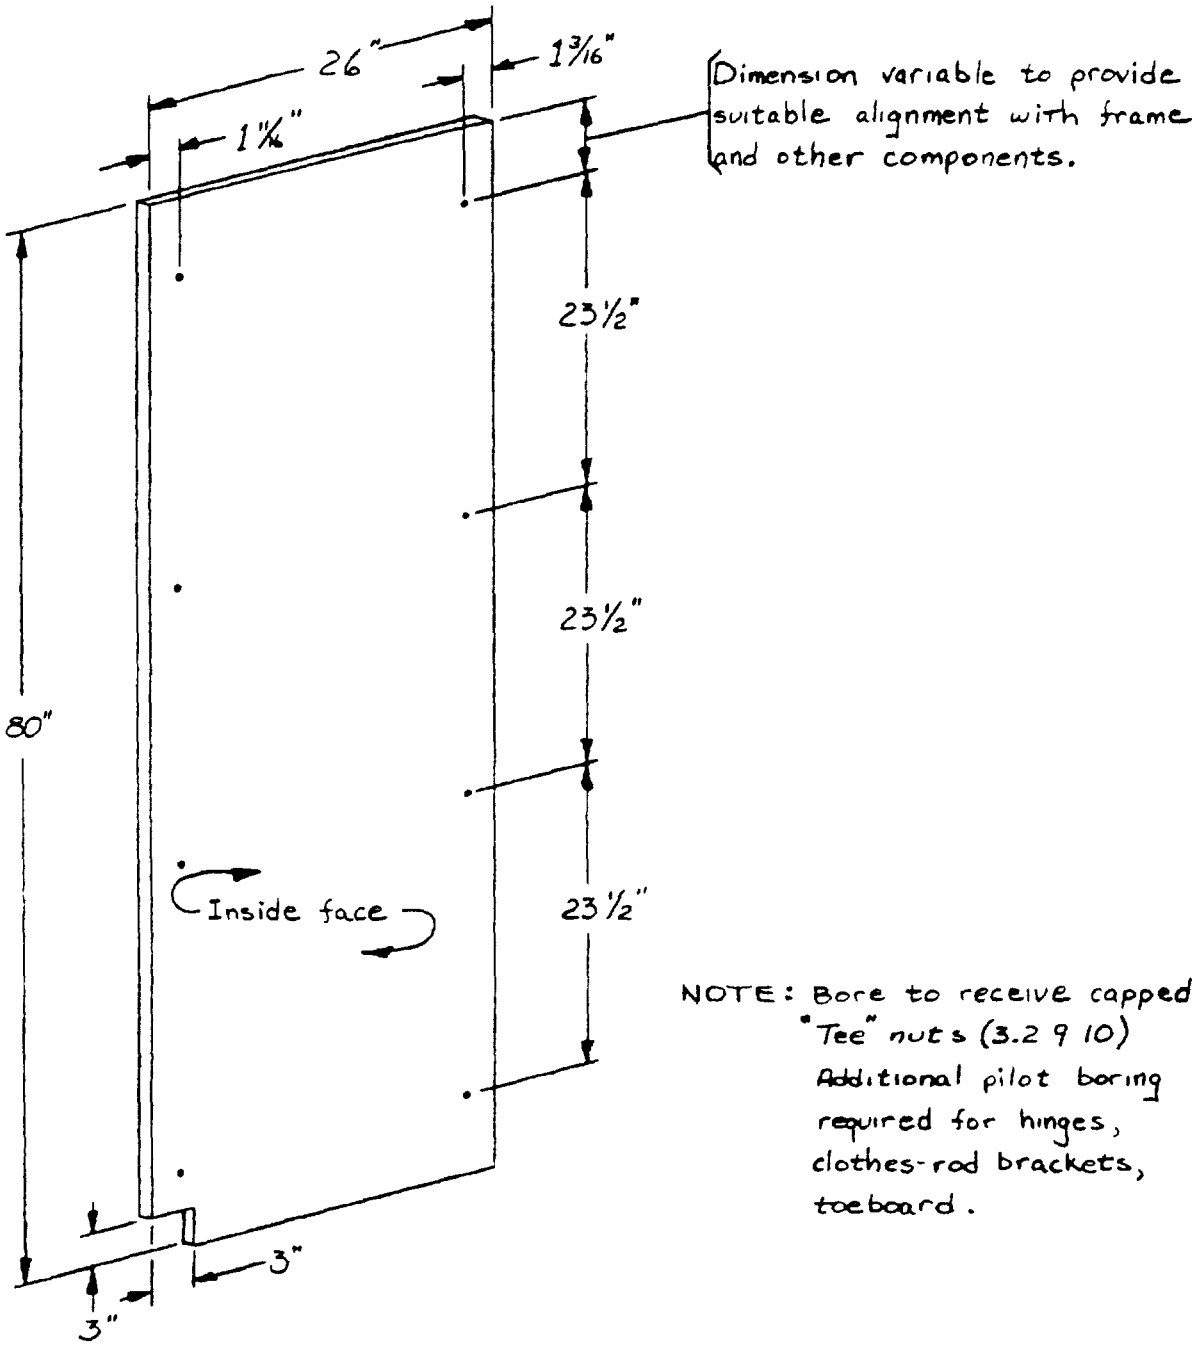


NOTE: Bore to receive capped "Tee" nuts (3.2 9 10) Additional pilot boring required for hinges, clothes-rod brackets, toeboard.

END PANEL (LEFT) FOR WARDROBE

NOT TO SCALE


Figure 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

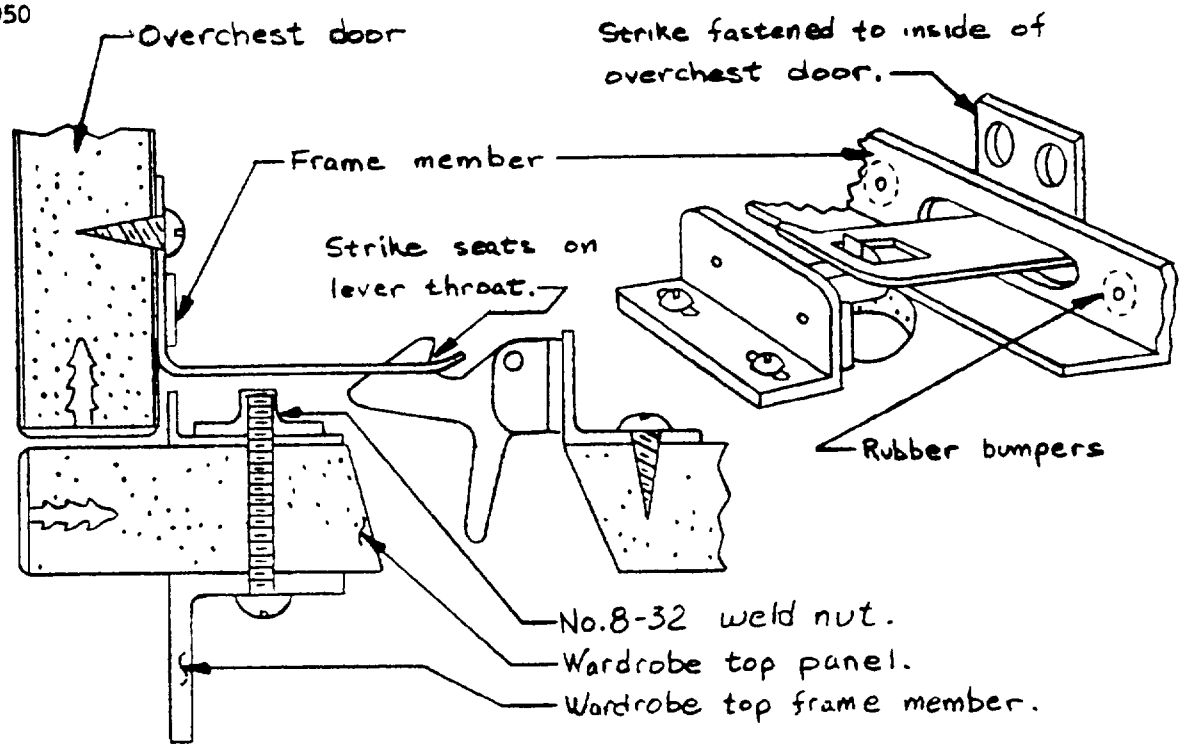


ELBOW CATCH AND STRIKE

NOT TO SCALE

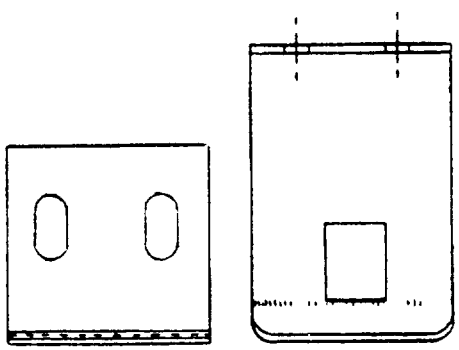

UPPER DOOR STRIKE 16 GA.

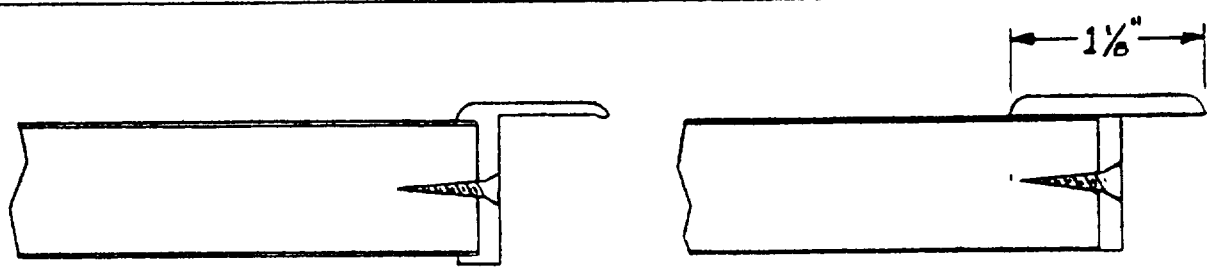

"L" Shape Aluminum Strip.

"Tee" Shape Aluminum Strip

ALUMINUM EXTRUSIONS NOT TO SCALE

Figure 8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

NOTE:
ALL STATIONARY PARTS TO BE SECURED TO DOOR WITH #12 RD HD. SHEET METAL SCREWS (EXCEPT AS NOTED)

FACE HARDWARE shall be satin chromium finish to match handle (see figure 9A).

LOCKING RODS shall engage ½ inch min.

DO NOT SCALE

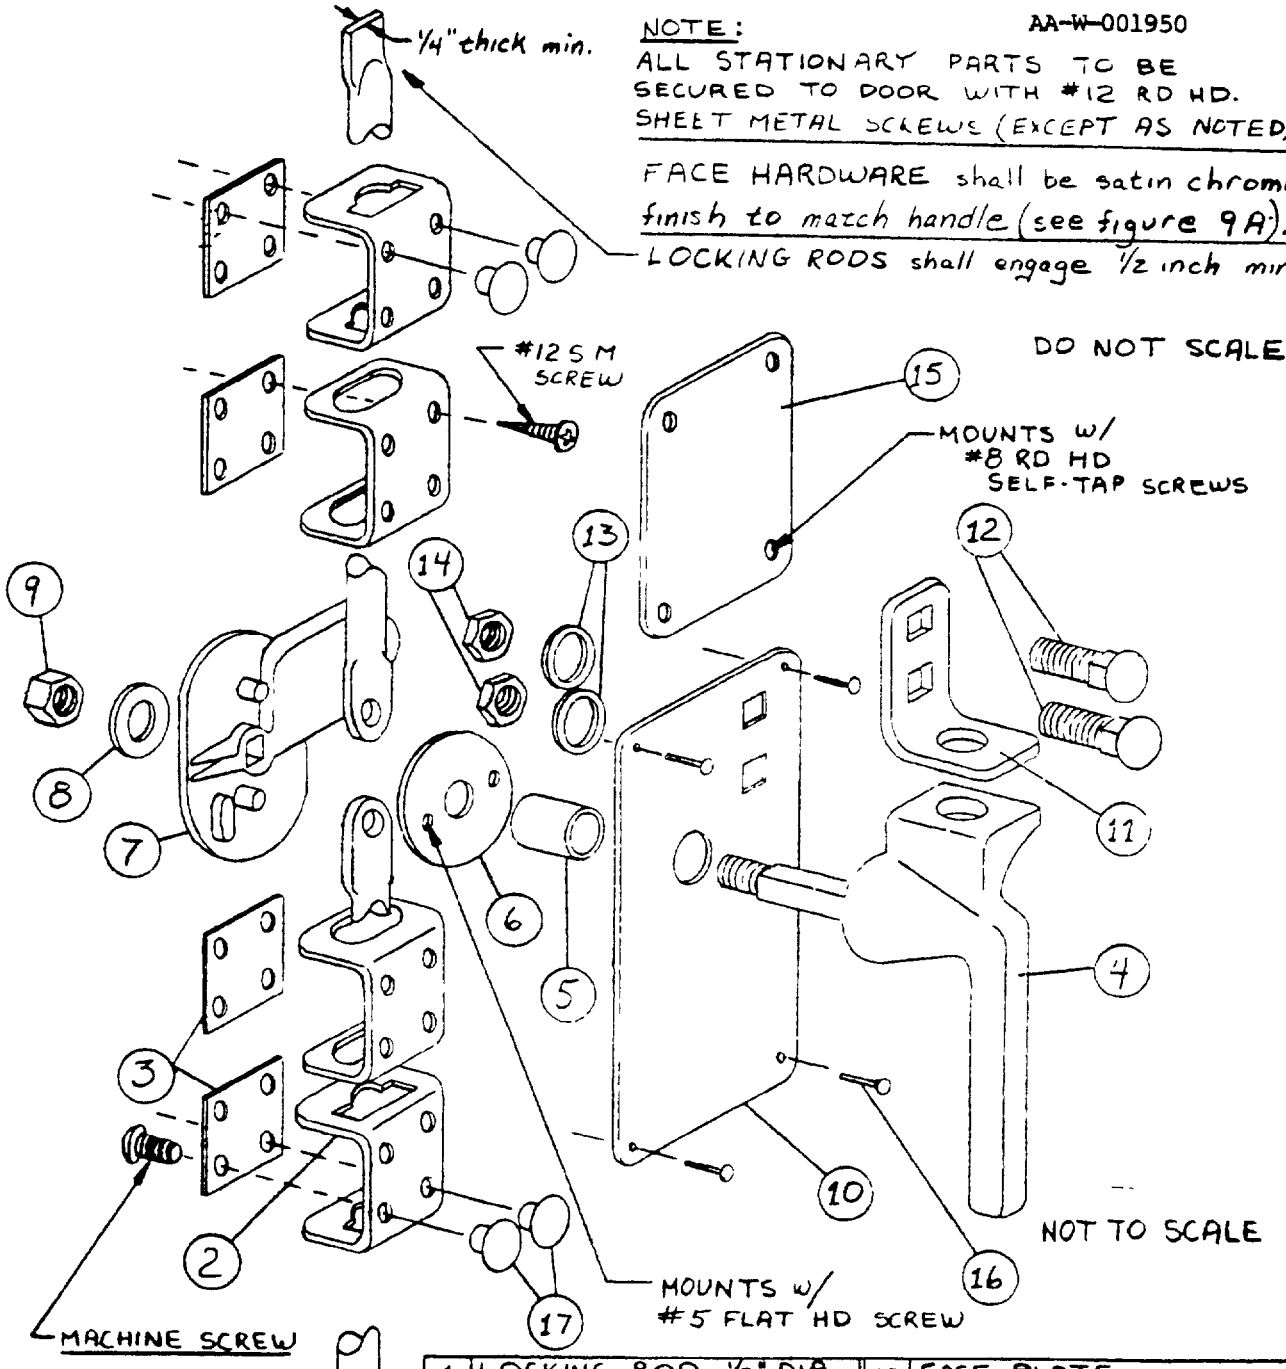


1	LOCKING ROD ½" DIA nickle plated	10	FACE PLATE
2	ROD GUIDES (4)	11	KEEPER (SEE FIGURE 9A)
3	PLASTIC INSERTS	12	CARRIAGE BOLTS (5/16-18X1 INCH)
4	HANDLE (SEE FIGURE 9A)	13	WASHERS
5	BUSHING	14	NUTS 5/16"-18 -(3/16" THICK)
6	BEARING PLATE	15	STRIKE PLATE (MOUNTS ON OPPOSITE DOOR)
7	3 FINGER CAM	16	4 PINS (5/8 INCH)
8	WASHER	17	CAPPED TEE NUTS (4) (SEE 2 2 9 10)
9	SPINDLE LOCK NUT (5/16")		

WARDROBE DOOR LOCKING ASSEMBLY

Figure 9

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

DO NOT SCALE

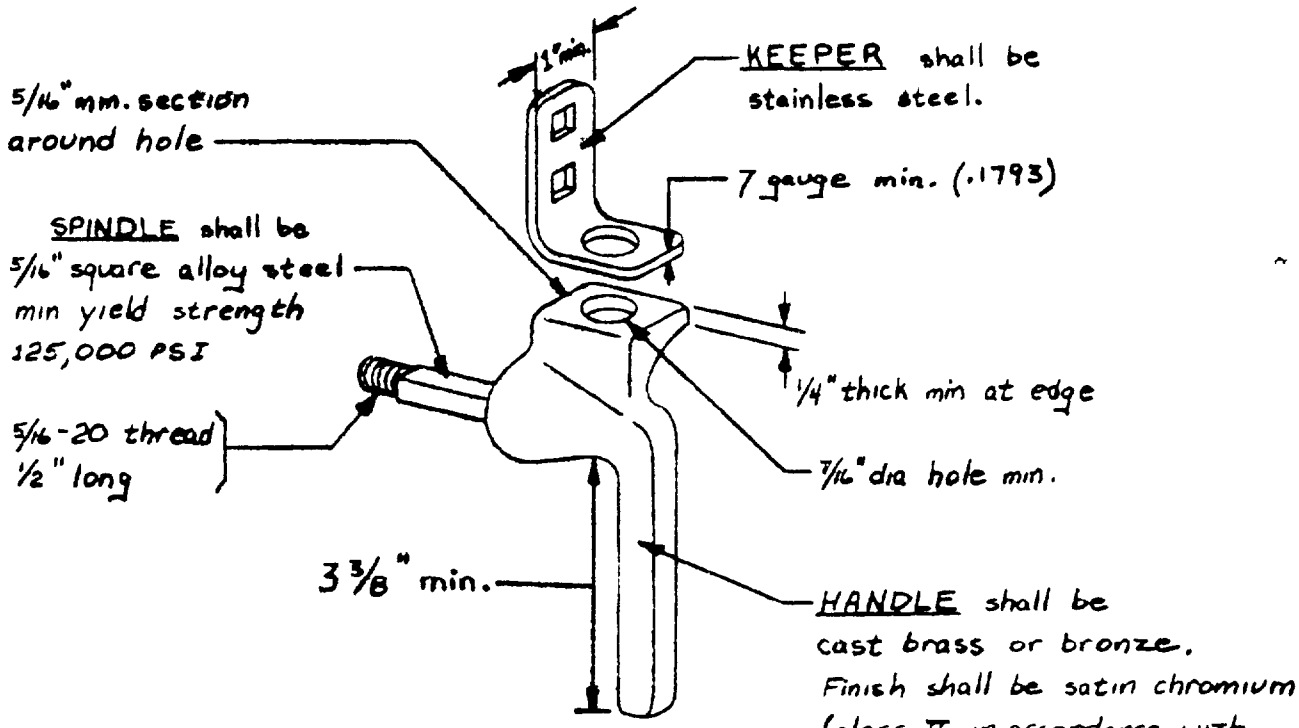


NOT TO SCALE

KEEPER AND HANDLE ASSEMBLY

FIGURE 9 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

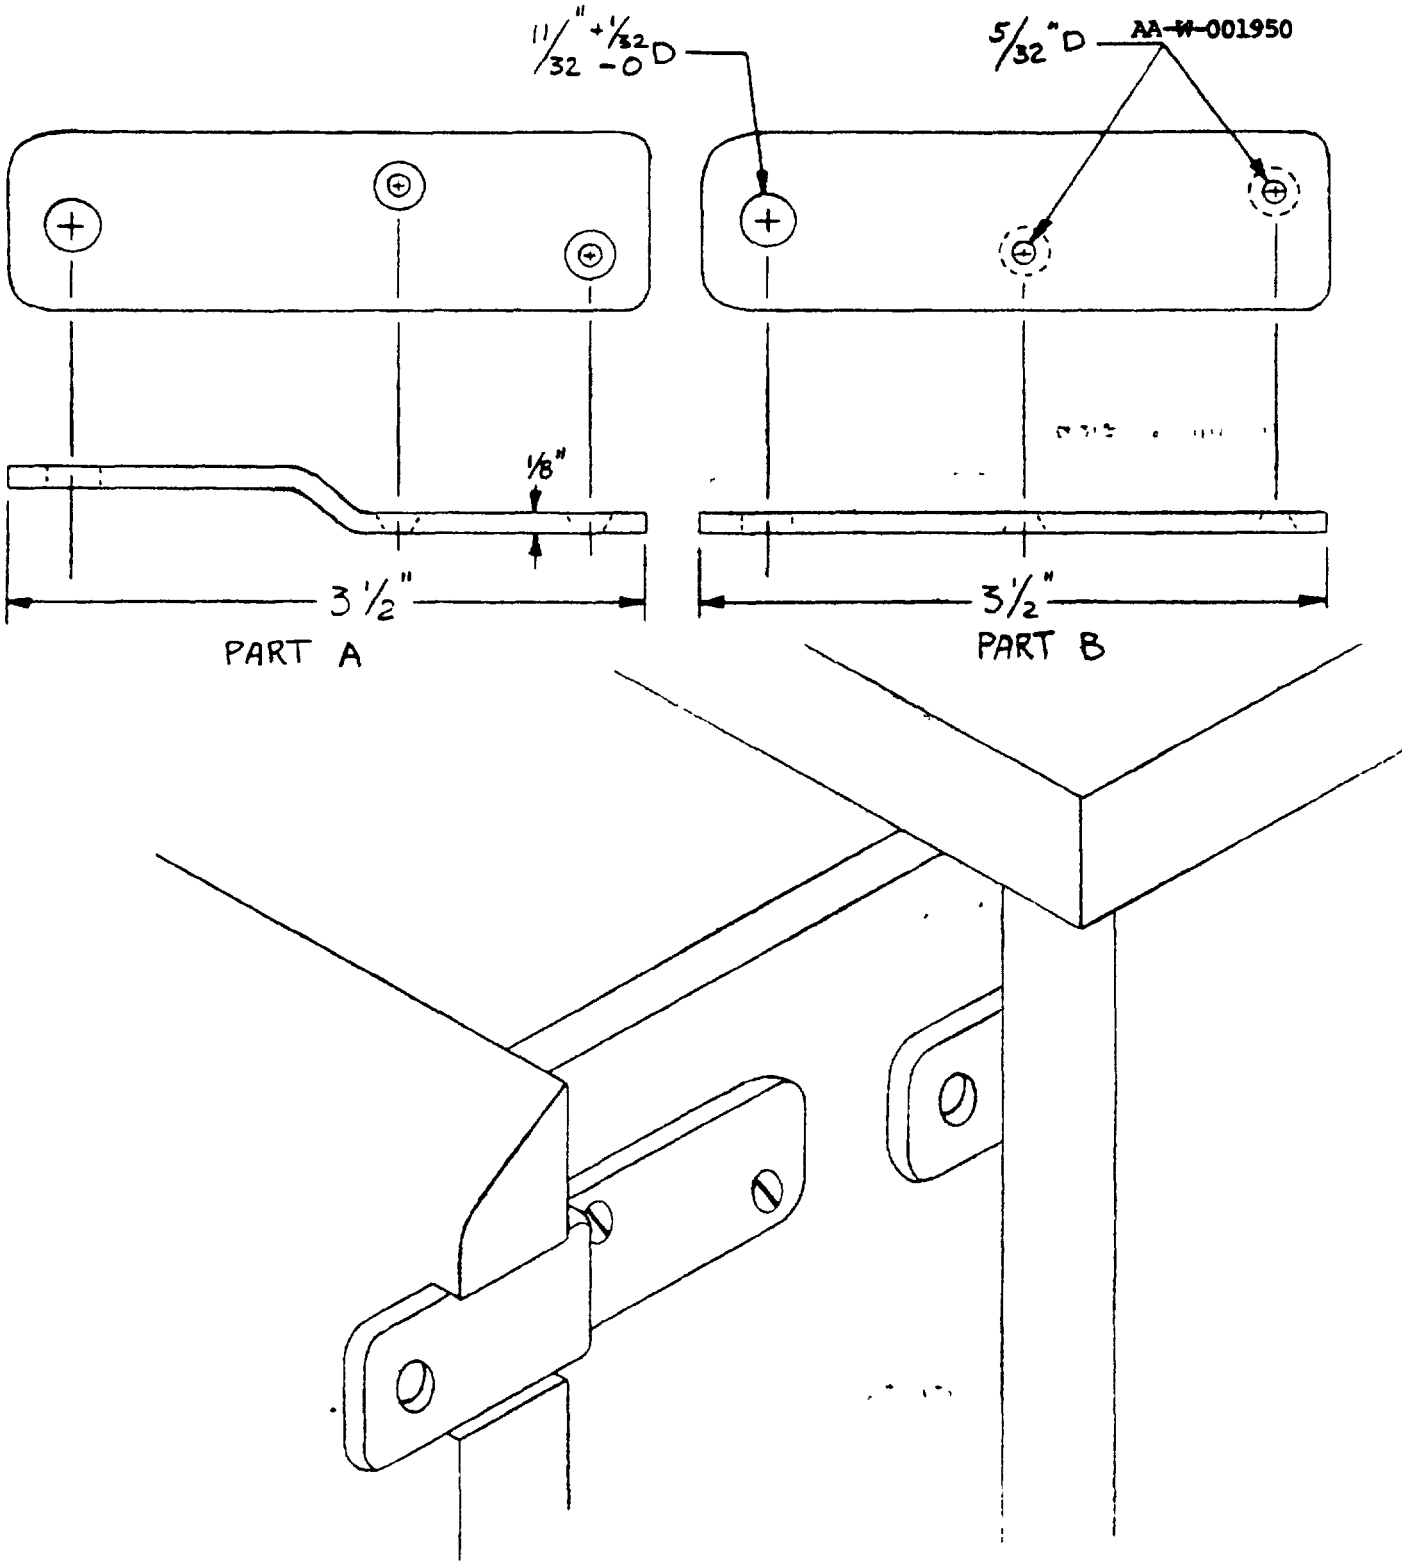


LOCKING HASP ON TOP DRAWER OF 3 DRAWER CHEST
NOT TO SCALE

FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Note: Clearance of 1/8 inch (plus 0, minus 1/32 inch) shall be provided around each drawer.

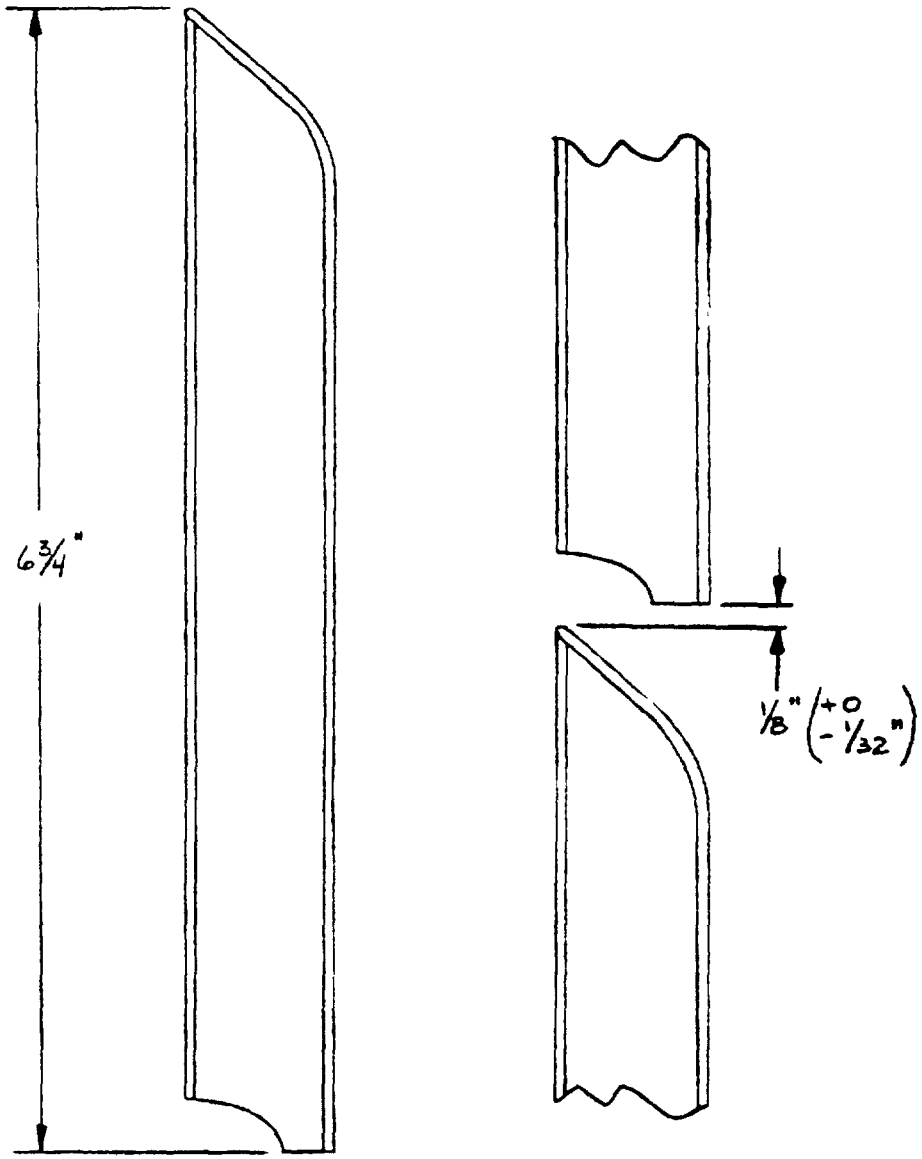


NOT TO SCALE

DRAWER FRONT CONFIGURATION FOR THREE DRAWER CHEST

Figure 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

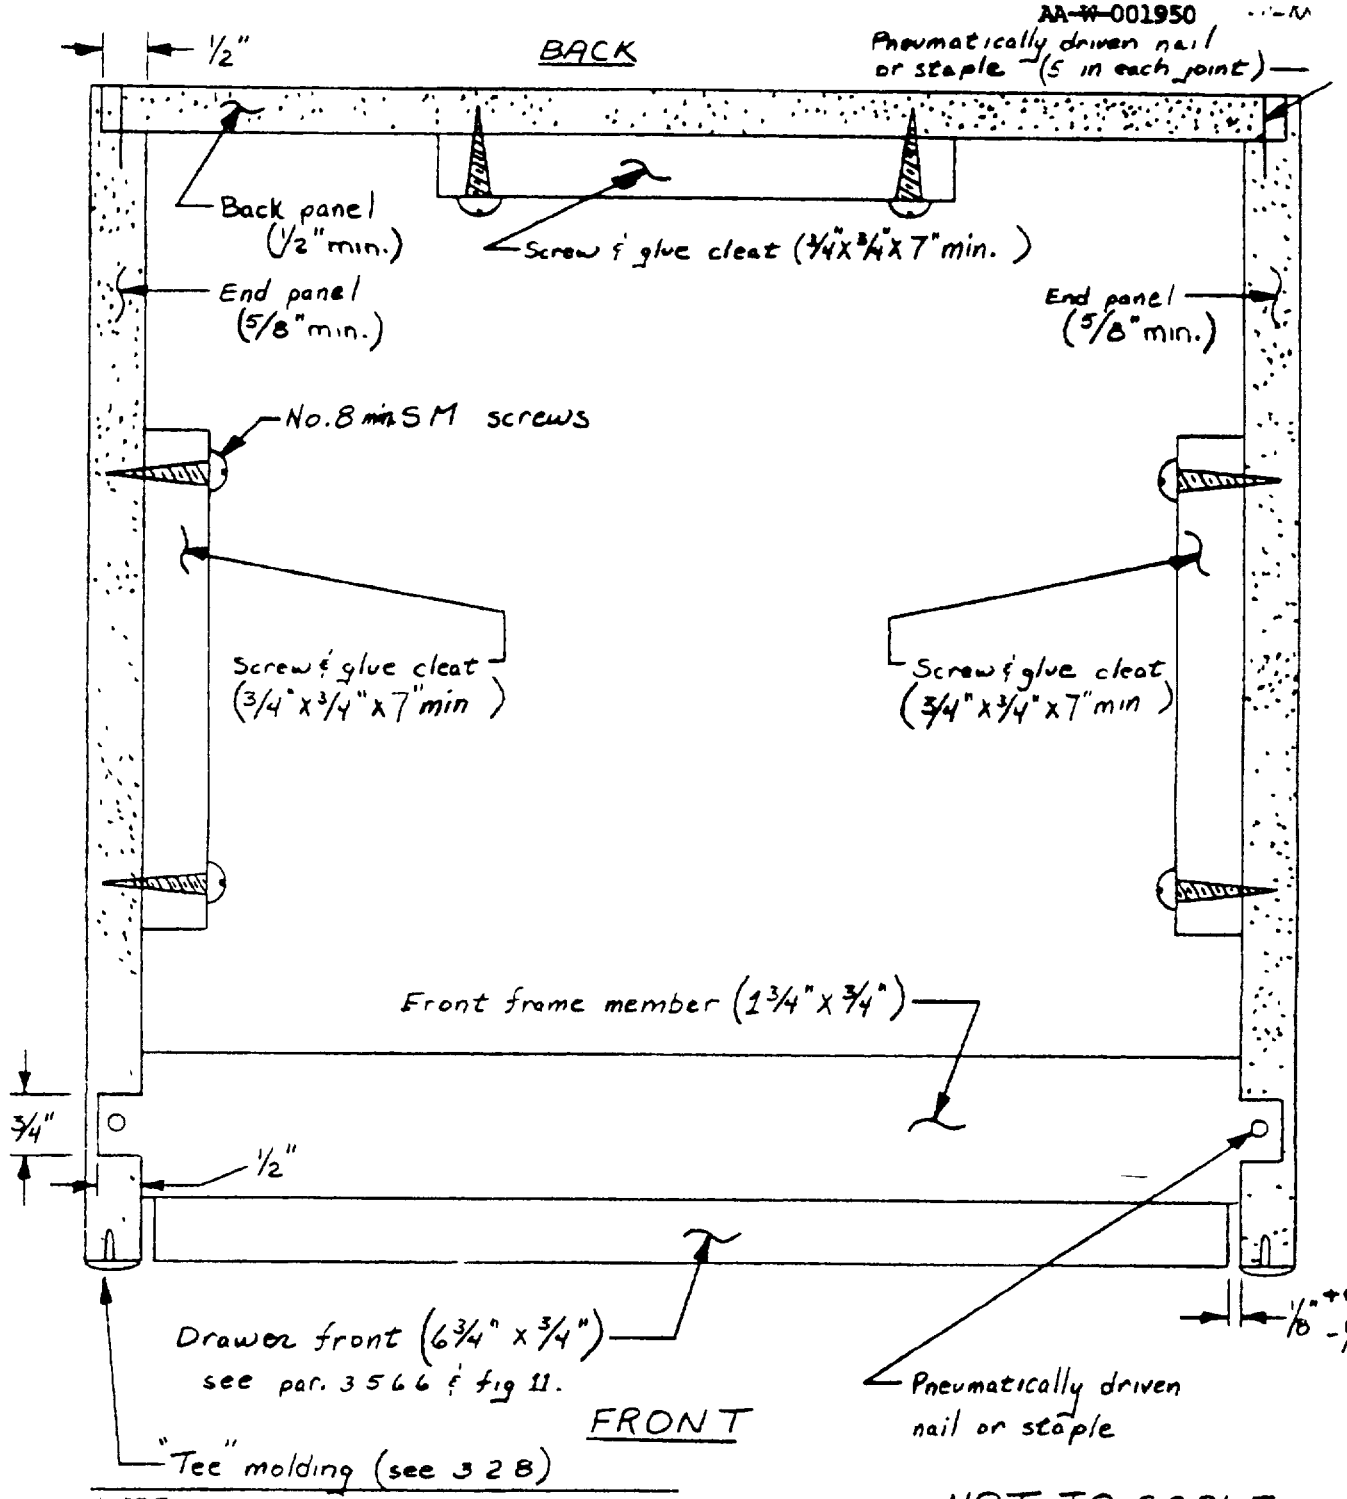

NOTE:


NOT TO SCALE

- Top secured to case through screw cleats and front frame member
- All joints shall be securely glued (3.2.6) and fastened as shown.
- All nails and staples shall be driven flush with surface.
- All fastening requirements are minimum.

3 DRAWER CHEST - TOP VIEW - ASSEMBLY METHOD 1

Figure 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

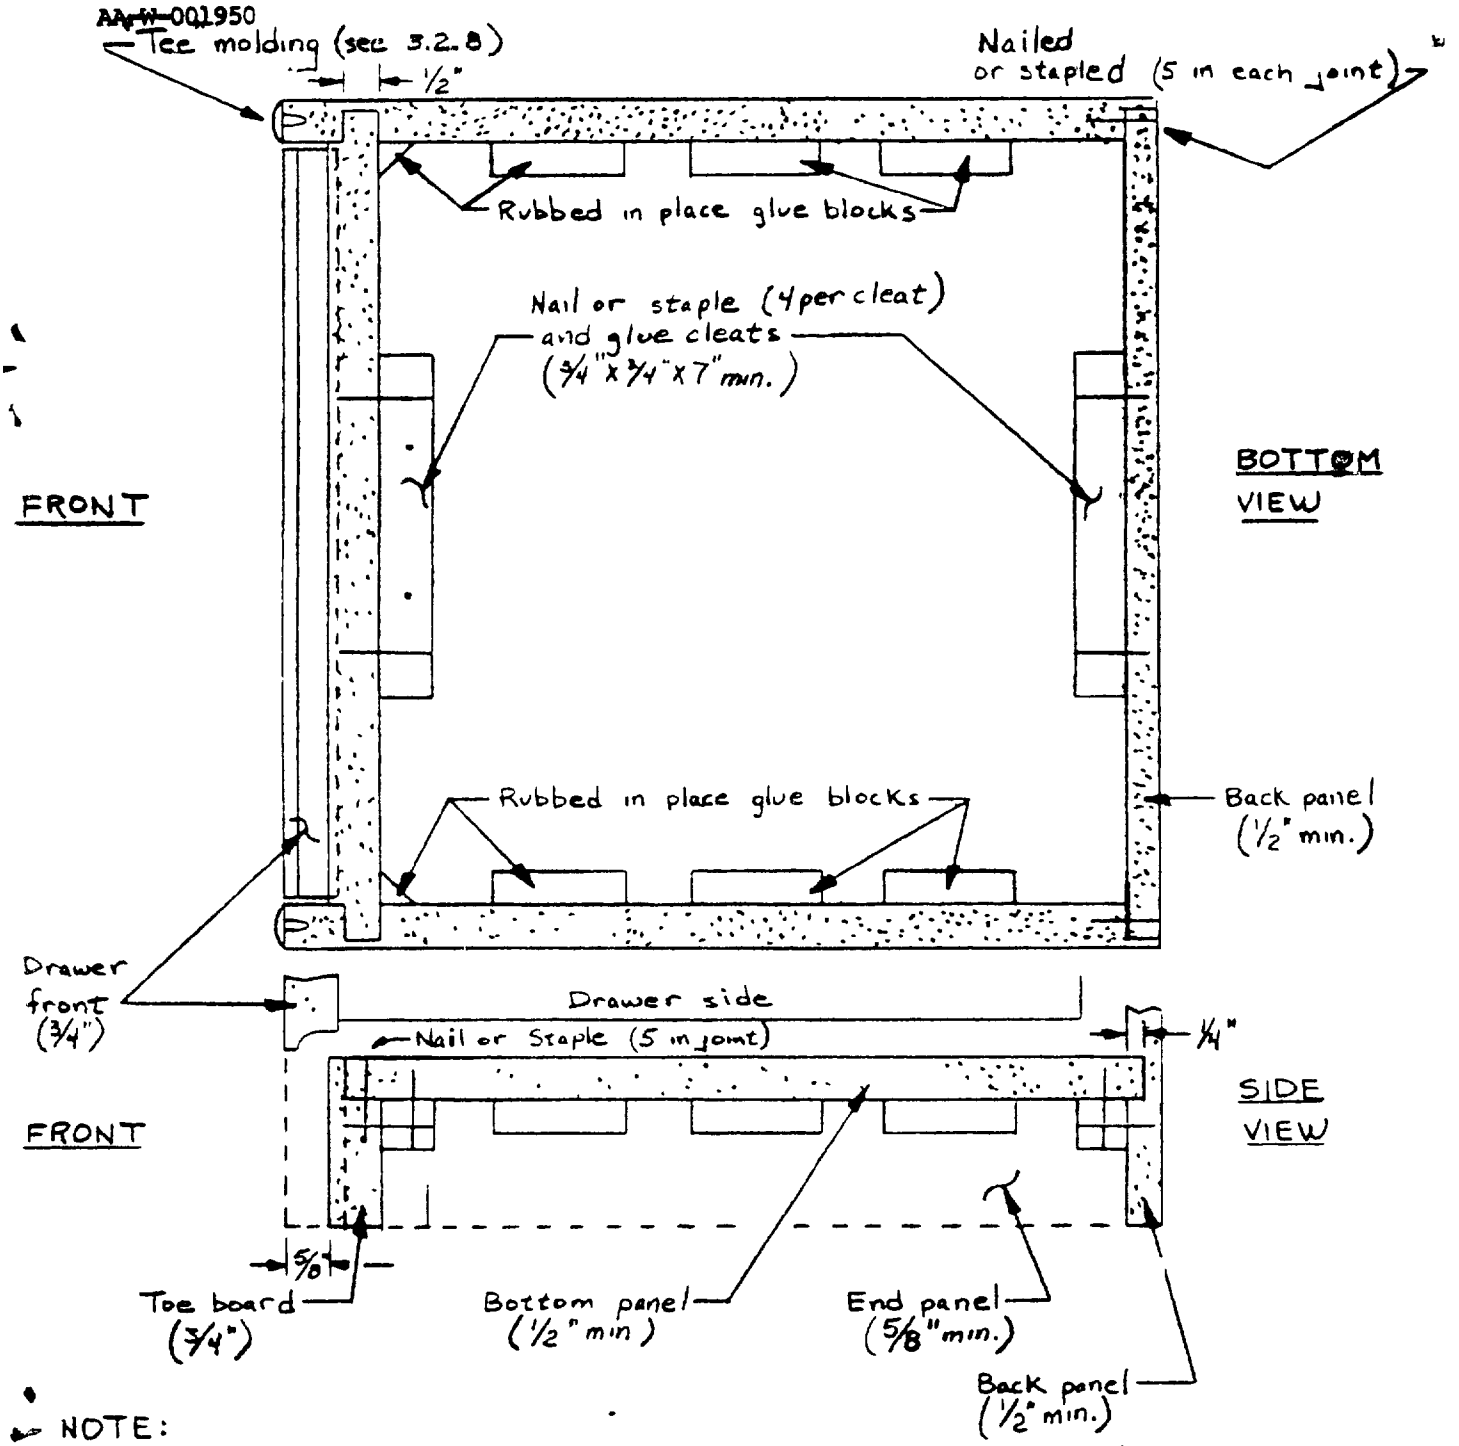

NOTE:

- All joints shall be securely glued (3 2.5) and fastened as shown.
- All fastening requirements are minimum.
- All nails and staples shall be flush with surface and pneumatically driven.


NOT TO SCALE

5 DRAWER CHEST - BOTTOM AND SIDE VIEWS

ASSEMBLY METHOD 1

Figure 13

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

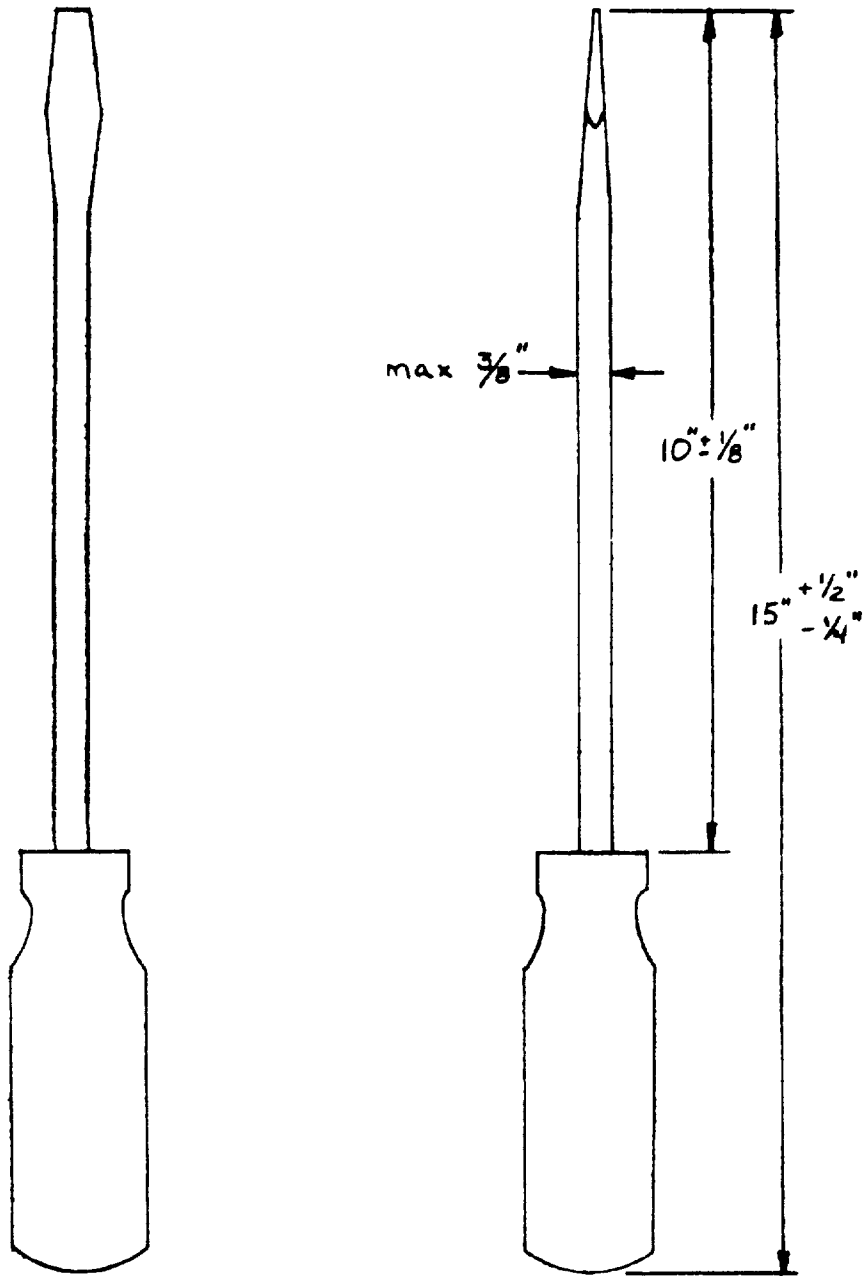

Forcible Entry Test Screwdriver

Figure 14 Not to scale

76-5361

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.