FF-C-82b
March 31, 1967
SUPERSEDING
Fed. Spec. FF-C-82a
June 27, 1963

FEDERAL SPECIFICATION

CASTERS, SWIVEL, CHAIR

This specification was approved by the Commissioner, Federal Supply Service. General Services Administration, for the use of all Federal agencies.

1 SCOPE AND CLASSIFICATION

1 1 Scope. This specification covers swivel casters for metal and wood chairs.

1.2 Classification

1.2.1 Types, styles, sizes, and wheel material. Casters should be of the following types, styles, sizes, and wheel materials as specified (see 6.2)

Type I—Caster, ball-bearing swivel, metal chair

Style a—Stem and socket
Style b—Threaded stem
Style c—Flat top plate

Type II—Caster. top-bearing, swivel. metal chair

Type III—Caster, ball-bearing swivel. wood chair

Size A—1⅝-inch or 1¾-inch diameter wheel
Size B—2-inch diameter wheel

Material 1—Hard-rubber composition wheel with soft rubber tread (nonmarking)

Material 2—Hard-rubber composition wheel

Material 3—Hard-phenolic composition wheel (nonmarking).

2. APPLICABLE DOCUMENTS

2 1 The following specifications and standards of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications

PPP-B-566—Boxes, Folding, Paperboard.

PPP-B-636 Box, Fiberboard

PPP-B-665 Boxes, Paperboard, Metal Stayed (Including Stay Material)

PPP-B-676- Boxes, Setup

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 601—Rubber: Sampling and Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C 20402

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL–M–14—Molding Plastics and Molded Plastic Parts, Thermosetting

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes

MIL–STD–129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS.

3.1 Preproduction sample When specified (see 6.2), before production is commenced, a sample of the caster covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product. It is intended that the casters covered by this specification shall be standard commercial products of the manufacturer except for changes necessary to conform to the requirements specified herein.

3.3 Materials Materials shall conform to the requirements specified herein Materials not definitely specified shall be of the composition and quality used in current industry practice

3.4 Design and construction. Design and construction shall be as specified herein in accordance with the applicable type, style, size and wheel material required and the dimensions shown on the applicable figure (see 1.2 and figures 1 through 3.)

3.1.1 Wheels

3.1.1.1 Wheel sizes. Size A wheels shall have a nominal diameter of 1¾ inches or 1¾ inches, whichever is the manufacturer's standard size Intermixing of both of the foregoing nominal sizes is not permitted. Size B wheels shall have a nominal diameter of 2 inches Size A wheels shall have a minimum tread thickness of $^3/_{16}$ inch. Size B wheels shall have a minimum tread thickness of $^1/_4$ inch The tread thickness shall be determined at four points equally spaced around the wheel and shall be measured at the center of the tread. At least two of the measurements shall be not less than the minimum thickness, and no measurement shall be less than 65 percent of the nominal thickness The core shall be hard-rubber composition that meets the tensile strength, elongation, and durometer-hardness requirement specified in 3.1.1.3. The adhesion between the tread and the core shall be not less than 50 pounds per inch of width when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

3.4.1.2 Material 1 wheels. Material 1 wheels shall consist of a hard-rubber composition core with a securely attached self-lubricating type bearing and an integrally bonded nonmarking soft-rubber tread. Testing for floor-marking shall be in accordance with 4.4.2. When tested as specified in 4.4.1, the soft-rubber tread shall meet the following physical requirements:

Shore A Durometer hardness range (at 70° F.)	70–85
Tensile strength, minimum, p.s.i.	1500
Ultimate elongation, minimum, percent	250

3.4.1.3 Material 2 wheels. Material 2 wheels shall consist of all hard-rubber composition having a fibrous content, and be a nonmarking tread type. Testing for marking shall be in accordance with 4.4.2. The wheels shall have self-lubricating-type bearings and be securely attached. When tested as specified in 4.4.1, the hard-rubber composition shall meet the following physical requirements:

Shore D Durometer hardness range (at 70° F.)	75–85
Tensile strength, minimum, p.s.i.	2500
Ultimate elongation, minimum, percent	1.5

3.4.1.4 Material 3 wheels. Material 3 wheels shall consist of all hard-phenolic (nonmarking) composition with a graphite-impregnated hub-type bearing or a securely attached self-lubricating bearing. The phenolic composition shall conform to type CFG of MIL–M–14. Testing for floor marking shall be in accordance with 4.4.2.

3.4.2 Axles. All axles shall be made of cold-drawn steel, not less than $^{7}/_{32}$ inch in diameter for the 1⅝- or 1¾-inch-diameter wheels, and not less than ¼ inch in diameter for the 2-inch diameter wheels. Axles shall be of the bolt and nut type or the solid rivet type Axles shall be securely mounted in the yoke or horn in such a manner as to prevent loosening or turning of axles, or binding of the wheels.

3.4.3 Swivels. Swivels shall include protective ball raceways where ball bearings are required. Construction shall be such that in swiveling under load all forces exerted between the horn and the means of attachment are transmitted through the ball bearings. The swivel parts of the caster, if formed of stamped steel, shall be carburized or casehardened to a depth of not less than 0.005 inch, nor more than 0.010 inch. Drop-forged horns forming the outer swiveling part shall be casehardened all over, as well as the inner swiveling parts, which shall be formed from steel bars

3.4.4 Ball bearings Ball bearings used in the raceway shall be of case-hardened and ground steel. Ball bearing diameters shall be accurate within a tolerance of plus or minus 0.002 inch and spherical within plus or minus 0.001 inch Work-hardened ball bearings are not acceptable. The diameter of the balls shall not be less than $^{3}/_{16}$ inch for single raceway swivels. For double or two level raceway swivels, the balls carrying the load shall not be less than $^{3}/_{16}$-inch diameter and those taking the thrust not less than $^{5}/_{32}$-inch diameter.

3.4.5 Yokes or horns

3.4.5.1 Type I and type III. The yoke or horn for type I and type III casters shall be made of carburized or casehardened steel of not less than 0.072 inch in thickness, suitably embossed, ribbed, or formed to provide ample strength The carburizing or casehardening shall be to a depth of not less than 0.005 inch, nor more than 0.010 inch

3.4.5.2 Type II. The yoke or horn for type II casters shall be fabricated of steel, not less than 0.093 inch thick

3.4.6 Stems.

3.4.6.1 Type I, style a caster stems. Stems for type I, style a casters shall be made of cold-drawn steel and shall be a length to fit the corresponding sockets. Stems shall be not less than $^{7}/_{16}$-inch diameter unless a $^{3}/_{8}$-inch diameter is specified (see 6.2). The stem shall be constructed to permit a secure

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:44Z
Check the source to verify that this is the currentversion before use.

grip by the holding part of the socket. When the stem is equipped with its own holding device, the device shall be separate, made from spring material and constructed so as to prevent the casters from falling out of the sockets. The stem shall be permanently fastened in the swivel head of the caster in such a manner that the yoke or horn shall rotate independently of the stem when the caster is swiveling.

3.4.6.2 Type I, style b caster stems. Stems for type I, style b casters shall be made of cold-drawn steel. Stem length, stem diameter, and threads per inch shall be as specified (see 6.2). When specified (see 6.2), threaded stems shall be provided with hexagonal nuts. Threaded stems shall be permanently fastened in the swivel head of the caster in such a manner that the horn or yoke shall rotate independently of the stem when the caster is swiveling.

3.4.6.3 Type II caster stems. Stems for type II casters shall be made of cold-drawn steel. Stem lengths shall vary to fit the corresponding socket. Stems shall be not less than 7/16-inch diameter unless a 3/8-inch diameter is specified (see 6.2). The stem shall be constructed so as to permit a secure grip by the holding part of the socket and shall engage in top or pivot bearing contact with the socket. When the stem is equipped with its own holding device, the device shall be separate and made of spring material. The holding device shall be constructed to prevent the caster from falling out of the socket, and to permit free swiveling under load.

3.4.6.4 Type III caster stems. Stems for type III casters shall be made of cold-drawn steel. The stems shall be of the proper size and standard length to fit the corresponding socket, and shall be constructed to permit a positive grip by the holding part of the socket Stems shall be interchangeable with all standard shapes of grip-neck sockets. The stem shall be permanently fastened in the swivel head of the caster so that the yoke or horn shall rotate independently when the caster is swiveling. In lieu of the stem and socket design, a straight knurled or serrated stem may be provided as follows:

1. Stem—Main body diameter shall be 3/8 inch

2. Knurl or serration

   a. Length: 7/16 inch, 1 1/16 inch

   b. Location: Centered along stem length to within 1 1/16 inch

3.4.7 Flat top plate. Type I, style c casters shall have a flat top steel plate. The dimensions of the top plate shall conform to figure 1. The plate shall be permanently fastened in the swivel head of the caster so that the yoke or horn will rotate independently of the top plate when the caster is swiveling.

3.4.8 Sockets.

3.4.8.1 Type I, style a, and type II caster sockets. The sockets for type I, style a and type II casters shall be designed to be a permanently fabricated part of the caster or a separately inserted unit, made of steel, cast iron, or die casting. When a separate socket is used, it shall be made of stamped steel, constructed to provide for either a drive fit or attachment by welding. Where the socket provides the means for holding and retaining the caster stem, the holding device shall be separate and made of spring material.

3.4.8.2 Type III caster sockets. The sockets for type III casters shall be made of steel, commercially constructed to hold the stem securely in place and to prevent the caster from falling out The socket shall be of such size as to fit into a leg bore of 3/8-inch diameter by 1 1/2 inches deep Sockets shall be constructed to receive stems fabricated in accordance with dimensions shown on figures 1, 2 and 3

3.5 Finish.

3.5.1 Caster yokes or horns. Sheet-steel yokes or horns shall have one of the following finishes as specified (see 6.2): Copper oxidized, cadmium plated, zinc plated, nickel plated or chrome plated. Unless otherwise specified (see 6.2), drop-forged yokes or horns shall have a black baked finish

3.5.2 Stems and sockets. Stems and sockets shall be made rust resistant by electrogalvanizing, zinc plating, cadmium plating, or nickel plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

3.5.3 Axles and nuts. Axles and nuts shall be finished to correspond with the finish specified for caster yokes or horns except when nickel or chrome plating is required The axles and nuts may be cadmium plated or zinc plated in lieu of plating specified.

3.6 Marking for identification. Each caster yoke or horn shall be marked with the manufacturer's identification in a plain and permanent manner so that the source of manufacture may be readily determined.

3.7 Workmanship. The finished caster shall be clean and free from sharp edges, burrs, or splinters. All finished surfaces shall be free from areas of no coating, evidence of inadherence, or presence of rust.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample When a preproduction sample is required, it shall be examined for defects listed in table I, dimensions specified, and tested as specified in 4.4 1

4.3 Sampling for inspection Sampling for inspection shall be made in accordance with the provisions set forth in MIL–STD–105, except where otherwise indicated

4.3.1 Component and material inspection. In accordance with 4 1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1 1 Component testing. The rubber treads shall be tested as specified in 4 4 1 for compliance with 3.4.1.1, 3.4.1.2 and 3.4 1.3 The lot shall consist of all treads of one type and size offered for inspection at one time. The sample unit shall be one completely fabricated rubber tread The inspection level shall be S–2 with an AQL of 2.5 defects expressed in terms of defects per hundred units.

4 3.2 End item inspection The inspection lot shall consist of all casters of the same type, style, size, and material offered for inspection at one time. The sample unit shall be one complete caster.

4 3.2.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects in table I The inspection level shall be level II with an AQL of 2 5 for major and 6.5 for total defects, expressed in terms of defects per hundred units

Table I Classification of defects, end item

Examine	Defect	Classification	
		Major	Minor
Finish	Type of finish not as specified		X
Construction and workmanship. (applicable to all components and assemblies)	Area of no coating not adherent or presence of rust		X
	Any part missing or not specified type or size	X	
	Fractured, split torn, chipped, dented, deteriorated, malformed, or stripped	X	
	Misplaced, loose, or not in proper alignment	X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:44Z
Check the source to verify that this is the current version before use.

Table I. Classification of defects, end item (cont'd.)

Examine	Defect	Classification	
		Major	Minor
Construction and workmanship general (applicable to all components and assemblies) (cont'd.)	Any operation missing or not properly performed	X	
	Any functioning component that is inoperative or will not operate as intended, e.g., wheel will not rotate	X	
	Any functioning component that requires abnormal force to operate e.g., wheel binds slightly at axle hole boss		X
	Axle turns in yoke or horn when wheel is rotated	X	
	Any component not connected or joined as specified or poorly accomplished	X	
	Any bearing not as specified		X
	Not clean, or free of rust, not free from sharp edges, burrs, or slivers	X	
Marking	Missing, incomplete, illegible or not permanent		X

4.3.2.2 Dimensional examination. An examination shall be made of the casters for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units

4.3.2.3 Testing of the end item. End item testing in accordance with 4.4.1 and 4.4.2 as applicable shall be performed in accordance with table II. AQL's are expressed in terms of defects per hundred units.

Table II. End item testing

Characteristic	Requirement paragraph	Requirements applicable to Ind. unit	Sample unit	Inspection level	AQL
Adhesion	3.4.1.2	X	1 caster	S-2	6.5
Floor Marking	3.4.1.2 3.4.1.3 3.4.1.4	X	4 casters assembled to chair	S-2	6.5

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that preservation and packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored as specified in table III The sample unit shall be one container fully prepared for inspection The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:44Z
Check the source to verify that this is the currentversion before use.

Table III. Examination of preparation for delivery

Examine	Defect
Markings	Omitted; incorrect, illegible; of improper size, location, sequence or method of application.
Preservation	Preservative improperly applied or missing.
Materials	Component missing or damaged
Workmanship	Loose steel strapping or tape banding; blocking or cushioning inadequate, improper or missing
Contents	More or less than required.

4.4 Tests.

4.4.1 Test methods. As listed in table IV, the test methods of Fed. Test Method Std. No. 601 shall be used to determine conformance with the requirements as indicated.

Table IV. Test methods

Characteristic	Method	Requirement paragraph
Durometer hardness	3021	3.4.1.2 and 3.4.1.3
Tensile strength (soft rubber)	4111	3.4.1.2
Elongation (soft rubber)	4121	3.4.1.2
Adhesion	8011	3.4.1.1
Tensile strength (hard rubber)	11011	3.4.1.2 and 3.4.1.3
Elongation (hard rubber)	11021	3.4.1.2 and 3.4.1.3

4.4.2 Floor marking. The plastic wheel and rubber treaded wheel shall be tested for floor marking as follows: A test chair shall be equipped with four swivel casters of the same size and class The chair shall be loaded with weights (equally distributed) equal to four times the load rating of the individual wheel less the weight of the chair. The chair shall be moved back and forth six revolutions of the wheel in each direction (one cycle) on a smooth concrete or hardwood surface at the rate of 4 m.p.h., minimum, for 6 cycles, after which the floor surface shall be inspected to determine conformance with 3.4.1.2, 3.4.1.3 and 3.4.1.4, respectively. Failure of any one caster shall be a defect.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Preservation. Casters having ball bearings, shall be lubricated with the manufacturer's recommended lubricant containing a rust inhibitor (see 6.4).

5.1.1.2 Packaging. Four casters of one type, style, size and material only, preserved as specified in 5.1.1.1 if applicable, shall be packaged in the most compact manner in a snug fitting folding, setup, or metal-stayed paperboard box conforming to PPP-566, PPP-B-676 or PPP-B-665, respectively. Closure shall be in accordance with the applicable box specification or appendix thereto.

5.1.2 Level C. Four casters of one type, style, size and material only, shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. A quantity not to exceed 96 casters (24 unit packages), (see 6.2) of one type, style, size and material only, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of the container specification.

5.2.2 Level B. A quantity not to exceed 96 casters (24 unit packages) (see 6.2), of one type, style, size and material only, preserved and packaged as specified in 5.1, shall be packed, unless otherwise specified (see 5.2.2.1), in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636 Closure shall be in accordance with method II of the appendix of the container specification.

5.2.2.1 When specified (see 6.2), weather-resistant fiberboard specified in 5.2.1, shall be used for the shipping container.

5.2.3 Level C. Casters, preserved and packaged as specified in 5.1 shall be packed to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking

5.3.1 Civil agencies In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed Std No 123.

5.3.2 Military activities. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The casters covered by this specification are primarily intended for use on office and typist chairs. Size A or B casters should be specified for typist chairs. Size B casters should be specified for office chairs. Hard tread wheels are usually required for carpeted floors. Soft tread wheels are used for linoleum, tile, smooth cement and wood floors

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification

(b) Type, style, size, and wheel material required (see 1.2 and figures 1 through 3).

(c) When preproduction sample is required (see 3.1)

(d) State diameter of socket for type I, style a caster or type II caster if applicable (see figure 1 and 2).

(e) If ⅜-inch diameter stems are required for type I, style a or type II casters, (see 3.4.6.1 and 3.4.6.3).

(f) State stem length, stem diameter and threads per inch for type I, style b caster, also specify whether hexagonal nuts shall be furnished (see 3.1.6.2 and figure 1)

(g) When flat top plate dimensions are to be other than as specified for type I, style c casters if applicable (see figure 1 and 6.3).

(h) Type of finish required for sheet steel yokes or horns if other than specified (see 3.5.1)

(i) Type of finish required for drop forged yokes or horns if other than as specified (3.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

(j) Selection of applicable levels of preservation and packaging, and packing (5.1 and 5.2).

(k) Whether quantity of casters per pack shall be 96 or less (see 5.2.1 and 5.2.2).

(l) If weather-resistant fiberboard is required for level B packing (see 5.2.2.1).

6.3 When type I, style c (flat top plate) casters are required, note carefully whether dimensions of the plate and mounting holes shown on figure 1 are compatible with the chair leg or item on which it is to be attached. If not compatible, determine specific dimension requirements.

6.4 Preservation The method of preservation referred to in 5.1.1.1, is similar to method I of MIL–P–116.

6.5 For civil agency procurement. When level B packaging is required for civil agency procurement, the level A requirements in 5.1.1 shall apply.

MILITARY CUSTODIANS:
Army—GL
Navy—YD
Air Force—69

Review activities:
Navy—YD
Air Force—69


User activities.
Army—MD, MO
Navy—MC

Preparing activity·
Army—GL


Civil agencies interest
GSA–FSS
VA–
INT–
HEW–
COM–NBS
AGR–

Review and User information is current as of the date of this document For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

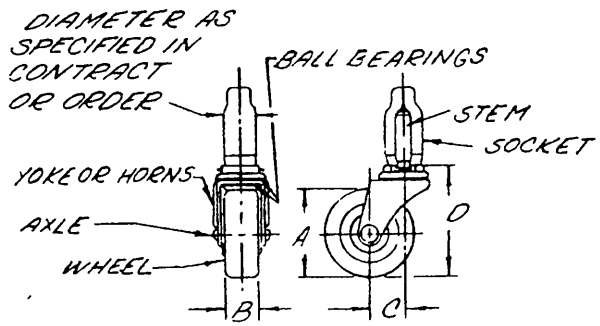

STYLE a
STEM AND SOCKET

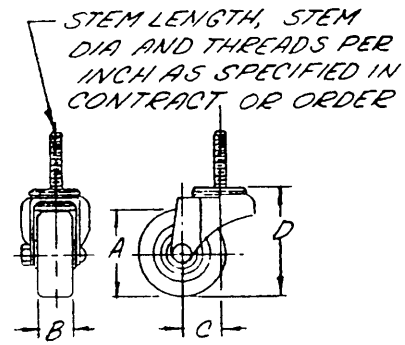

STYLE b
THREADED STEM

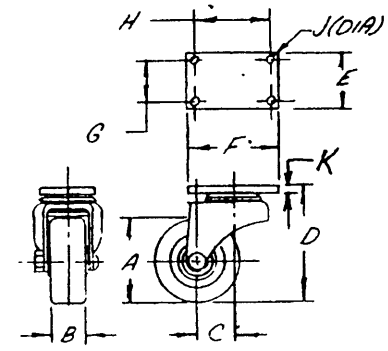

STYLE C
FLAT TOP PLATE


NOTE.
DIMENSIONS E THRU J" SHALL NOT APPLY IF SPECIFIC DIMENSIONAL REQUIREMENTS ARE OTHERWISE SPECIFIED IN THE CONTRACT OR ORDER.

TYPE I CASTER, BALL BEARING SWIVEL, METAL CHAIR

STYLE	SIZE	A	B MIN	C MIN	D MAX	E MAX	F MAX	G ±.010	H ±.010	J +1/32 -0	K ±1/32
a	A	1 5/8 OR 1 3/4	23/32	3/4	2 5/8						
	B	2	25/32	13/16	3						
b	A	1 5/8 OR 1 3/4	23/32	3/4	2 3/8						
	B	2	25/32	13/16	3						
c	A	1 5/8 OR 1 3/4	23/32	3/4	2 3/8	1 1/4	2 3/8	13/16	1 9/16	3/16	1/8
	B	2	25/32	13/16	3	1 1/4	2 3/8	13/16	1 9/16	3/16	1/8

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:44Z
Check the source to verify that this is the current version before use.

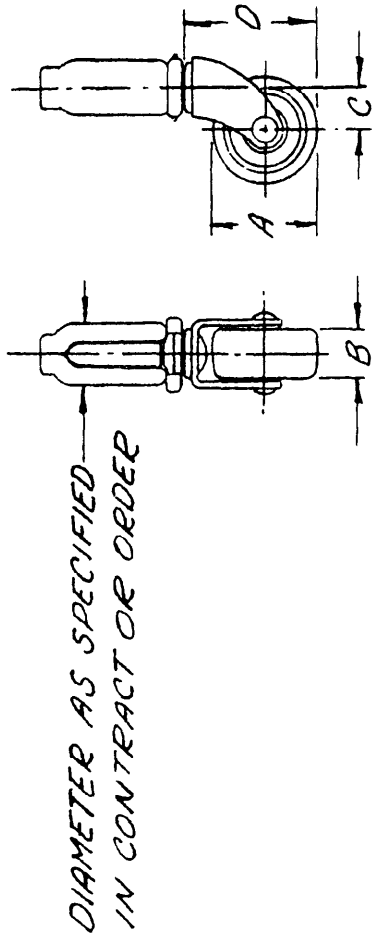


TYPE II CASTER, TOP BEARING SWIVEL, METAL CHAIR

SIZE	A	B MIN	C MIN	D MAX
A	1 3/8 OR 1 3/4	23/32	19/32	2 5/16
B	2	25/32	11/16	2 11/16

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

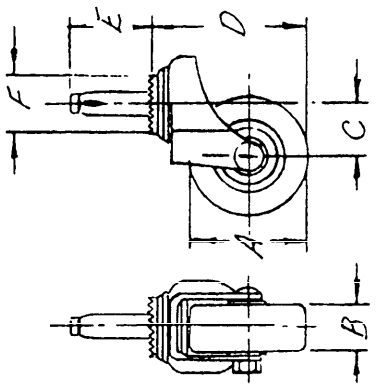

TYPE III CASTER, BALL BEARING SWIVEL, WOOD CHAIR

SIZE	A	B MIN.	C MIN	D MAX.	E NOM.	F MIN.
A	1 5/8 OR 1 3/4	23/32	3/4	2 5/8	1 7/16	1
B	2	25/32	13/16	3	1 7/16	1

FIGURE 3

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each

☆ U. S. GOVERNMENT PRINTING OFFICE: 1967 O - 252 511 (252)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity

SPECIFICATION

Casters, Swivel, Chair - FF-C-82b

ORGANIZATION	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1426

To detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:44Z
Check the source to verify that this is the current version before use.