FF–T–77
SEPTEMBER 14, 1953
SUPERSEDING
FF–K–231 (Navy Ships)
Int. Fed. Spec.
14 November 1951

FEDERAL SPECIFICATION

TAG AND HOLDER, KEY

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers key tags and key holders for key cabinet indexing systems.

1.2 Classification.

1.2.1 *Types.*—Key tags and key holders covered by this specification shall be of the following types, as specified (see 6.1):

Type A.—File key tag (natural color).
Type B.—Working key tag (red color).

1.2.2 *Classes.*—Key tags and key holders shall be of the following classes, as specified (see 6.1).

Class 1.—Engraved, indented, or stamped.
Class 2.—Blank.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specification and standard, of the issue in effect on date of invitation for bids, form a part of this specification:

Military Specification:

JAN–F–1148—Fiber, Insulating.

Military Standard:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Federal Specifications and the Index of Federal Specifications and Standards may be obtained upon application accompanied by check, money order, cash, or Government Printing Office coupons, to the General Services Administration, Business Service Center, Region 3, Seventh and D Streets, SW., Washington 25, D. C. This office will also honor deposit account numbers issued by the Government Printing Office. Prices may be obtained from the Index of Federal Specifications and Standards or from the GSA Regional Offices. Single copies of this specification and other product specifications required for bidding purposes are available without charge at the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Specifications and standards applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.

3.1.1 *Key tags.*—Key tags shall be made of fiber conforming to grade CH of Military Specification JAN–F–1148.

3.1.2 *Key holders.*—Key holders for type A tags shall be made of brass. For type B tags the holders shall be half-round steel wire 0.040 by 0.080 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

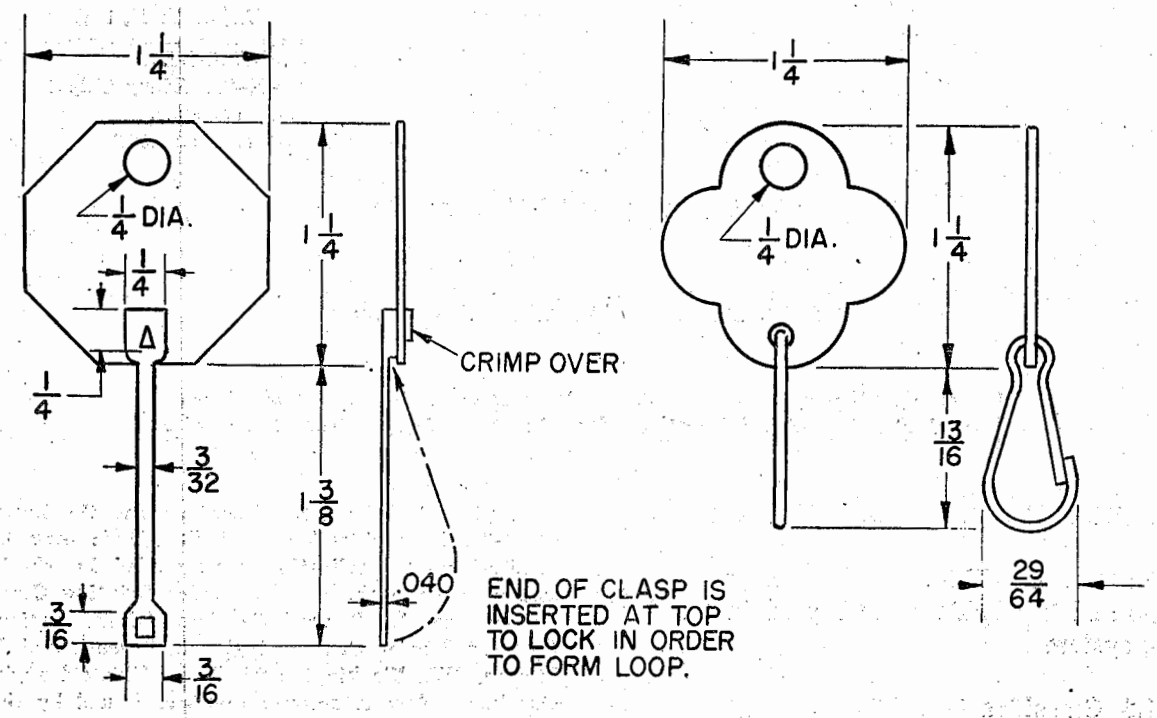


FIGURE 1.—Tag and holder, key.

3.2 Key tags.

3.2.1 *Dimensions.*—The tags shall be of the shapes and dimensions shown on figure 1 (see 6.2).

3.2.2 *Thickness.*—The tags shall be not less than 0.045 nor more than 0.0625 inch in thickness.

3.2.3 *Holes.*—The holes in the tags shall be as shown on figure 1.

3.2.4 *Color.*—Type A tags shall be natural color. Type B tags shall be red.

3.2.5 *Stamping.* — Type A tags shall be engraved, indented, or stamped with the legend "File Key Must Not Be Loaned". Class 1 tags shall have consecutive numerals which shall be $\frac{3}{16}$ inch high with a minimum face width of each character of $\frac{1}{32}$ inch. The numbers shall be stamped through a tape containing pigment-type colors which shall be embedded into the fiber under a temperature of not less than 250° F. and depressed into the fiber not less than 0.005 inch. For ready legibility the color of the pigment used in the numbering shall be red for the natural tag and white for the red tag. The numerals shall be as specified (see 6.1).

3.2.5.1 Tags, engraved, indented, or stamped (see 3.2.5) in accordance with manufacturers' commercial practice, with black enamel in sufficient number of coats to fill numerals practically flush with surface of tag will also be acceptable. Letters and numerals shall be cut to a depth of 0.005 inch minimum.

3.2.5.2 Class 2 tags shall be left blank.

3.3 Key holders.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

3.3.1 Holders for type A tags shall be of one-piece construction, securely attached to the fiber tag and shall be so designed that the tag may be permanently locked to the key when the fastening device (holder) is closed. Holders shall be of the self-locking type, easily locked without the use of tools.

3.3.2 Holders for type B tags shall be of the snap-hook type, and spring tempered to take a ⅛-inch rod through the hook snap without distorting the shape.

3.4 Tags and key holders shall be completely assembled, ready for use. All subsequent references to tags in this specification shall refer to the fiber tag and the holder completely assembled, ready for use.

3.5 A set of key tags shall consist of one file key tag, type A, with holder, and one or more working key tags, type B, with holders.

3.6 **Finish.**—Tags and holders shall have a smooth, clean surface. Holders for type B tags shall be zinc-coated.

3.7 **Workmanship.**—Key tags and key holders shall be of first-class workmanship, and shall be free from pits, scales, fins or any other defects which may affect the appearance or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.* — All key tags and holders of the same class and type not exceeding 10,000, presented at one time, shall be considered a lot for purposes of acceptance, inspection, and tests.

4.1.2 *Sampling for inspection.*

4.1.2.1 *Sampling for intermittent procurement in isolated lots.*—A random sample of key tags and holders shall be selected as specified in table I from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with a lot acceptance based on the sampling inspection requirements in accordance with Military Standard MIL–STD–105:

TABLE I.—*Sampling for visual and dimensional inspection AQL (approx.) = 2.5 percent defective.*

Number of key tags and holders in inspection lot	Number of key tags and holders in sample	Acceptance number (defectives)	Rejection number (defectives)
110 and under	15	1	2
111 to 300	25	1	2
301 to 500	35	2	3
501 to 800	50	3	4
801 to 1300	75	4	5
1301 to 3200	110	6	7
3201 to 10,000	150	8	9

NOTE: The government inspector may institute tightened or reduced inspection in accordance with section 9 of Military Standard MIL–STD–105.

4.1.2.2 *Sampling for continuous production.*—Where there is continuous production for the Government, and inspection lots include at least 300 items, sampling for Government inspection shall be conducted in accordance with Military Standard MIL–STD–105 at Inspection Level I and AQL = 2.5 percent defective; the type of sampling (single, double, or multiple) to be determined by the Government inspector.

4.2 Inspection.

4.2.1 *Visual and dimensional inspection.*—Each of the sample key tags and holders selected in accordance with table I shall be visually and dimensionally inspected by the Government inspector to verify compliance with this specification. Any key tag and holder in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective key tags and holders in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected. Rejected lots may be offered again for Gov-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

ernment inspection provided the contractor has repaired or removed all nonconforming key tags and holders. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with this specification.

4.3 Additional inspection. — Where other specifications form a part of this specification sampling, inspection, and tests shall be conducted as required in the referenced specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Unless otherwise specified, class 1 tags packaged 100 to a box shall be strung in numerical sequence on a flexible 24-gage wire and properly labeled. Class 2 tags shall be packaged 100 to a box. Commercial packaging will be acceptable.

5.2 Packing.—Unless otherwise specified, the subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.—Unless otherwise specified, shipments shall be marked with the name of the material, and the quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, and the number of the contract or order.

6. NOTES

6.1 Ordering data. — Procurement documents should specify the following, and purchasers should exercise any desired options offered herein (see 1.2.1, 1.2.2, 3.2.5.1, 5.1, 5.2, 5.3, and sec. 7.)

(*a*) Title, number, and date of this specification.

(*b*) Type and class required (see 1.2).

(*c*) Letters and numerals required for class 1 (see 3.2.5).

(*d*) Whether preparation for domestic or overseas shipment is required (see sec. 5 and 7.2.2).

6.2 THE ILLUSTRATIONS HEREIN ARE DESCRIPTIVE AND NOT RESTRICTIVE and are not intended to preclude the purchase of key tags and key holders otherwise conforming to this specification.

6.3 Transportation description.—Transportation description applicable to these items is:

Synthetic resin articles, not otherwise indexed by name.
In barrels or boxes.
Carload weight 30,000 pounds.
Plastic articles, not otherwise indexed.
In barrels or boxes.
Truckload weight 30,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and standards, of the issue in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specifications and standards.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Federal Specifications:

NN–B–601—Boxes, Wood-Cleated-Plywood, for Domestic Shipment.

NN–B–621—Boxes; Wood, Nailed and Lock-Corner.

QQ–S–781—Strapping, Flat, Steel.

UU–T–111—Tape; Paper, Gummed (Sealing and Securing).

LLL–B–631—Boxes; Fiber, Corrugated (for Domestic Shipment).

LLL–B–636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN–P–105—Packaging and Packing for Overseas Shipment — Boxes, Wood, Cleated, Plywood.

JAN–P–106—Packaging and Packing for Overseas Shipment — Boxes; Wood, Nailed.

JAN–P–108—Packaging and Packing for Overseas Shipment — Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.

JAN–P–120—Packaging and Packing for Overseas Shipment — Cartons, Folding, Paperboard.

JAN–P–133—Packaging and Packing for Overseas Shipment — Boxes, Set-Up; Paperboard.

JAN–P–139—Packaging and Packing for Overseas Shipment — Plywood, Container-Grade.

MIL–A–10547—Liners, Case, Waterproof.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking of Shipments.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Preparation for delivery.*

7.2.2.1 *Packaging for domestic and overseas shipment.*—Class 1 tags and holders shall be strung in quantities of one hundred, in numerical sequence, on flexible 24-gage wire. One hundred sets of class 1 tags strung on wires or one hundred class 2 tags in bulk shall be packaged in a folding carton or full-telescope set-up box conforming to Military Specifications JAN–P–120 or JAN–P–133, respectively. Each carton or box shall be securely sealed with a gummed kraft tape conforming to Federal Specification UU–T–111.

7.2.2.2 *Packing.*

7.2.2.2.1 *For domestic shipment.*—Sets of key tags and holders packaged as specified in 7.2.2.1 shall be packed in wood cleated plywood, nailed wood, corrugated or solid fiberboard boxes conforming to Federal Specification NN–B–601, NN–B–621, style 2, 2½ or 3, LLL–B–631 or LLL–B–636, style RSC, respectively. The gross weight of wood boxes shall not exceed 150 pounds; of fiberboard boxes, 70 pounds. Boxes shall have a minimum bursting strength of board of 275 pounds.

7.2.2.2.2 *For overseas shipment.*—Sets of key tags and holders, packaged as specified in 7.2.2.1 shall be packed in cleated plywood, nailed wood, corrugated or solid fiberboard boxes conforming to Military Specification JAN–P–105, style A or B, JAN–P–106, style 2, 2½ or 3; or JAN–P–108, symbol V3c or V3s, respectively. When plywood boxes are used, the plywood shall conform to type A or B, condition I of Military Specification JAN–P–139. Shipping containers shall be lined with a sealed waterproof case-liner made of material conforming to Military Specification MIL–L–10547 and appendix thereto. Shipping containers shall be strapped in accordance with the applicable container specification, using type I, class A or B, ⅝ or ¾-inch by 0.020 inch thick, flat steel strapping conforming to Federal Specification QQ–S–781. The gross weight of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

wood or wood-cleated boxes shall not exceed approximately 100 pounds; of fiberboard boxes, approximately 70 pounds.

7.2.2.3 *Marking.*—In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Military Standard MIL–STD–129. The nomenclature shall be as follows:

Tag and Holder, Key.

7.2.3 *Sampling.* — Sampling shall be in accordance with Military Standard MIL–STD–105.

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.