FF-T-77B
December 3, 1971
SUPERSEDING
Fed. Spec. FF-T-77a
August 28, 1967

FEDERAL SPECIFICATION

TAG AND HOLDER, KEY

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers tags and holders for key indexing systems.

1.2 Classification. Tags and holders shall be of the following types, classes, and styles, as specified (see 6.2).

Type A - File tag.

Type B - Working tag.
Style I)- See figure 1.
Style II)

Class 1 - Engraved.
Class 2 - Blank.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566 - Box, Folding, Paperboard.
PPP-B-601 - Boxes, Wood, Cleated Plywood.
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-676 - Box, Setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Office in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-F-1148 - Fiber, Vulcanized, Electrical and Mechanical Grades.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military specifications and standards, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of the specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Material.

3.1.1 Tags. Tags shall be made of fiber conforming to grade BH or CH of MIL-F-1148.

3.1.2 Holders. For type A tags, the holders shall be made of brass. For type B tags, the holders shall be made of nickel-plated, half-round steel spring-wire approximately 0.040 by 0.080 inch.

3.2 Tags.

3.2.1 Design. Tags shall be in accordance with the configurations shown in figure 1.

3.2.2 Thickness. Tags shall be 0.055 ± 0.010 inch thick.

3.2.3 Holes. Holes in the tags shall be as shown in figure 1.

3.2.4 Color. When specified (see 6.2), type A tags shall be natural in color. Type B tags may be red in color.

3.2.5 Lettering. Type A tags shall be engraved, indented, or stamped with the legend "File Key Must Not Be Loaned". Class 1 tags shall be numbered consecutively. Numerals shall be as specified (see 6.2). Letters and numerals shall be cut to a depth of 0.005 inch minimum. The color of the numbers shall be selected for maximum legibility.

3.3 Holders.

3.3.1 Holders for type A tags shall be of one-piece construction, securely attached to the fiber tag and so designed that when the fastening device is closed the key is permanently locked to the holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

3.3.2 Holders for type B tags shall be the snaphook-type, and shall be spring-tempered so that a 1/8-inch rod pushed through the snaphook will not distort the shape of the holder.

3.4 Dimensions. Dimensions not shown in figure 1 shall be established by the manufacturer. The established dimensions shall not change the configuration of the tag or holder from that shown in figure 1.

3.5 Workmanship. The quality of workmanship shall meet the standards prevalent among manufacturers who normally produce equipment of the type specified herein and shall be free from pits, scales, fins, or any other defects which affect the appearance of serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirement specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, and in accordance with the requirements of this specification. In the event of conflict, this specification shall govern.

4.2 Inspection lot. All tags and holders of the same type, style (when applicable), and class, offered to the Government at one time, shall be considered a lot for purposes of inspection.

4.3 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.5, and the tests of 4.6 on samples selected in accordance with 4.4. Any unit in a sample, as outlined in 4.4, containing one or more defects shall be rejected, and the lot represented by the sample shall be accepted or rejected as outlined in MIL-STD-105.

4.4 Sampling.

4.4.1 Sampling for examination. A random sample of tags and holders shall be selected from each lot in accordance with MIL-STD-105 at inspection level II. In terms of defects per 100 units, the acceptable quality levels shall be 1.5 for major defects and 4.0 for minor defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling for tests. A random sample of tags and holders shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-4. The acceptable quality levels shall be based on 4.0 percent defective.

4.5 Examination. Each sample shall be examined to verify compliance with this specification. Examination shall be conducted as specified in table I.

TABLE I. Classification of defects

Categories	Defects
Critical	None defined.
Major	
101	Any component part missing, broken, or otherwise unusable.
102	Not the specified type and class of tag and holder.
103	Numbers illegible.
104	Incorrect metal used in holders.
Minor	
201	Identification marking not complete.
202	Omitted, illegible marking.
203	Finish not free of scratches or roughness.

4.6 Tests.

4.6.1 Sealing test, type A. Samples selected in accordance with 4.4.2 shall be suspended on the fastening device and then locked in accordance with the manufacturer's instruction. The entire unit shall then be placed in a tensile tester and subjected to tension until the device ruptures. If the holder or device opens at point of closure without destruction of the holder, it shall be rejected.

4.7 Inspection of preparation for delivery. The preservation, packaging, packing, and marking of the tags and holders shall be inspected to determine conformance with the applicable requirements of section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Fifty class 1 tags and holders shall be strung on flexible 24-gage wire in numerical sequence. Fifty class 1 tags strung on wire, or fifty class 2 tags in bulk, shall be packaged in a box conforming to PPP-B-566 and PPP-B-676.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

5.1.1.2 Intermediate packaging. Unit packages in quantities as specified (see 6.2), shall be placed in a close-fitting box conforming to PPP-B-636, weather-resistant class, waterproof-sealed with tape in accordance with the appendix thereto.

5.1.2 Level C. The tags and holders shall be packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The tags and holders, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636, weather-resistant class grade V3c, PPP-B-640 (class 2), or PPP-B-601 (overseas type), respectively.

5.2.2 Level B. The tags and holders, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636 (domestic class).

5.2.3 Level C. The tags and holders, packaged as specified in 5.1, shall be packed in a manner which will insure arrival at destination in satisfactory condition and be acceptable to the carrier at lowest rates. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129 as applicable.

6. NOTES

6.1 Intended use. The tags and holders covered by this specification are intended for use in key control systems and key cabinet indexing systems.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.

b. Type, class, and style of tag and holder required (see 1.2).


c. Color of tag required, if different (see 3.2.4).

d. Type and numerals required (see 3.2.5).

e. Level of packing required and level of packaging required (see 5.1 and 5.2).

f. Number of unit packages per intermediate package (see 5.1.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

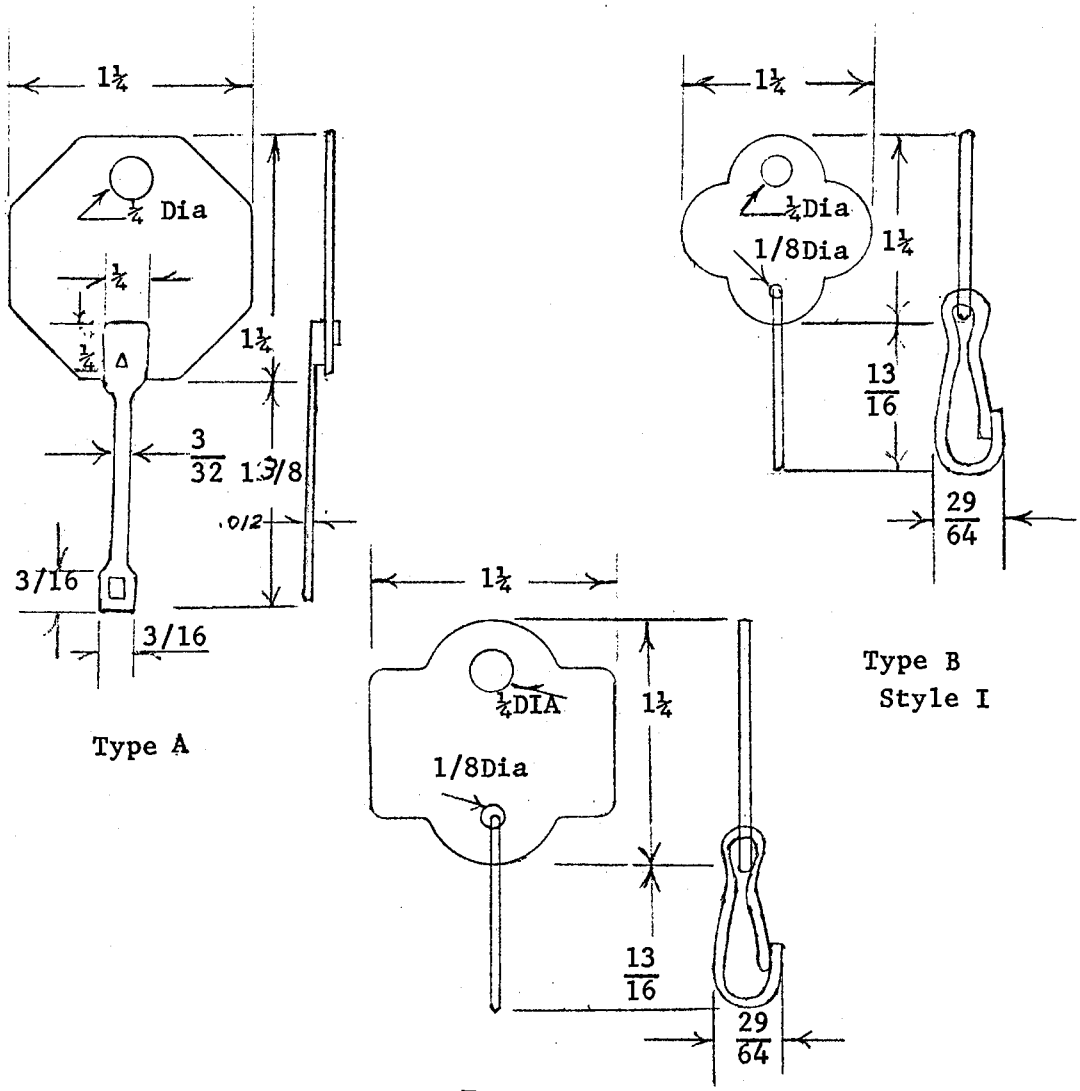

Type A

Type B
Style I

Type B
Style II

Notes -

1. Dimensions are in inches.
2. Tolerance ± 1/32 inch.

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Navy - YD
Air Force - 84

Review activity:

Navy - SH

Preparing activity:

Navy - YD

CIVIL AGENCY INTEREST

GSA - FSS

(Project No. 9905-0175)

Orders for this publication are to be placed with
tration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

FF-T-77B: TAG AND HOLDER, KEY

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

FOLD

Commanding Officer
U.S. Naval Construction Battalion Center
Davisville, Rhode Island 02854

POSTAGE AND FEES PAID
NAVY DEPARTMENT



OFFICIAL BUSINESS

Commanding Officer
U.S. Naval Construction Battalion Center
Code 310
Davisville, Rhode Island 02854

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.