INCH-POUND

MS17811B
27 March 1996
Superseding
MS17811A
29 APRIL 1988

MILITARY SPECIFICATION SHEET

WASHER, THRUST, STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: NONE.

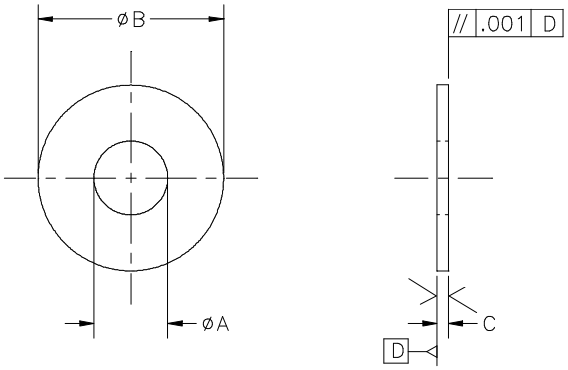

Table I. Dash numbers and dimensions.

Dash Number	∅A Inside Diameter +.005 -.000	∅B Outside Diameter ±.005	C Thickness ±.002
-0	.188	.500	.051
-1	.252	.500	.094
-2	.314	.625	.062
-3	.314	.625	.125
-4	.377	.625	.062
-5	.377	.625	.125
-6	.439	.875	.062
-7	.439	.875	.156
-8	.502	.750	.062
-8A	.502	1.000	.187
-9	.502	1.125	.062
-10	.564	1.375	.187
-11	.627	1.250	.094
-12	.627	1.375	.187
-13	.627	1.500	.187
-14	.690	1.344	.187
-15	.752	1.000	.156
-16	.752	1.625	.125
-17	.877	2.000	.125

(B) Entire document revised

DISTRIBUTION STATEMENT A. Approve for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

Table I. Dash numbers and dimensions. (Continued)

Dash Number	∅A Inside Diameter +.005 -.000	∅B Outside Diameter ±.005	C Thickness ±.002
-18	.877	2.250	.187
-19	1.002	1.562	.125
1/ -20	1.002	2.000	.125
-27	1.502	3.000	.156
-28	1.502	3.250	.156
-29	1.627	2.968	.250
-30	1.752	3.094	.250

1/ Dash number 20 is inactive for new design.

Requirements:

1. MATERIAL: Carbon steel, AISI 1020.

2. SURFACE ROUGHNESS: Surface roughness shall be in accordance with ANSI/ASME B46.1. Surfaces marked with √ are to have a surface roughness of 16√ on sizes up to and including -9, and 32√ on sizes -10 and larger. All other surfaces are to be 125√.

3. HEAT TREATMENT: Case hardened to a minimum case depth of .015 inch. Minimum hardness shall be Rockwell 58 HRc.

4. WORKMANSHIP: All edges on sizes up to and including .125 inch thick shall not be less than .005 inch or more than .015 inch radius. On thicker sizes radius shall be .01 to .03 inch.

5. APPLICATION: Washer, thrust is designed primarily for supporting a load acting against a bearing taking an end thrust. This part is not to be confused with washer, flat, plain.

6. PART NUMBER: The MS part number is the basic MS number plus a dash number taken from the table. Example MS17811-12.

NOTES:

1. Dimension are in inches unless otherwise specified.

2. Interpret drawing in accordance with ASME Y14.5M.

3. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

4. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

Military Interests:

Custodians:
Army - AT
Navy - OS

Preparing activity:
DLA - IS

(Project 3120-0772)

Reviewer:
Army - ME, MI
Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.