INCH-POUND

MIL-PRF-64266/7
25 November 2008

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG AND RECEPTACLE STYLE,
MULTIPLE REMOVABLE GENDERLESS TERMINI, SCREW THREADS,
LIGHT DUTY BACKSHELL, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification sheet and MIL-PRF-64266.

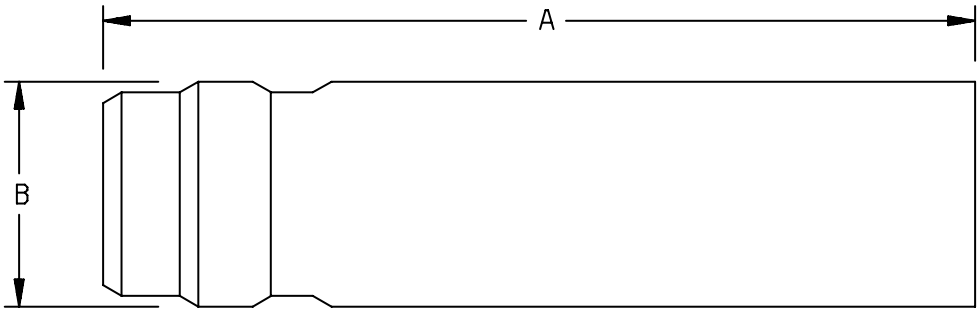

FIGURE 1. Light duty backshell.

AMSC N/A

FSC 6060

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Shell size	Shell size designator	Dimension A maximum	Dimension B dia maximum
11	B	3.50 (88.9)	1.20 (30.5)
13	C	3.50 (88.9)	1.20 (30.5)
15	D	3.50 (88.9)	1.50 (38.1)
23	H	3.50 (88.9)	2.25 (57.2)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply to plated/finished part.
4. Metric equivalents (mm) are in parentheses.
5. Backshell internal configuration not shown.

FIGURE 1. Light duty backshell - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 herein and MIL-PRF-64266, figure A-6.

Weight:

Shell size	Weight (ounces), gram, maximum
11	5.0
13	5.5
15	7.0
23	19.5

Fiber optic cable:

Cable diameter: .071 inch (1.80 mm) to .094 inch (2.39 mm).

Cleaning procedures: Each shipment of connectors shall include recommended cleaning procedures. The following wording or equivalent is recommended "To clean, use lint free wipe dampened with alcohol and blow dry with air."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Cable pull-out force: Not less that 15 lbs (67 N).

Cable seal flexing: Not applicable.

External bending moment: Not applicable.

Impact: Not applicable.

Crush: Not applicable.

Water pressure: Not applicable.

Freezing water: Not applicable.

Sand and dust: Not applicable.

Electromagnetic effects: Not applicable.

Salt spray: Not less than 96 hours.

Fluid immersion: Not applicable.

Marking:

PIN: Marked on coupling ring of the backshell.

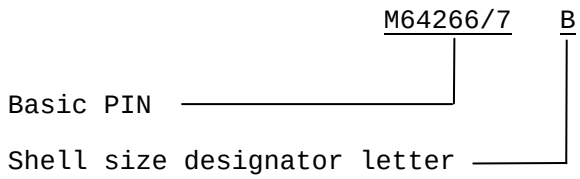

Mating counterpart: Backshell mates with MIL-PRF-64266/1 receptacle, MIL-PRF-64266/2 plug, and MIL-PRF-64266/3 receptacle.

Installation and removal tools: Adjustable or 1.25 inches (31.8 mm) open end wrench, strap wrench, and scissors.

Referenced documents. In addition to MIL-PRF-64266, this specification sheet references the following documents:

MIL-PRF-64266/1
MIL-PRF-64266/2
MIL-PRF-64266/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force – 85
DLA - CC

Review activities:
Navy - AS
Air Force - 13, 19, 93, 99
NASA - NA

Preparing activity:
DLA - CC

(Project 6060-2006-009)

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.