MIL-C-22704B (WP)
15 FEBRUARY 1965
SUPERSEDING
MIL-C-22704A (WEP)
1 MARCH 1963

MILITARY SPECIFICATION

COMPUTER SET, NAVIGATIONAL AN/AYK-2(*)

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy

1. SCOPE

1.1 Scope - The equipment covered by this specification shall accept signals from a doppler velocity sensor, airspeed transducer, and compass system and compute wind and N-S and E-W components of distance traveled.

*1.2 Classification - The Computer Set, Navigational shall consist of the items listed in 6.7.

*1.3 Associated Equipment - The equipment shall operate with the associated equipment listed in 6.11 which shall not be supplied as part of the equipment.

2. APPLICABLE DOCUMENTS

*2.1 General - The documents listed in 6.8 of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein.

3. REQUIREMENTS

*3.1 Preproduction - This specification makes provision for preproduction testing.

*3.2 Parts and Materials - In the selection of parts and materials, fulfillment of major design objectives shall be the prime consideration. In so doing the following shall govern:

(1) Microelectronic items shall conform to requirements specified herein.

(2) Other parts and materials requirements shall conform to Specification MIL-E-5400.

(3) Nonrepairable subassemblies, as outlined in Specification MIL-E-5400, shall be used when practicable. The general size of the subassembly and the amount of circuitry to be included therein shall be approved by the procuring activity. Nonrepairable subassemblies must be reliable. (See 6.4.)

(4) When previously produced models of this equipment did not use nonrepairable subassemblies, the design shall not be changed to employ nonrepairable assemblies without the approval of the procuring activity.

*3.2.1 Nonstandard Parts and Materials Approval - Approval for the use of nonstandard parts and materials shall be obtained as outlined in Specification MIL-E-5400.

*3.2.2 Electron Devices - Electron tubes, transistors and diodes shall be chosen and applied, and the complements reported as outlined in Specification MIL-E-4682. The complement report must be submitted to the procuring activity for review and approval prior to preproduction testing.

*3.3 Design and Construction - The equipment shall conform with all the applicable requirements of Specification MIL-E-5400 for design, construction and workmanship, except as otherwise specified herein.

FSC 5826

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:22Z
Check the source to verify that this is the current version before use.

*3.3.1 Total Weight - The total weight of the equipment, excluding cables, shall be a minimum consistent with good design and shall not exceed 23.6 pounds.

3.3.2 Reliability

*3.3.2.1 Operational Stability - The equipment shall operate with satisfactory performance, continuously or intermittently, over a period of at least 200 hours without the necessity for readjustment of any controls.

*3.3.2.2 Operating Life - The equipment shall have total operating life of 4000 hours with reasonable servicing and replacement of parts. Parts requiring scheduled replacement shall be specified by the contractor.

*3.3.2.3 Reliability in Mean Time Between Failures - The equipment shall have 200 hours of mean (operating) time between failures when tested and accepted as outlined under the requirements of 4.4.3.

*3.3.2.4 Time Totalizing Meter - The equipment shall contain time totalizing meters in accordance with Specification MIL-M-7793. Meters shall be included in the following units:

Unit	Type of Meter
Control-Indicator	MS17322-6 (with modified flange)
Computer	MS17322-6 (with modified flange)

3.3.3 Cabling and Connections

*3.3.3.1 Cables and Connectors - The equipment shall provide for the use of cables and connectors in accordance with Specification MIL-E-5400.

*3.3.3.2 Interconnection Cabling - The equipment shall be capable of satisfactory operation using external wiring in accordance with the applicable requirements of Specification MIL-W-5088. The external wiring shall be unshielded, except that a minimum number of the individual wires may be shielded when demonstrated as necessary to meet interference control requirements and provided the assembly of the cable to its plugs may be easily accomplished. External cables and that portion of the connectors attached to the cables shall not be supplied as part of the equipment. Interconnection cabling shall conform to Figure 1.

*3.3.4 Control Panels - All rack or console mounted control panels shall conform to the applicable requirements of Specification MIL-C-6781. The configuration of all control panels must be approved by the procuring activity prior to preproduction testing.

*3.3.5 Interchangeability of Reordered Equipment - For reordered equipment interchangeability shall exist between units and all replaceable assemblies, subassemblies, and parts of a designated model of any previously manufactured equipment, supplied or designated by the procuring activity.

*3.3.6 Interference Control - The generation of radio interference by the equipment and the vulnerability of the equipment to radio interference shall be controlled within the limits of Specification MIL-I-6181.

*3.3.7 Maintenance Provisions and Field Testing - Provisions for maintenance shall be as specified in Specification MIL-E-5400. Specific test points and test facilities shall be provided to the greatest extent practicable for ease of field testing and maintenance.

*3.3.8 Nomenclature and Nameplate - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with Specification MIL-N-18307.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:38:47Z
Check the source to verify that this is the current version before use.

*3.3.9 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

Temperature	Room ambient (25° C ± 5° C)
Altitude	Normal Ground
Vibration	None
Humidity	Room ambient up to 90% relative humidity
Input power voltage	115 ± 1.0 V AC and 27.5 ± 0.5 V DC

*3.3.10 Service Conditions - The equipment shall operate satisfactorily under any of the environmental service conditions or reasonable combination of these conditions as specified in Specification MIL-E-5400 for Class I equipment, except as modified herein.

*3.3.10.1 Vibration - The equipment shall operate satisfactorily when subjected to the vibration requirements of curves IV and II of Specification MIL-E-5400.

*3.3.11 Warm-Up-Time - The time required for the equipment to warm up prior to operations shall be kept to a minimum and shall not exceed 5 minutes under standard conditions and 15 minutes at extreme service conditions.

*3.3.12 Primary Input Power Requirements - The equipment shall meet all applicable requirements of MIL-STD-704 and shall give specified performance from the following power sources with characteristics as defined in MIL-STD-704 having limits as specified therein. The power required shall not exceed the specified amounts.

(1) AC Power (Single Phase) 115 V, Category "b", 85 VA.

(2) DC Power 28 V, Category "b", 2 Amps.

Note: DC and AC power is supplied to plotting boards and indicators through AN/AYK-2 wiring.

*3.3.12.1 Degraded Performance - Degraded performance will be permitted for voltage transients not exceeding 0.5 second during normal electric system operation. Operation shall return to normal with no resulting damage to the equipment.

*3.3.13 Calibration Adjustments - The number of adjustments required to calibrate the computer within the performance requirements of this specification during field maintenance shall not exceed 4. Individual modules shall be factory adjusted so that modules may be interchanged without recalibration. The performance requirements of this specification must be met without recalibration after changing modules.

*3.4 Performance - Unless otherwise specified, values set forth to establish the requirements for satisfactory performance apply to performance under both standard and extreme service conditions. When reduced performance under the extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under the standard conditions will be specified.

*3.4.1 Operation - The equipment shall accept inputs of doppler velocity along and across track, airspeed, and heading from which N-S and E-W components of distance traveled, ground velocity, and wind shall be computed and supplied to external equipment.

3.4.2 Inputs

*3.4.2.1 Doppler Ground Velocity Input Signals - The computer shall be designed to accept voltages representing on heading (Vh) and cross heading (Vd) velocities from a doppler navigator. The velocities will be referenced to a 115 volt reference voltage supplied by the doppler velocity sensor. The velocity signals will change in magnitude directly proportional to changes in the magnitude of the reference voltage. The scale factor of the velocity signals will be 30 mv/knot when the reference voltage is 115 V. The reference voltage shall be in phase within ± 2° with the line voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10 08:11:32 EST
Check the source to verify that this is the current version before use.

The 400 cps component of signal that is in-phase or 180° out of phase with the reference shall be the voltage considered in determining the scale factor. A positive velocity along heading and a right drift velocity shall be represented by a signal that is in phase ± 4° with the reference voltage, while a negative velocity along heading and left drift velocity will be represented by signal 180 ± 4° out of phase with the reference voltage. The velocity signals may have a total harmonic distortion of up to 3% of the fundamental and individual harmonics up to 2% of the fundamental. The computer shall not be damaged by a step input voltage from 0 to 30 volts in either the Vh or Vd channels. No more than 25 va of the 115V reference signal supplied by the doppler velocity sensor shall be used by this computer. The minimum impedance of this computer to the doppler ground velocity signal (Vh and Vd) inputs shall be 30, 000 ohms. This input shall be electrically isolated from the signal and power grounds.

*3.4.2.2 Airspeed Input Signal - The computer set, navigation shall be capable of accepting an airspeed signal from airspeed transducer types T-570/ASA-13 or T-349/APA-57 or an approved equivalent. The airspeed input shall cover ranges of 0-190 knots and 70-435 knots, selected by means of an electrical linkage. The airspeed inputs shall be in synchro form with a scale factor of 1.8° per knot for the 0-190 knots range and 0.943° per knot for the 70 - 435 knots range. Electrical zero of the synchro shall correspond to airspeed inputs of -5.7 knots and 70 knots respectively for the 0-190 knots and 70 - 435 knots ranges.

*3.4.2.3 Heading Input - The computer set, navigation shall accept inputs in the form of three wire synchro signals representing magnetic heading from a MF-1 or MA-1 compass system at a scale factor of 1° per degree.

*3.4.2.4 Correction Input - Means shall be provided for applying correction signal voltages to the summing points of the integrators in order that the output rate of the integrators may be modified by a signal from an independent source. The correction signals shall be in phase or 180° out of phase with the reference voltage depending on the desired direction of the correction, i.e., an in phase signal shall cause an increase in velocity in the N and E directions and an out of phase voltage shall cause an increase in velocity in the S and W directions. The scale factor of the correction signal shall be 30 mv/knot. The input impedance shall be greater than 10, 000 ohms.

3.4.3 Outputs

*3.4.3.1 Distance Output - The equipment shall provide synchro output signals representing N-S and E-W distances traveled at a scale factor of 2 nautical miles per revolution. This information shall be in the form of synchro voltages from a Kearfott 7RS910-1L synchro or an approved equivalent.

*3.4.3.2 True Heading Output - The equipment shall include provisions for transmitting heading information, corrected for magnetic variation to auxiliary equipment at a scale factor of 1° per degree. This information shall be in the form of synchro voltages from a Kearfott 7RS910-1L synchro or an approved equivalent.

*3.4.3.3 N-S and E-W Components of Velocity Output - N-S and E-W components of aircraft velocity (ground speed) shall be supplied to the AN/ASA-16 at a scale factor of 30 millivolts per knot 400 cps when the reference voltage is 115 V. The load impedance shall be 1000 ohms ± 1%. The velocity outputs shall be identical to the velocity components being integrated at the time regardless of mode of operation. An in-phase signal with respect to the 115 V AC aircraft power shall correspond to north and east velocity components and a 180° out-of-phase signal shall correspond to south and west velocity components. The allowable phase shift in the output signal shall be 0 ± 4° with respect to the 115 V AC reference voltage. The N-S and E-W components of velocity outputs shall be isolated with respect to both the signal and power grounds.

*3.4.3.4 N-S and E-W Components of Wind Output - N-S and E-W components of wind shall be supplied to the AN/ASA-16 at a scale factor of 30 millivolts per knot when the reference voltage is 115 volts. Maximum wind on either channel shall be 120 knots. An in-phase signal with respect to the 115 volts AC aircraft power shall correspond to south and west wind components and a 180° out-of-phase signal shall correspond to north and east wind components. The minimum load impedance will be 100, 000 ohms. The allowable phase shift in the wind output signal shall be 0 ± 4° with respect to the 115 volt AC reference voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:47Z
Check the source to verify that this is the current version before use.

*3.4.3.5 True Airspeed Output - An isolated electrical output of true airspeed shall be provided as a 400 cps voltage at a scale factor of 30 millivolts per knot when the reference is 115 volts. The output shall be in phase ± 2° with the reference voltage. The load impedance shall be 1000 ohms ± 1%.

*3.4.4 Modes of Operation - The computer set shall be designed to have the following modes of operation:

*3.4.4.1 Air Mass Mode - The computer set shall compute N-S and E-W distances traveled using the compass and airspeed signals and manually inserted wind data. The 115 V reference signal shall not be required for the operation of the computer set in the air mass mode.

*3.4.4.2 Doppler Mode - The computer set shall compute wind and the N-S and E-W components of distance traveled using the doppler ground velocity sensor, compass, and airspeed signals. The N-S and E-W distances shall be computed directly from the doppler ground velocity regardless of the status of the wind servomechanisms.

*3.4.4.3 Doppler-Off Mode - In the doppler-off mode of operation the computer set shall use the computed wind, airspeed, and heading information to compute the components of distance traveled. The computer shall be placed in the doppler-off mode by a 28 ± 6 V DC signal from the doppler ground velocity equipment. The 115 V reference signal shall not be required for the operation of the computer in the doppler-off mode.

*3.4.4.4 Velocity Correction Mode - A ground connection will be presented by the AN/ASA-16 at the beginning of the velocity correction computation and will persist for the duration of the period during which velocity correction is to be applied to the navigational computer group. This ground connection shall be used to transfer the internal operating mode from doppler mode to doppler-off mode such that the velocity correction signals will be summed with true airspeed and the computed wind existing at the time of transfer. Upon termination of the velocity correction mode ground connection the navigational computer group shall automatically return to the operation selected by the front panel function switch, as modified by the status of the doppler memory signal. When the velocity correction mode ground connection is not applied, the velocity correction signals shall have no effect on the ground distance computations.

*3.4.5 Accuracy

*3.4.5.1 Circular Plot Accuracy - In the doppler mode of operation with the heading input changing at a rate of 180° per minute, the drift of the circular plots of the N-S and E-W distance outputs shall not exceed 0.4 knot or 1/4% of the input velocity, whichever is larger. Below -20°C and above +50°C the drift shall not exceed 0.6 knot or 3/8% of the input velocity, whichever is larger.

*3.4.5.2 Doppler Mode Accuracy - The error between the terminal point of the ground track as computed by the equipment, and the terminal point of the theoretical ground track as determined by the Vh, Vd and heading inputs shall not exceed 1/2% of the total length of the ground track when operating in ground track speed range of 100 to 435 knots. With input speeds from -50 to 100 knots, the error in terminal point shall not be greater than that resulting from a 1/2-knot velocity error. The error in the speed range of 100 to 435 knots below -20°C and above +50°C shall not exceed 1% of distance traveled. From -50 to 100 knots, the error shall not exceed that represented by a 1-knot error in velocity.

*3.4.5.3 Doppler-Off Mode Accuracy - When the equipment is placed in the doppler-off mode of operation with fixed inputs of heading and airspeed, the computer set shall continue to compute distance traveled with an error not greater than 3/4% of theoretical distance traveled, as determined by Vh, Vd, and heading just prior to doppler-off mode of operation, in the ground track speed range of 100 to 435 knots. In the speed range of -50 to 100 knots, the position error shall not be greater than that resulting from a velocity error of 3/4 knot. Below -20°C and above +50°C, the error shall not exceed 1% and 1 knot, respectively.

*3.4.5.4 Air Mass Mode Accuracy - The error in ground track as computed shall not exceed 3/4% of the theoretical value ± 2 knots as determined by airspeed, heading, and wind setting for ground track speeds of 100 to 435 knots. In the speed range from -50 to 100 knots the error shall

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T11:38:47Z
Check the source to verify that this is the current version before use.

not exceed a 3/4-knot error in velocity, ± 2 knots. Below -20°C and above +50°C the errors shall not exceed 1% and 1 knot, respectively, ± 2 knots.

*3.4.5.5 Heading Accuracy - The difference between the true heading output signal and the heading plus variation shall not exceed 1/4°. The lag in the true heading output and the heading follow up mechanism used in the computer shall not exceed 1° at heading input rates of 36 degrees/second.

*3.4.5.6 N-S and E-W Components of Velocity Output Accuracy - The ground speed of the aircraft as determined from the N-S and E-W components of velocity output shall not differ from the theoretical value as calculated from Vh, Vd, heading and airspeed by more than 3/4 knot or 3/4%, whichever is greater under standard conditions, and 1-1/4 knots or 1-1/4%, whichever is greater below -20°C and above +50°C when operating in the doppler mode; and by not more than 1 knot or 1% whichever is greater under standard conditions and 1-1/2 knots or 1-1/2%, whichever is greater below -20°C and above +50°C when operating in the doppler-off or air mass modes.

*3.4.5.7 N-S and E-W Components of Wind Output Accuracy - When operating in the doppler mode the magnitude of the wind output as determined from the N-S and E-W components of wind output shall not differ from the theoretical value as calculated from Vh, Vd, and heading by more than 1 knot or 1/2% of Vh, plus 1/2% of Vd plus 1/2% of airspeed, whichever is greater under standard conditions; and by more than 1-1/2 knots or 3/4% of Vh plus 3/4% of Vd plus 3/4% of airspeed, whichever is greater below -20°C and above +50°C.

*3.4.5.8 Wind Display Accuracy - The wind display shall meet the accuracy requirements of 3.4.5.7, ± 2 knots.

*3.4.5.9 Airspeed Output Accuracy - The maximum error of the true airspeed output shall not exceed 0.6% of the Computer Set true airspeed input under standard conditions and 3/4% of the true airspeed input below -20°C and above +50°C.

3.5 Detail Requirements

*3.5.1 Control-Indicator C-3510(*)/AYK-2 - The control-indicator shall meet the following requirements:

*3.5.1.1 Function - The control-indicator shall provide for the selection of the various modes of operation and for displaying the computed wind velocity.

*3.5.1.2 Form Factor - The control-indicator shall be enclosed in a case. The overall dimensions of the control-indicator shall be as shown in Figure 2. Panel lighting shall be in accordance with Specification MIL-P-7788.

*3.5.1.3 Weight - The weight of the control-indicator shall not exceed 5.9 pounds.

*3.5.1.4 Contents - The indicator shall contain the necessary circuits and components, in modular form, to fulfill the functions described herein.

*3.5.1.5 Major Subassemblies - The following major subassemblies shall be included in the indicator:

*3.5.1.5.1 Wind Cursor and Reticle Drive - This subassembly shall contain the gearing and components necessary to position the reticles representing the N-S and E-W components of wind. It shall also enable readout in polar form of wind magnitude and wind direction through manual positioning of a rotatable cursor. In addition, it shall contain the variation input and true heading readout subassembly as well as all controls, switches and indicator lamps.

*3.5.1.5.2 Wind Servo Module - This subassembly shall automatically compute wind and correspondingly actuate the Wind Cursor and Reticle Drive assembly in the doppler mode of operation. It shall also permit manual actuation of the reticles in the air mass mode of operation. The follow-up rate of the servo shall be 15 ± 2 knots per minute. Below ± 10 knots of wind, the motor shall run at a speed approximately proportional to the error voltage. In the 10-15 knot range, the follow-up speed

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:22Z
Check the source to verify that this is the current version before use.

shall correspond to the voltage-speed characteristics of standard servo motors. The scale factor for wind computation shall be 30 mv/knot when referenced to the 115 V reference voltage.

*3.5.1.5.3 Electronic Module - This subassembly shall contain the components and amplifiers required to provide power and quadrature voltage rejection for the Wind Servo module, isolation for the input doppler signals, and the necessary remote mode switching.

*3.5.1.6 Controls - The control panel shall have the following controls:

*3.5.1.6.1 Variation Setting - A manual control shall be provided for setting magnetic variation to correct the magnetic heading information from the compass to true heading. The variation shall have a range of 180° east or west. Means shall be provided to prevent accidental movement of the control.

*3.5.1.6.2 Wind Setting - Two controls shall be provided for independently introducing N-S and E-W components of wind. Means shall be provided to prevent accidental movement of the controls.

*3.5.1.6.3 Mode Selection - The mode selector switch shall permit the selection of either air mass or doppler mode of operation.

*3.5.1.6.4 Power Switch - The power switch shall be used to interrupt AC and DC input power and the doppler reference signal.

*3.5.1.7 Displays - The following displays shall be included on the front panel of the control-indicator:

*3.5.1.7.1 True Heading - A direct reading display of true heading shall be incorporated readable to 0.5 degree.

*3.5.1.7.2 Magnetic Variation - A direct reading display of magnetic variation shall be incorporated, readable to 0.1 degree.

*3.5.1.7.3 Wind - The display shall be 4 inches in diameter with a set of cross reticles. The dial shall be edge lit for operation under reduced lighting conditions. The reticles shall be servoed in the doppler mode or manually set in the air mass mode. During normal aircraft usage the reticles shall not be subject to vibration to the extent that a wind readout within the accuracy requirements of 3.4.5.8 cannot be obtained. A rotatable cursor shall be located to permit readout of wind in polar coordinates. The cursor scale shall be readable to 2 knots and shall have a maximum scale value of 120 knots.

*3.5.1.7.4 Air Mass Mode Indicator Light - A light shall be provided and shall be lit to indicate doppler-off or air mass operation.

*3.5.1.7.5 Calibration Indicator Light - A light shall be provided and shall be lit to indicate that the calibration circuitry is in use.

*3.5.1.8 Electrical Connections - Connections shall be provided as shown in Figures 1 and 2.

*3.5.2 Computer, Navigational CP-592(*)/AYK-2 - The computer shall meet the following requirements:

*3.5.2.1 Function - The computer shall operate on input data of air speed, ground speed, heading, variation and wind velocity to provide outputs of distance traveled in miles and computed wind.

*3.5.2.2 Form Factor - The form factor shall be as shown in Figure 3.

*3.5.2.3 Weight - The weight of the computer shall not exceed 17.7 pounds.

*3.5.2.4 Contents - The computer shall contain the necessary circuits and components, in modular form, to fulfill the functions described herein.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:27Z
Check the source to verify that this is the current version before use.

*3.5.2.5 Major Subassemblies - The following major subassemblies shall be included in the computer:

*3.5.2.5.1 Computer Assembly - The computer assembly shall contain the necessary circuitry, transformers, switching, connectors, etc. required to permit unified operation of all modules, amplifiers and components within the specified performance and accuracies.

*3.5.2.5.2 Power Module - The power module shall supply the various regulated D.C. voltages and in-phase and quadrature A.C. voltages needed by the computer.

*3.5.2.5.3 Airspeed Module - The airspeed module shall convert 3 wire airspeed information into the scaled voltages required for computation. It shall indicate upon a dial visible through a window the airspeed input to the module. It shall contain a switch permitting the choice of low airspeed or high airspeed operation consistent with Par. 3.4.2.2. It shall also generate the precision simulated doppler voltages used during calibration. The true airspeed servo shall be able to rotate 360° in 15 seconds.

*3.5.2.5.4 Heading Module - From inputs of 3 wire heading information this module shall provide 3 wire true heading information to the C-3510/AYK-2 torque receiver and to as many as four control transformers in associated external equipment. From scaled signal voltages of airspeed and doppler ground speed this module shall provide the North-South and East-West components of airspeed and ground speed required for computation.

*3.5.2.5.5 Integrator Module - This module shall provide 3 wire synchro information representing distance traveled, derived from scaled input voltages representing velocity. This module shall provide means for adjusting calibration. Two identical modules shall be used, one in the East-West channel and one in the North-South channel.

*3.5.2.6 Controls - The following non-operational controls shall be included on the front panel of the computer:

*3.5.2.6.1 Calibration Switch - A switch shall be provided to permit checking computer operation by placing the equipment in a calibration mode. In this mode, internally generated precision simulation of airspeed input signals, heading input signals, and doppler input signals appropriately applied shall enable calibration and check by activation and readout of the airspeed module, true heading module, wind display, and integrator modules.

*3.5.2.6.2 Strobe Switch - A switch shall be used to energize the strobe lamps within each integrator module for calibration purposes.

*3.5.2.7 Mounting - The computer shall be provided with suitable shock mounts. The mounts shall meet the requirements of Specification MIL-C-172.

*3.5.2.8 Subassembly Construction - Each module and amplifier shall be a plug-in unit. Each module shall have its individual dust cover. Module replacement within the computer assembly shall be possible without need to remove the module dust cover. In those modules in which gear trains are present, the gear trains shall be further enclosed to prevent entry of dust or foreign substances.

*3.5.2.9 Electrical Connections - Connections shall be provided as shown on Figures 2 and 3.

*3.6 Design Data - No data is required by this specification (other than reports accompanying samples submitted for testing) or by applicable documents, unless specified in the contract or order (see paragraph 6.9).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:38:47Z
Check the source to verify that this is the current version before use.

any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Classification of Tests - Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements:

(1) Preproduction Tests
(2) Production Sample Tests
(3) Acceptance Tests
(4) Life Tests

*4.2 Preproduction Tests - Preproduction tests shall be made on an equipment representative of the production equipments to be supplied under the contract. Preproduction tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure of 4.6. The government inspector and the procuring activity shall be advised when tests are to be conducted so that a representative may be designated to witness or supervise the tests when so desired. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory acceptable to the Government.

*4.2.1 Preproduction Test Data - The contractor shall submit all data collected in conducting these tests to the procuring agency for review and approval. On first production contracts this data shall include a list of all electrical and electronic parts giving their specified voltage, current and temperature rating and the applied circuit voltage, current and ambient and surface temperatures. The ambient and surface temperature shall be obtained under the extreme high temperature operating condition.

*4.2.2 Scope of Tests - Preproduction tests shall include all tests deemed necessary by the procuring activity to determine that the equipment meets all the requirements of this specification and the contract. Preproduction tests shall include environmental tests in accordance with the procedures of Specification MIL-T-5422 and interference tests in accordance with Specification MIL-I-6181.

*4.2.3 Preproduction Approval - Approval of the preproduction sample shall be by the procuring activity upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the preproduction sample. Prefabrication of production equipment prior to the approval of the preproduction sample is at the contractor's own risk. The approved preproduction sample will be returned to the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The preproduction sample shall not be considered as one of the equipments under the contract.

*4.2.4 Production Equipments - Equipments supplied under the contract shall in all respects, including design, construction, workmanship, performance and quality, be equivalent to the approved preproduction sample. Each equipment shall be capable of successfully passing the same tests as imposed on the preproduction sample. Evidence of non-compliance with the above shall constitute cause for rejection and for equipment already accepted by the Government, it shall be the obligation of the contractor to make necessary corrections as approved by the procuring activity.

*4.3 Production Sample Tests - One of the first 10 production equipments shall be selected and sent at the contractor's expense to a designated Government laboratory for tests. This equipment shall be selected by the procuring activity after the equipment has successfully passed all individual tests. The preproduction sample shall not be selected for this test.

4.3.1 Scope of Tests - This equipment may be subjected to any and all tests the procuring activity deems necessary to assure that the production equipment is equivalent to the previously approved preproduction sample in design, construction, workmanship, performance and quality and that it meets all applicable requirements.

*4.3.2 Accessory Material - In addition to the complete equipment submitted for production sample tests the contractor shall also submit the accessory material and design and test data specified in Specification MIL-E-5400. This information shall indicate the physical and electrical characteristics of the equipment and establish the equipment's compliance with applicable requirements.

*4.3.3 Production Sample Approval - Approval of the production sample shall be by the procuring activity upon satisfactory completion of all tests. Any design, material or performance

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:32:47Z
Check the source to verify that this is the current version before use.

defect made evident during this test shall be corrected by the contractor to the satisfaction of the procuring activity. Failure of the production sample to pass any of the tests shall be cause for deliveries of equipment under the contract to cease until proper corrective action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring activity.

*4.3.4 Reconditioning of Production Test Sample - On completion of the production sample test the equipment shall be reworked by the contractor by replacing all wear or damaged items. After reworking the contractor shall resubmit the equipment for acceptance.

4.4 Acceptance Tests - The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the supervision of the government inspector. Contractors not having testing facilities satisfactory to the procuring activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. The contractor shall furnish test reports showing quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

(1) Individual Tests
(2) Sampling Tests
(3) Reliability Assurance Tests
(4) Special Tests

4.4.1 Individual Tests - Each equipment submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests:

(1) Examination of Product
(2) Operational Test
(3) Manufacturing Run-In Test

4.4.1.1 Examination of Product - Each equipment shall be examined carefully to determine that the material and workmanship requirements have been met.

4.4.1.2 Operational Test - Each equipment shall be operated long enough to permit the equipment temperature to stabilize and to check sufficient characteristics and record adequate data to assure satisfactory equipment operation.

4.4.1.3 Manufacturing Run-In Test - Each equipment shall be operated under the conditions specified herein for a period of 6 hours without failure. A failure shall be defined as anything which causes malfunctioning of equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

Temperature	Ambient Room
Humidity	Ambient Room
Vibration	Any selected frequency within the range of 20 to 30 CPS (excluding resonant points) and a minimum amplitude of ± 3 G'S

The equipment shall be vibrated (without vibration isolators) for a period of 10 minutes prior to the beginning of the 6 hour period of operation. Where feasible, the equipment shall be operated during this vibration period for the purpose of detecting flaws and imperfect workmanship. Operation within the specified limits of satisfactory performance is not necessarily required during the vibration period. The direction of vibration should be vertical to the normal mounting plane for 5 minutes and

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:22Z
Check the source to verify that this is the current version before use.

lateral to that plane for 5 minutes. Where it is not feasible to vibrate the equipment in 2 directions the vertical direction shall be used. During the 6-hour period of operation following the 10-minute vibration period, the equipment shall be mechanically cycled periodically through its various phases of operation. Should a failure occur, it should be repaired and the test started over, except that the 10-minute vibration period need not be repeated when it is certain the failure was not a result of the vibration. Should repetitive failures occur, corrective action shall be taken to eliminate this defect from future equipment. A record shall be kept of all failures. The 6-hour period specified above may be composed of two 3-hour periods to conform with standard working hours.

*4.4.2 Sampling Tests - Equipments selected for sampling tests shall first have passed the individual tests. Equipments shall be selected for sampling tests by the government inspector in accordance with the following: (Sampling Tests shall not be conducted unless Reliability Assurance Tests of 4.4.3 are deleted by contractual action.)

Quantity of Equipments Offered for Acceptance	Quantity to be Selected For Sampling Test
First 10	0
Next 50	1
Next 75	1
Next 100	1
	1 for each additional 200 or fraction thereof

4.4.2.1 Scope of Tests - As a minimum, each equipment selected for sampling tests shall be subjected to the following tests:

(1) Complete operational test at ambient room conditions, making all necessary measurements to assure that all applicable specification requirements have been met.

(2) Operational test at certain environmental conditions. The conditions may vary for each equipment tested and should be based on results of the preproduction, production and special tests.

(3) Manufacturing run-in test specified in 4.4.1.3 except that the test duration shall be 120 hours with no restriction on the number of failures. However, each failure shall be analyzed as to cause and remedial action necessary to reduce the possibility of its recurrence in future equipment.

*4.4.3 Reliability Assurance Tests - Reliability assurance tests shall be conducted as required by Specification MIL-R-23094. Equipments selected for reliability assurance tests shall first have passed the individual tests.

*4.4.3.1 Reliability Procedure - For the reliability Qualification Plan, as outlined in Specification MIL-R-23094, Procedure I shall be used. For the Reliability Sampling Plan Procedure I shall be used.

*4.4.3.2 Test Level - The Test Level shall be III from Table I of Specification MIL-R-23094. The equipment shall be operated during the heating period of each cycle.

*4.4.3.3 Accept-Reject Criteria - Figure 11 of Specification MIL-R-23094 shall be used to determine the accept-reject criteria for the Reliability Qualification Test Plan. Figure 13 of Specification MIL-R-23094 shall be used to determine the accept-reject criteria for the reliability Sampling Test Plan.

*4.4.3.4 Length of Heat Portion of Cycle - After stabilization at the high temperature limit required by the test level, the equipment shall be operated at least 2 hours during each cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10 08:11:38 EST
Check the source to verify that this is the current version before use.

*4.4.3.5 Performance Characteristics to be Measured -

Characteristic	Spec requirement	Acceptance requirement (if lower)	Time in cycle that measurement is to be made
Doppler mode ground track output	1%	-	Any time in
Doppler mode wind output	1-1/2 knots ± 2 knots or (3/4% Vh + 3/4% Vd + 3/4% As) ± 2 knots	-	cycle during which equipment is "on"

*4.4.3.6 Failure Criteria - In addition to the requirements of Specification MIL-R-23094, the following requirements shall be used to determine when a failure has occurred during the test:

(1) Whenever performance characteristics fall below the acceptance requirements (paragraph 4.4.3.5) at least one failure has occurred. If subsequent analysis reveals that several parts have deteriorated each shall be counted as a failure unless one caused the other parts to fail.

4.4.4 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from equipments previously subjected to the sampling or reliability assurance tests.

4.4.4.1 Special Test Schedule - Selection of equipments for special test shall be made as follows:

(1) On an early equipment after an engineering change.

(2) Whenever failure reports or other information indicate additional equipments should be tested. (This will be determined by the procuring activity.)

*4.4.4.2 Scope of Tests - Special tests shall consist of such tests as are approved by the procuring activity. Test procedures previously approved for the preproduction tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring activity for approval prior to conducting the tests.

4.4.5 Equipment Failure - Should a failure occur during either the sampling, reliability assurance or special tests, the following action shall be taken:

(1) Determine the cause of failure.

(2) Determine if the failure is an isolated case or design defect.

(3) Submit to the procuring activity for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occurring in future tests.

(4) Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

*4.5 Life Test - The contractor shall furnish all samples and shall be responsible for accomplishing the life test. The test shall be of 300-hours duration and shall be conducted on equipments that have passed the individual test. The life test shall be performed under the conditions specified in 4.5.1. The life test sample shall be selected by the government inspector in accordance with the following. (Equipments which have successfully passed the Production Sample Test, Sampling

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:22Z
Check the source to verify that this is the current version before use.

Tests, Reliability Tests, or Special Tests may be selected for life tests.) When reliability tests are conducted, the life test may be omitted if, during the reliability tests, a quantity of equipments equal to, or more than, that listed below receive at least 300 hours each of test time.

Quantity of Equipments Offered for Acceptance	Quantity to be Selected for Life Test
First 25	1
Next 175	1
Next 300	1
	1 for each additional 500 or fraction thereof

4.5.1 Test Conditions - The life test shall be conducted under the following simulated service conditions:

Temperature	Normal room
Altitude	Normal ground (0-5000 Ft)
Humidity	Room ambient
AC Voltage	115 ± 5 volts (at lowest applicable frequency)
DC Voltage	27.0 ± 2.0 volts

4.5.2 Test Periods - The test may be run continuously or intermittently. Any period of operation shall be of sufficient duration to permit the equipment temperature to stabilize. Periodically, the equipment shall be turned on and off several times and put through its various phases of operation.

4.5.3 Performance Check - At approximately 8-hour intervals during the test, a limited performance check shall be made. The performance check proposed by the contractor shall be subject to approval by the procuring activity.

4.5.4 Test Data - The contractor shall keep a daily record of the performance of the equipment, making particular note of any deficiencies or failures. In the event of part failures, the defective part shall be replaced and the operation resumed for the balance of the test period. A record shall be kept of all failures throughout the test, including all tube failures. This record shall indicate the following:

(1) Part type number
(2) The circuit reference symbol number
(3) The part function
(4) Name of the manufacturer
(5) Nature of the failure
(6) The number of hours which the part operated prior to failure

4.5.4.1 Failure Report - In the event of a failure, the government inspector shall be notified immediately. A report shall be submitted to the procuring activity upon completion of the test. In this report, the contractor shall propose suitable and adequate design or material corrections for all failures which occurred. The procuring activity will review such proposals and determine whether they are acceptable.

4.5.5 Reconditioning of Life Test Samples - An equipment which has been subjected to the life test shall be reconditioned as follows:

(1) On completion of the life test, the equipment shall be reworked by the contractor by replacing all "wear" items. The "wear" items shall be determined by agreement between the contractor and the procuring activity.

(2) After reworking, the contractor may resubmit the equipment for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T08:13:24Z
Check the source to verify that this is the current version before use.

4.6 Test Procedures - The procedures used for conducting preproduction tests, acceptance tests and life tests shall be prepared by the contractor and submitted to the procuring activity for review and approval. The right is reserved by the procuring activity or the government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification or the contract. Specification MIL-T-18303 shall be used as a guide for preparation of test procedures. When test procedures are available from previous contracts such procedures may be used when approved by the procuring activity.

*4.7 Reconditioning of Tested Equipment - Equipment which has been subjected to acceptance and life tests shall be reconditioned by the contractor by replacing all wear or damaged items. *After reworking the contractor shall resubmit the equipment for acceptance.*

*4.8 Presubmission Testing - No item, part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

*4.9 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. *Before resubmitting, full* particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the government inspector.

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with Specification MIL-E-17555.

6. NOTES

*6.1 Intended Use - The computer set, navigation, described by this specification is intended to functionally replace the navigational computer group AN/ASA-13A less the ID-499/ASA-13. It accepts signals from a doppler velocity sensor, airspeed transducer and compass system and computes ground track, N-S and E-W components of distance traveled, and wind.

*6.2 Test Values - Normal and limiting values of performance data shall be determined at input voltages of 27.5 ± 0.5 V DC and 115 ± 1.0 V AC as applicable. These data are to be used in testing the equipment at installation points for compliance with a minimum acceptable standard of performance.

*6.3 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in Specification MIL-E-5400, it is desired their use be investigated. When investigation shows advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

*6.4 As a general rule non-repairable subassemblies should be encapsulated or hermetically sealed. The number of connections internal to the subassembly should be held to a minimum. *Detail parts tolerances and ratings should be so selected that the life of the subassembly is greater* than that of a similar repairable one. With few exceptions (such as high voltage power supplies), the non-repairable subassembly should evidence a mean-time-to-failure greater than 5000 hours, and for many applications this figure must be nearer 50,000 hours.

*6.5 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:27Z
Check the source to verify that this is the current version before use.

(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.

(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

*6.6 The parentheses (*), when used in the type designation, will be deleted or replaced by either a number or letter furnished by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.3.8. The complete type number shall be used on nameplates, shipping records and instruction books, as applicable.

*6.7 Items of Equipment - The equipment covered by this specification shall consist of the following items:

ITEM	TYPE DESIGNATION	APPL. PARA.
Control - Indicator	C-3510(*)/AYK-2	3.5.1
Computer, Navigational	CP-592(*)/AYK-2	3.5.2
Mount	MT-3339(*)AYK-2	3.5.2.7

*6.8 Applicable Documents -

SPECIFICATIONS

Military

MIL-C-172	Cases; bases, mounting; and mounts, vibration (for use with electronic equipment in aircraft)
MIL-E-4682	Electron tubes and transistors, choice and application of
MIL-W-5088	Wiring; aircraft, installation of
MIL-E-5400	Electronic equipment, aircraft, general specification for
MIL-T-5422	Testing, environmental, aircraft electronics equipment
MIL-I-6181	Interference control requirements, aircraft equipment
MIL-C-6781	Control panel; aircraft equipment, rack or console mounted
MIL-P-7788	Plate, plastic, lighting
MIL-M-7793	Meter, time totalizing
MIL-E-17555	Electronic and electrical equipment and associated repair parts, preparation for delivery of
MIL-T-18303	Test Procedures; preproduction and inspection, for aircraft electronic equipment, format for

Source: https://assist.dla.mil -- Downloaded: 2026-02-08T18:24:22Z
Check the source to verify that this is the current version before use.

MIL-N-18307	Nomenclature and name plates for aeronautical electronic and associated equipment
MIL-R-23094	Reliability assurance for production acceptance of avionic equipment, general specification

STANDARDS

Military

MIL-STD-704	Electric power, aircraft, characteristics and utilization of
MS17322-6	Meter, time totalizing, 115 volt, 400 cycle

PUBLICATIONS

Bureau of Naval Weapons

EI-441	Avionics Installation Instructions for Navigational Computer Set AN/AYK-2
ET-441A	Avionics Bench, Preflight and Flight Test Instructions for Installation of Navigational Computer Set AN/AYK-2

*6.8.1 Availability of Documents

(1) When requesting specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code 105, 5801 Tabor Avenue, Philadelphia, Pennsylvania.

*6.9 Ordering Data - Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(1) Title, number, and date of this specification.

(2) Selection of applicable levels of packaging and packing (see 5.1).

(3) Data requirements (see 3.6).

6.10 Asterisk - An asterisk "" preceding a paragraph number denotes paragraphs where changes have been made from the previous issue. This has been done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the asterisk notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T18:24:47Z
Check the source to verify that this is the current version before use.

*6.11 Associated Equipment - The equipment shall operate with the following associated equipment which shall not be supplied as part of the equipment:

Navigation Set, Radar	AN/APN-122(V)
Navigation Set, Radar	AN/APN-130(V)
Navigation Set, Radar	AN/APN-153(V)
Compass System, Type	MA-1
	MF-1
Plotting Board, Tactical Display	PT-396/AS
Plotting Board, Tactical Display	PT-429/A
Display-Plotting Board Group	OA-1768/ASA-13
Airspeed Transmitter	T-349/APA-57B
Airspeed Transmitter	T-570/ASA-13
Position Indicator	ID-499/ASA-13
Indicator Group	AN/ASA-16

NOTICE - When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:47Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-C-22704B, dated 15 February 1965 does not include foldouts for page 18 figure 1. Please call the ASSIST SERVICE DESK at 215-737-8000 for copies of this foldout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:27Z
Check the source to verify that this is the current version before use.

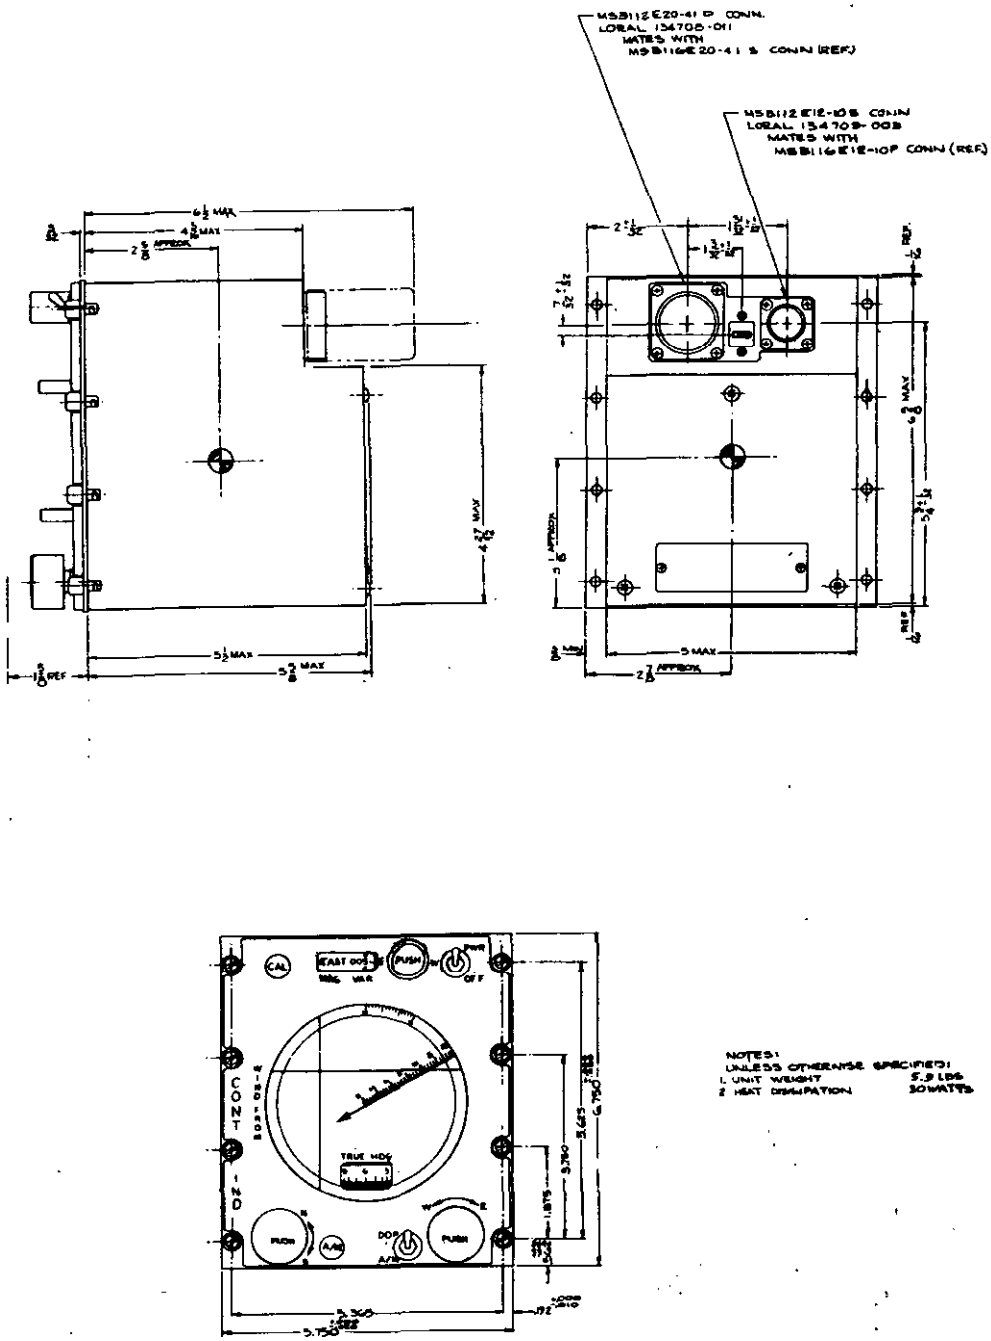


Figure 2. Control-Indicator C-3510/AYK-2, Outline Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:22Z
Check the source to verify that this is the current version before use.

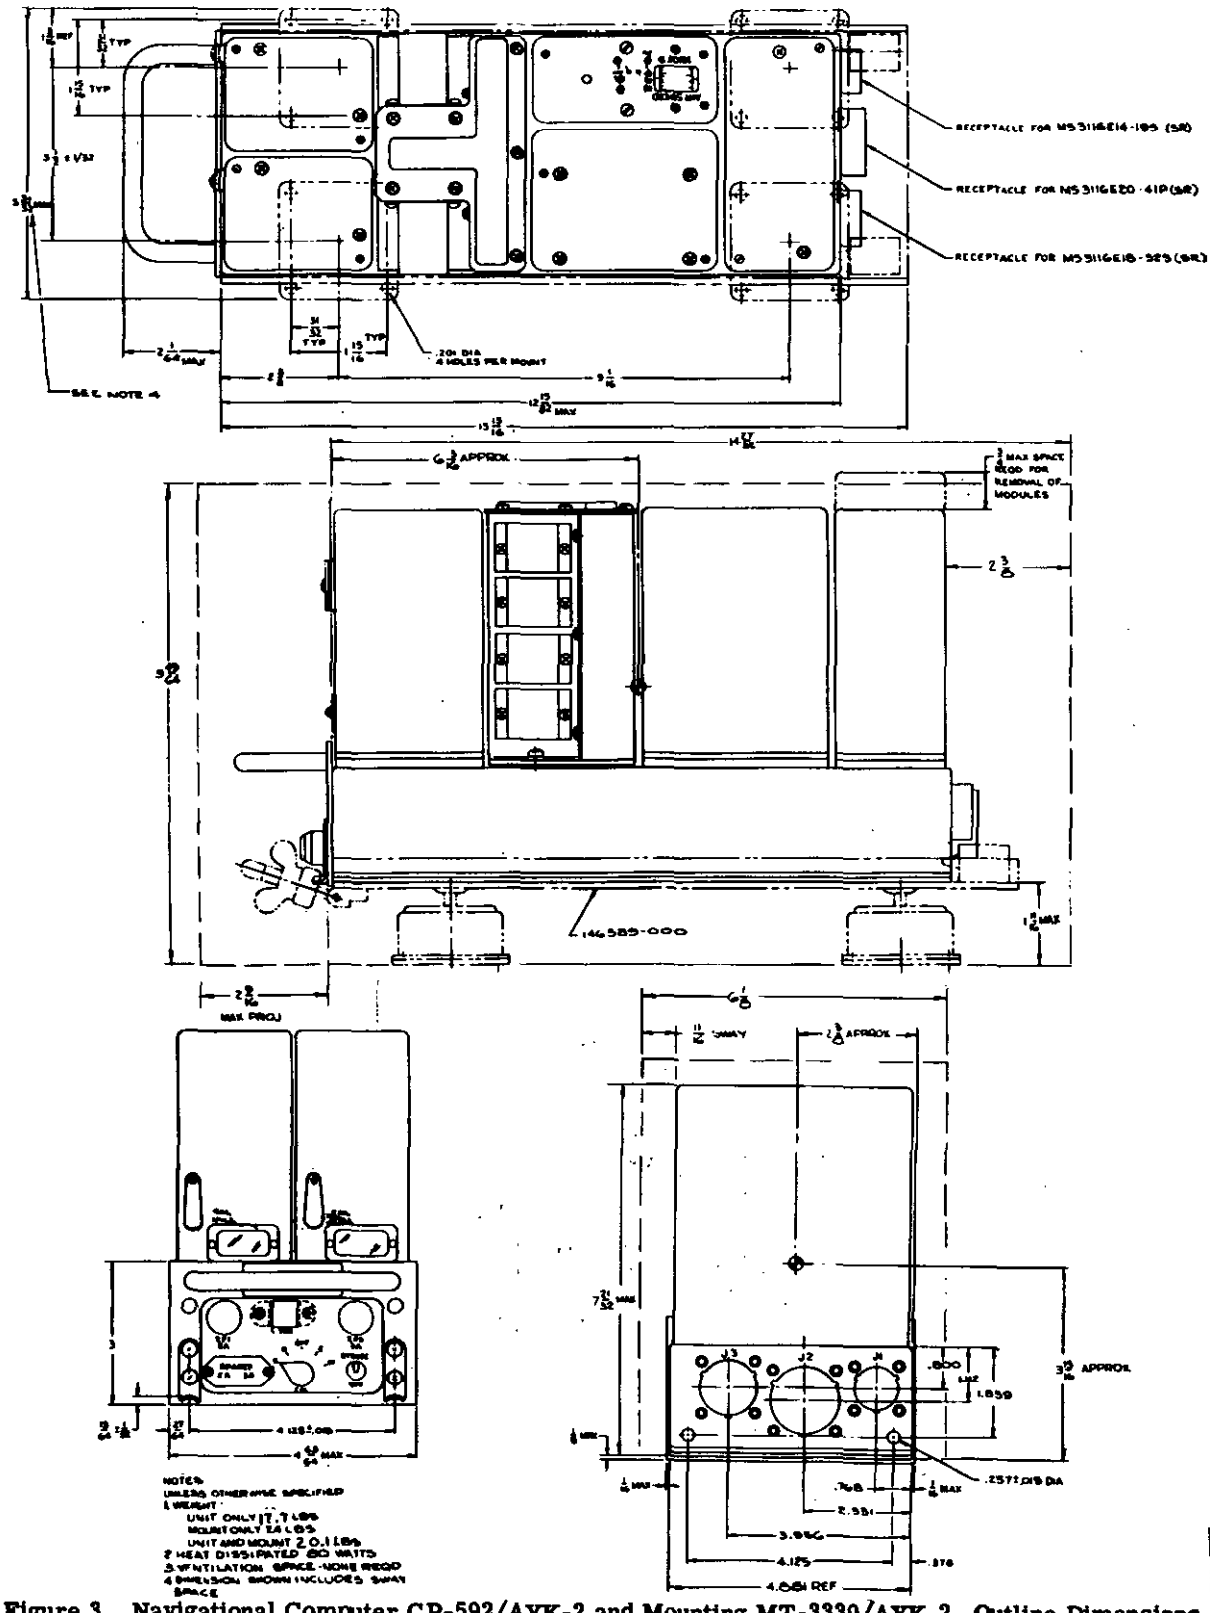


Figure 3. Navigational Computer CP-592/AYK-2 and Mounting MT-3339/AYK-2, Outline Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-02-08T18:24:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards
Department (ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT *REQUIREMENT CONSIDERED TOO RIGID*

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE: 1973—714-866/3983 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T13:24:47Z
Check the source to verify that this is the current version before use.