NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-22710/11E
4 October 1982
SUPERSEDING
MIL-S-22710/11D
21 May 1973

PERFORMANCE SPECIFICATION SHEET

SWITCHES, ROTARY (PRINTED CIRCUIT),
(THUMBWHEEL SWITCH ASSEMBLY, INTEGRAL BEZEL,
NONSEALED, ILLUMINATED OR NONILLUMINATED),
STYLE SRPC11

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of Specification MIL-S-22710.

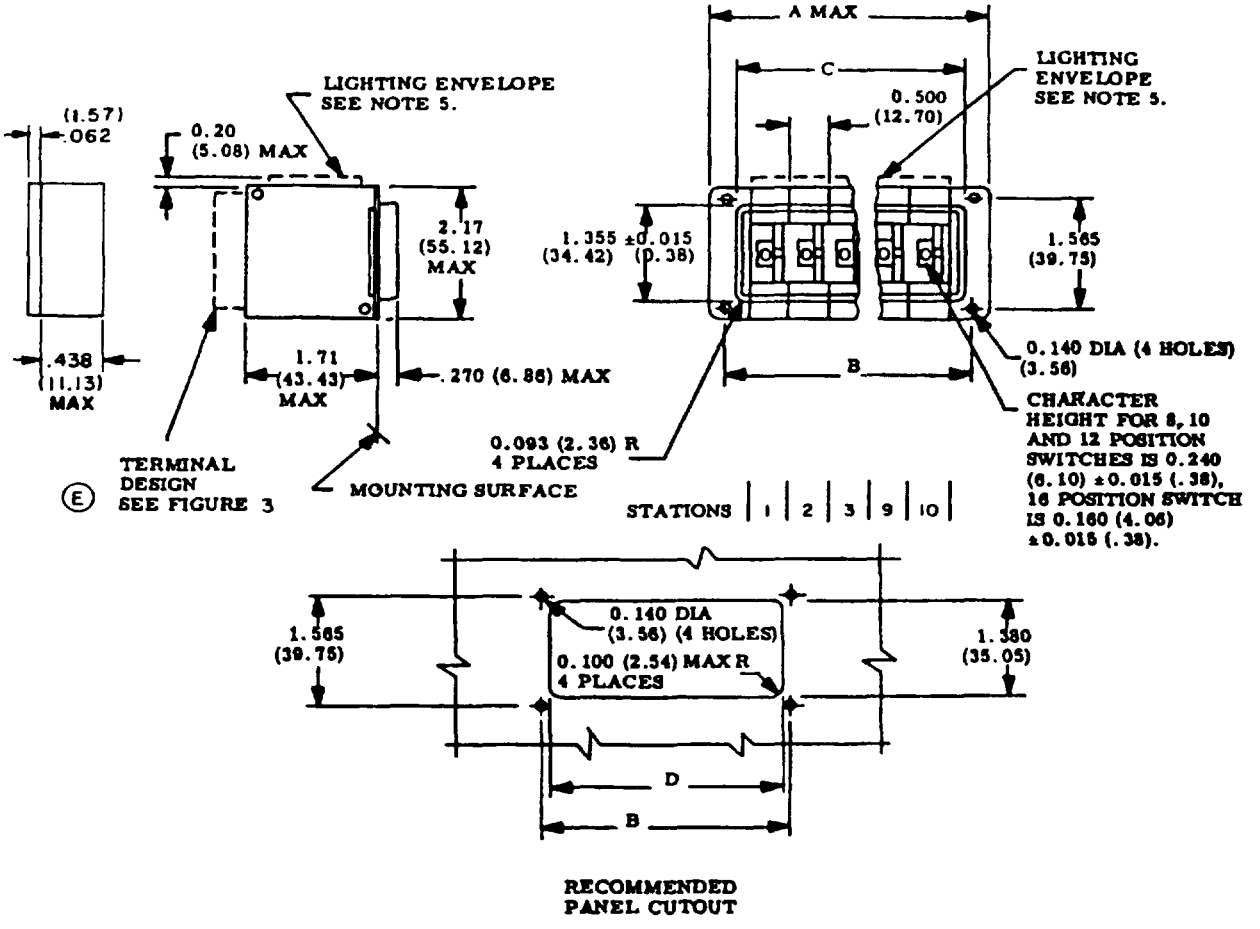

Ⓔ FIGURE 1. Style SRPC11 switch and panel cutout (unshielded switch).

Ⓔ denotes changes

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Number of stations	Dimensions			
	A (MAX)	B	C	D
1	1.50 (38.10)	1.075 (27.31)	0.870 (22.10)	0.890 (22.61)
2	2.00 (50.80)	1.575 (40.01)	1.370 (34.80)	1.390 (35.31)
3	2.50 (63.50)	2.075 (52.71)	1.870 (47.50)	1.890 (48.01)
4	3.00 (76.20)	2.575 (65.41)	2.370 (60.20)	2.390 (60.71)
5	3.50 (88.90)	3.075 (78.11)	2.870 (72.90)	2.890 (73.41)
6	4.00 (101.60)	3.575 (90.81)	3.370 (85.60)	3.390 (86.11)
7	4.50 (114.30)	4.075 (103.51)	3.870 (98.30)	3.890 (98.81)
8	5.00 (127.00)	4.575 (116.21)	4.370 (111.00)	4.390 (111.51)
9	5.50 (139.70)	5.075 (128.91)	4.870 (123.70)	4.890 (124.21)
10	6.00 (152.40)	5.575 (141.61)	5.370 (136.40)	5.390 (136.91)


NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only are are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerance is ±0.010 (0.25).
5. Applicable to illuminated switches only. Top relampable switch shown. Allowance for lighting terminals for externally replaceable lamps, when internal lighting is specified.

FIGURE 1. Style SRPC11 switch and panel cutout (unshielded switch)-Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

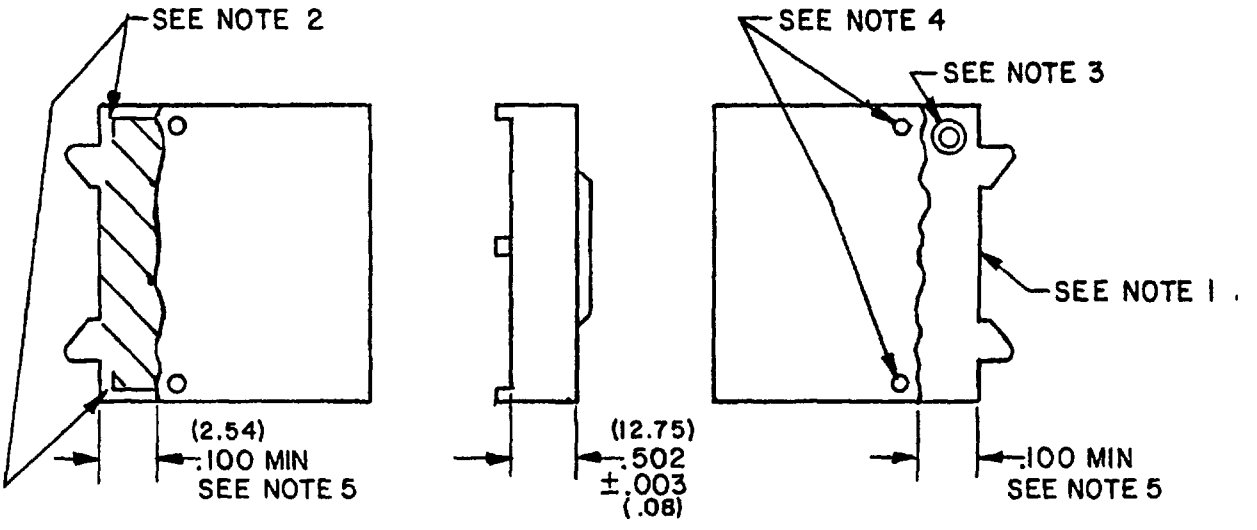


Ⓔ NOTES:
1. Black matte finish over silver - for all surfaces exposed from front of panel.
2. No color coating to be applied over silver in this area (both corners).
3. No paint applied to surface, .25/.35 diameter.
4. .062 ±.002 DIA drilled out holes.
5. Minimum silvered surface, measure, measured from mounting surface.

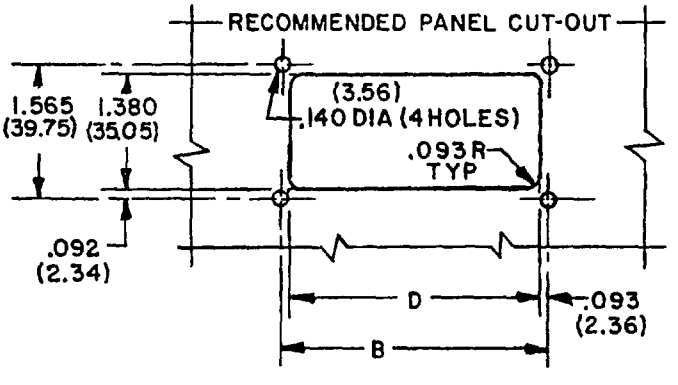

No. of Modules	Dimensions	
	D	B
1	.896 (22.76)	1.079 (27.41)
2	1.398 (35.51)	1.581 (40.16)
3	1.900 (48.26)	2.083 (52.91)
4	2.402 (61.01)	2.585 (65.66)
5	2.904 (73.76)	3.087 (78.41)
6	3.406 (86.51)	3.589 (91.16)
7	3.908 (99.26)	4.091 (103.91)
8	4.410 (112.01)	4.593 (116.66)
9	4.912 (124.76)	5.095 (129.41)
10	5.414 (137.52)	5.597 (142.16)

Ⓔ FIGURE 2. RFI Shielded switch and panel cutout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

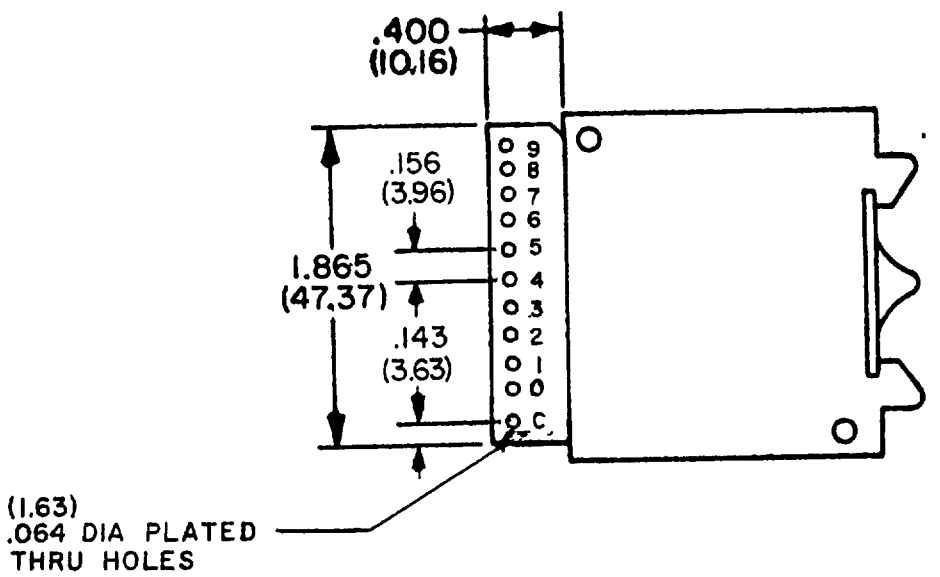


MODULE A, A1, A2, A3, A4, or A5 (E)

TRUTH TABLE (Circuit configuration 1) 36° INDEXING	
DIAL MARKING	COMMON C CONN. TO:
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

FIGURE 3. Module and circuit configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

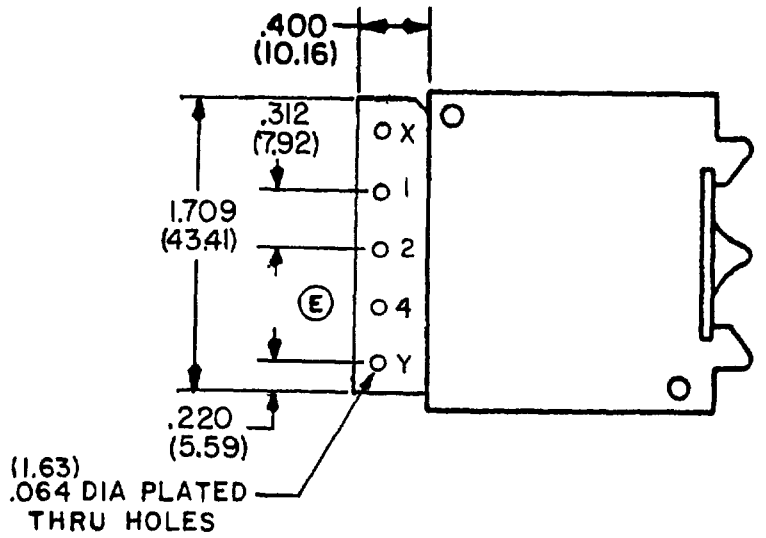


(E) MODULE B, B1, B2, B3, B4 or B5


TRUTH TABLE (Circuit configuration 2) 45° INDEXING			
DIAL MARKING	COMMON X(●)& Y(O) CONN. TO:		
	1	2	4
0	O	O	O
1	●	O	O
2	O	●	O
3	●	●	O
4	O	O	●
5	●	O	●
6	O	●	●
7	●	●	●

FIGURE 3. Module and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

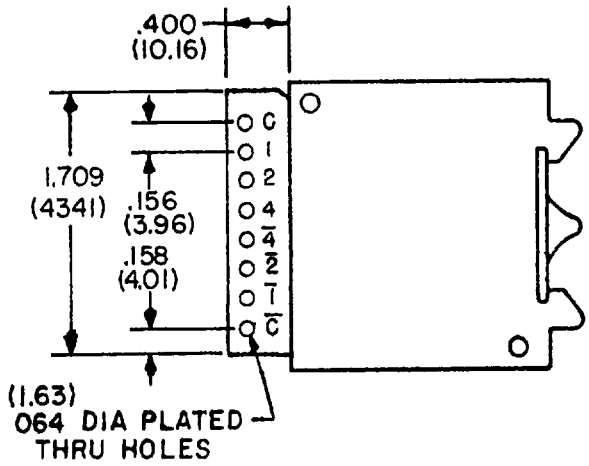

Ⓔ MODULE C, C1, C2, C3, C4 or C5

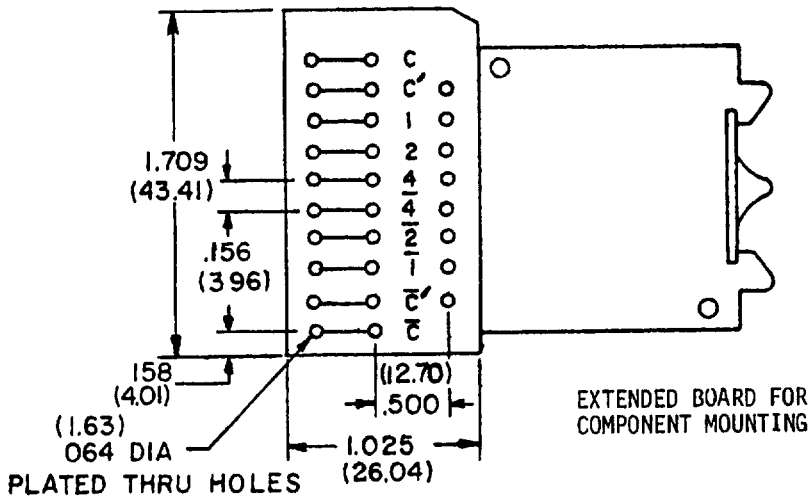


Ⓔ MODULE D, D1, D2, D3, D4 or D5

TRUTH TABLE
(Circuit configuration 3)
45 INDEXING


DIAL MARKING	COMMON C CONN. TO:			COMMON $\bar{C}$ CONN. TO:			Ⓔ
	1	2	4	$\bar{1}$	$\bar{2}$	$\bar{4}$	
0				●	●	●	
1	●				●	●	
2		●		●		●	
3	●	●				●	
4			●	●	●		
5	●		●		●		
6		●	●	●			
7	●	●	●				

FIGURE 3. Module and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

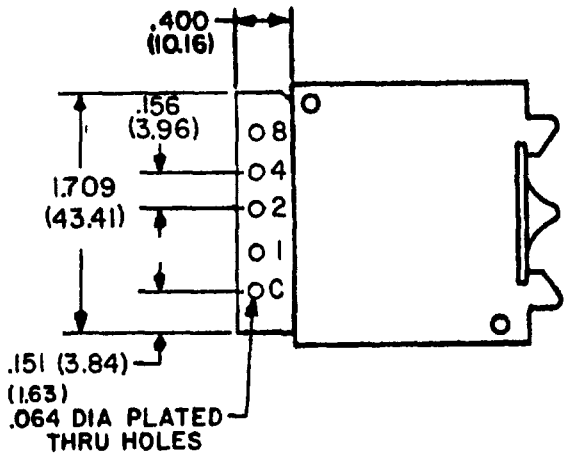

Ⓔ MODULE E, E1, E2, E3, E4 or E5

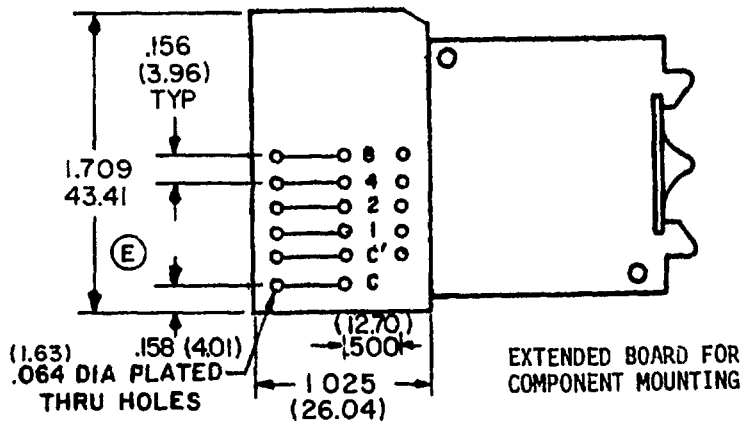


Ⓔ MODULE F, F1, F2, F3, F4 or F5

TRUTH TABLE (Circuit configuration 4) 36° INDEXING				
DIAL MARKING	COMMON C CONN. TO:			
	1	2	4	8
0				
1	●			
2		●		
3	●	●		
4			●	
5	●		●	
6		●	●	
7	●	●	●	
8				●
9	●			●

FIGURE 3. Module and circuit configuration - Continued.

Source: https://assist.dla.mil --Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

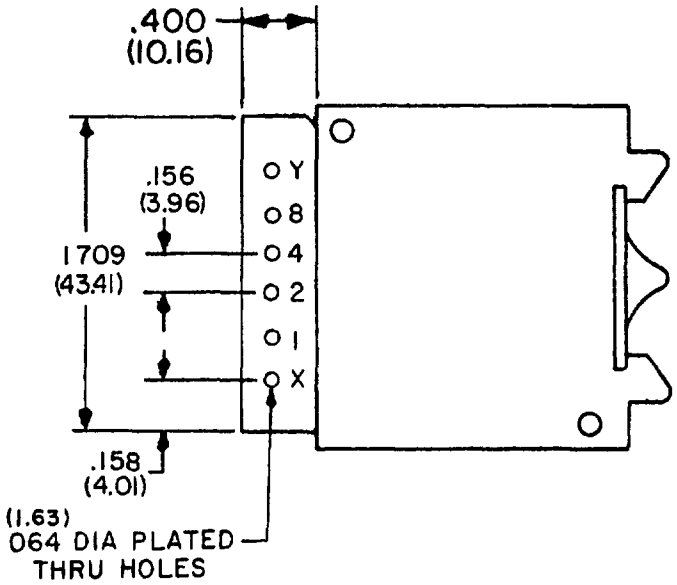


(E) MODULE G, G1, G2, G3, G4 or G5


TRUTH TABLE (Circuit configuration 5) 36° INDEXING				
DIAL MARKING	COMMON X(●)&Y(O) CONN TO:			
	1	2	4	8
0	O	O	O	O
1	●	O	O	O
2	O	●	O	O
3	●	●	O	O
4	O	O	●	O
5	●	O	●	O
6	O	●	●	O
7	●	●	●	O
8	O	O	O	●
9	●	O	O	●

FIGURE 3. Module and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

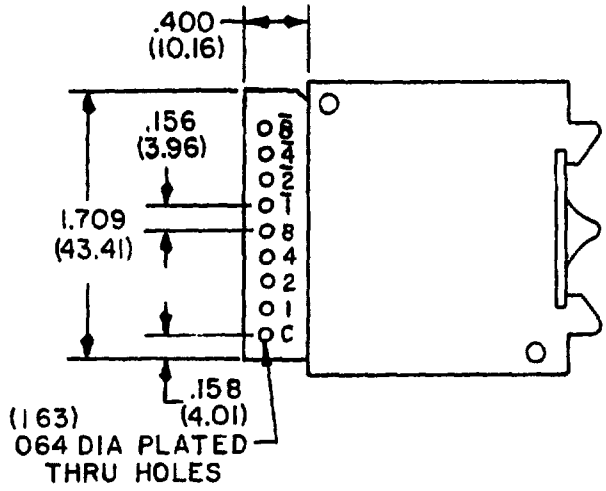

Ⓔ MODULE H, H1, H2, H3, H4 or H5

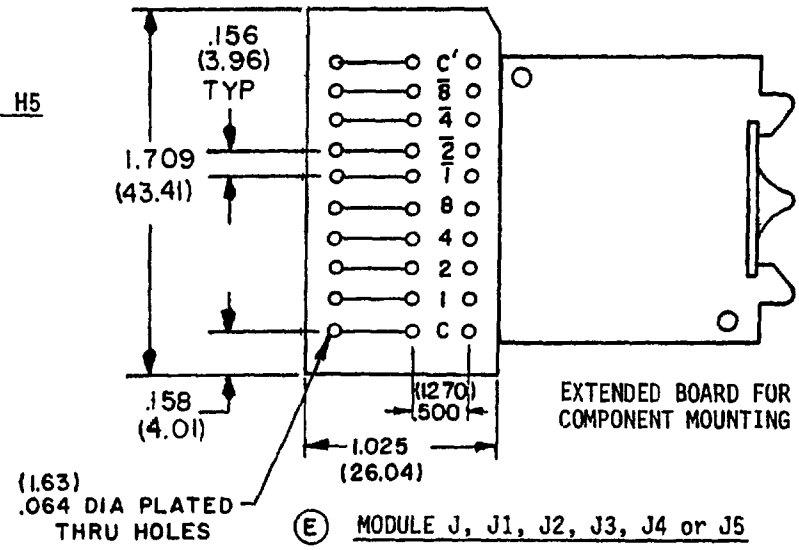

Ⓔ MODULE J, J1, J2, J3, J4 or J5

TRUTH TABLE (Circuit configuration 6) 36° INDEXING								
DIAL MARKING	COMMON C CONN. TO:							
	1	2	4	8	$\bar{1}$	$\bar{2}$	$\bar{4}$	$\bar{8}$
0					●	●	●	●
1	●					●	●	●
2		●			●		●	●
3	●	●					●	●
4			●		●	●		●
5	●		●			●		●
6		●	●		●			●
7	●	●	●					●
8				●	●	●	●	
9	●			●		●	●	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm. Ⓔ
4. Where specified, C' is common to C and is used for component mounting.

FIGURE 3. Module and circuit configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE I. Module description. 1/

Module number	Circuit configuration	Dial		Illumination	EMI/RFI shielded
		Background	Marking	Color	
A	1	Black Opaque	White Opaque	N/A	No
A1	1	"	White Translucent	Red	No
A2	1	"	White Translucent	Clear	No
A3	1	"	White Opaque	N/A	Yes
A4	1	"	White Translucent	Red	Yes
A5	1	"	White Translucent	Clear	Yes
B	2	"	White Opaque	N/A	No
B1	2	"	White Translucent	Red	No
B2	2	"	White Translucent	Clear	No
B3	2	"	White Opaque	N/A	Yes
B4	2	"	White Translucent	Red	Yes
B5	2	"	White Translucent	Clear	Yes
C	3	"	White Opaque	N/A	No
C1	3	"	White Translucent	Red	No
C2	3	"	White Translucent	Clear	No
C3	3	"	White Opaque	N/A	Yes
C4	3	"	White Translucent	Red	Yes
C5	3	"	White Translucent	Clear	Yes
D	3	"	White Opaque	N/A	No
D1	3	"	White Translucent	Red	No

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE I. Module description - Continued. 1/

Module number	Circuit configuration	Dial		Illumination	EMI/RFI Shielded
		Background	Marking	Color	
D2	3	Black Opaque	White Translucent	Clear	No
D3	3	"	White Opaque	N/A	Yes
D4	3	"	White Translucent	Red	Yes
D5	3	"	White Translucent	Clear	Yes
E	4	"	White Opaque	N/A	No
E1	4	"	White Translucent	Red	No
E2	4	"	White Translucent	Clear	No
E3	4	"	White Opaque	N/A	Yes
E4	4	"	White Translucent	Red	Yes
E5	4	"	White Translucent	Clear	Yes
F	4	"	White Opaque	N/A	No
F1	4	"	White Translucent	Red	No
F2	4	"	White Translucent	Clear	No
F3	4	"	White Opaque	N/A	Yes
F4	4	"	White Translucent	Red	Yes
F5	4	"	White Translucent	Clear	Yes
G	5	"	White Opaque	N/A	No
G1	5	"	White Translucent	Red	No
G2	5	"	White Translucent	Clear	No

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE I. Module description - Continued. 1/

Module number	Circuit configuration	Dial		Illumination	EMI/RFI Shielded
		Background	Marking	Color	
G3	5	Black Opaque	White Opaque	N/A	Yes
G4	5	"	White Translucent	Red	Yes
G5	5	"	White Translucent	Clear	Yes
H	6	"	White Opaque	N/A	No
H1	6	"	White Translucent	Red	No
H2	6	"	White Translucent	Clear	No
H3	6	"	White Opaque	N/A	Yes
H4	6	"	White Translucent	Red	Yes
H5	6	"	White Translucent	Clear	Yes
J	6	"	White Opaque	N/A	No
J1	6	"	White Translucent	Red	No
J2	6	"	White Translucent	Clear	No
J3	6	"	White Opaque	N/A	Yes
J4	6	"	White Translucent	Red	Yes
J5	6	"	White Translucent	Clear	Yes

1/ Switch modules are not procurable by themselves, but are part of the switch assembly. See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Switch assembly.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
001	A									
002	A	A								
003	A	A	A							
004	A	A	A	A						
005	A	A	A	A	A					
006	A	A	A	A	A	A				
007	A	A	A	A	A	A	A			
008	A	A	A	A	A	A	A	A		
009	A	A	A	A	A	A	A	A	A	
010	A	A	A	A	A	A	A	A	A	A
011	A1									
012	A1	A1								
013	A1	A1	A1							
014	A1	A1	A1	A1						
015	A1	A1	A1	A1	A1					
016	A1	A1	A1	A1	A1	A1				
017	A1	A1	A1	A1	A1	A1	A1			
018	A1	A1	A1	A1	A1	A1	A1	A1		
019	A1	A1	A1	A1	A1	A1	A1	A1	A1	
020	A1	A1	A1	A1	A1	A1	A1	A1	A1	A1
021	A2									
022	A2	A2								
023	A2	A2	A2							
024	A2	A2	A2	A2						
025	A2	A2	A2	A2	A2					
026	A2	A2	A2	A2	A2	A2				
027	A2	A2	A2	A2	A2	A2	A2			
028	A2	A2	A2	A2	A2	A2	A2	A2		
029	A2	A2	A2	A2	A2	A2	A2	A2	A2	
030	A2	A2	A2	A2	A2	A2	A2	A2	A2	A2
031	B									
032	B	B								
033	B	B	B							
034	B	B	B	B						
035	B	B	B	B	B					
036	B	B	B	B	B	B				
037	B	B	B	B	B	B	B			
038	B	B	B	B	B	B	B	B		
039	B	B	B	B	B	B	B	B	B	
040	B	B	B	B	B	B	B	B	B	B
041	B1									
042	B1	B1								
043	B1	B1	B1							
044	B1	B1	B1	B1						
045	B1	B1	B1	B1	B1					
046	B1	B1	B1	B1	B1	B1				
047	B1	B1	B1	B1	B1	B1	B1			
048	B1	B1	B1	B1	B1	B1	B1	B1		
049	B1	B1	B1	B1	B1	B1	B1	B1	B1	
050	B1	B1	B1	B1	B1	B1	B1	B1	B1	B1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
051	B2									
052	B2	B2								
053	B2	B2	B2							
054	B2	B2	B2	B2						
055	B2	B2	B2	B2	B2					
056	B2	B2	B2	B2	B2	B2				
057	B2	B2	B2	B2	B2	B2	B2			
058	B2	B2	B2	B2	B2	B2	B2	B2		
059	B2	B2	B2	B2	B2	B2	B2	B2	B2	
060	B2	B2	B2	B2	B2	B2	B2	B2	B2	B2
061	C									
062	C	C								
063	C	C	C							
064	C	C	C	C						
065	C	C	C	C	C					
066	C	C	C	C	C	C				
067	C	C	C	C	C	C	C			
068	C	C	C	C	C	C	C	C		
069	C	C	C	C	C	C	C	C	C	
070	C	C	C	C	C	C	C	C	C	C
071	C1									
072	C1	C1								
073	C1	C1	C1							
074	C1	C1	C1	C1						
075	C1	C1	C1	C1	C1					
076	C1	C1	C1	C1	C1	C1				
077	C1	C1	C1	C1	C1	C1	C1			
078	C1	C1	C1	C1	C1	C1	C1	C1		
079	C1	C1	C1	C1	C1	C1	C1	C1	C1	
080	C1	C1	C1	C1	C1	C1	C1	C1	C1	C1
081	C2									
082	C2	C2								
083	C2	C2	C2							
084	C2	C2	C2	C2						
085	C2	C2	C2	C2	C2					
086	C2	C2	C2	C2	C2	C2				
087	C2	C2	C2	C2	C2	C2	C2			
088	C2	C2	C2	C2	C2	C2	C2	C2		
089	C2	C2	C2	C2	C2	C2	C2	C2	C2	
090	C2	C2	C2	C2	C2	C2	C2	C2	C2	C2
091	D									
092	D	D								
093	D	D	D							
094	D	D	D	D						
095	D	D	D	D	D					
096	D	D	D	D	D	D				
097	D	D	D	D	D	D	D			
098	D	D	D	D	D	D	D	D		
099	D	D	D	D	D	D	D	D	D	
100	D	D	D	D	D	D	D	D	D	D

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
101	D1									
102	D1	D1								
103	D1	D1	D1							
104	D1	D1	D1	D1						
105	D1	D1	D1	D1	D1					
106	D1	D1	D1	D1	D1	D1				
107	D1	D1	D1	D1	D1	D1	D1			
108	D1	D1	D1	D1	D1	D1	D1	D1		
109	D1	D1	D1	D1	D1	D1	D1	D1	D1	
110	D1	D1	D1	D1	D1	D1	D1	D1	D1	D1
111	D2									
112	D2	D2								
113	D2	D2	D2							
114	D2	D2	D2	D2						
115	D2	D2	D2	D2	D2					
116	D2	D2	D2	D2	D2	D2				
117	D2	D2	D2	D2	D2	D2	D2			
118	D2	D2	D2	D2	D2	D2	D2	D2		
119	D2	D2	D2	D2	D2	D2	D2	D2	D2	
120	D2	D2	D2	D2	D2	D2	D2	D2	D2	D2
121	E									
122	E	E								
123	E	E	E							
124	E	E	E	E						
125	E	E	E	E	E					
126	E	E	E	E	E	E				
127	E	E	E	E	E	E	E			
128	E	E	E	E	E	E	E	E		
129	E	E	E	E	E	E	E	E	E	
130	E	E	E	E	E	E	E	E	E	E
131	E1									
132	E1	E1								
133	E1	E1	E1							
134	E1	E1	E1	E1						
135	E1	E1	E1	E1	E1					
136	E1	E1	E1	E1	E1	E1				
137	E1	E1	E1	E1	E1	E1	E1			
138	E1	E1	E1	E1	E1	E1	E1	E1		
139	E1	E1	E1	E1	E1	E1	E1	E1	E1	
140	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1
141	E2									
142	E2	E2								
143	E2	E2	E2							
144	E2	E2	E2	E2						
145	E2	E2	E2	E2	E2					
146	E2	E2	E2	E2	E2	E2				
147	E2	E2	E2	E2	E2	E2	E2			
148	E2	E2	E2	E2	E2	E2	E2	E2		
149	E2	E2	E2	E2	E2	E2	E2	E2	E2	
150	E2	E2	E2	E2	E2	E2	E2	E2	E2	E2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
151	F									
152	F	F								
153	F	F	F							
154	F	F	F	F						
155	F	F	F	F	F					
156	F	F	F	F	F	F				
157	F	F	F	F	F	F	F			
158	F	F	F	F	F	F	F	F		
159	F	F	F	F	F	F	F	F	F	
160	F	F	F	F	F	F	F	F	F	F
161	F1									
162	F1	F1								
163	F1	F1	F1							
164	F1	F1	F1	F1						
165	F1	F1	F1	F1	F1					
166	F1	F1	F1	F1	F1	F1				
167	F1	F1	F1	F1	F1	F1	F1			
168	F1	F1	F1	F1	F1	F1	F1	F1		
169	F1	F1	F1	F1	F1	F1	F1	F1	F1	
170	F1	F1	F1	F1	F1	F1	F1	F1	F1	F1
171	F2									
172	F2	F2								
173	F2	F2	F2							
174	F2	F2	F2	F2						
175	F2	F2	F2	F2	F2					
176	F2	F2	F2	F2	F2	F2				
177	F2	F2	F2	F2	F2	F2	F2			
178	F2	F2	F2	F2	F2	F2	F2	F2		
179	F2	F2	F2	F2	F2	F2	F2	F2	F2	
180	F2	F2	F2	F2	F2	F2	F2	F2	F2	F2
181	G									
182	G	G								
183	G	G	G							
184	G	G	G	G						
185	G	G	G	G	G					
186	G	G	G	G	G	G				
187	G	G	G	G	G	G	G			
188	G	G	G	G	G	G	G	G		
189	G	G	G	G	G	G	G	G	G	
190	G	G	G	G	G	G	G	G	G	G
191	G1									
192	G1	G1								
193	G1	G1	G1							
194	G1	G1	G1	G1						
195	G1	G1	G1	G1	G1					
196	G1	G1	G1	G1	G1	G1				
197	G1	G1	G1	G1	G1	G1	G1			
198	G1	G1	G1	G1	G1	G1	G1	G1		
199	G1	G1	G1	G1	G1	G1	G1	G1	G1	
200	G1	G1	G1	G1	G1	G1	G1	G1	G1	G1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
201	G2									
202	G2	G2								
203	G2	G2	G2							
204	G2	G2	G2	G2						
205	G2	G2	G2	G2	G2					
206	G2	G2	G2	G2	G2	G2				
207	G2	G2	G2	G2	G2	G2	G2			
208	G2	G2	G2	G2	G2	G2	G2	G2		
209	G2	G2	G2	G2	G2	G2	G2	G2	G2	
210	G2	G2	G2	G2	G2	G2	G2	G2	G2	G2
211	H									
212	H	H								
213	H	H	H							
214	H	H	H	H						
215	H	H	H	H	H					
216	H	H	H	H	H	H				
217	H	H	H	H	H	H	H			
218	H	H	H	H	H	H	H	H		
219	H	H	H	H	H	H	H	H	H	
220	H	H	H	H	H	H	H	H	H	H
221	H1									
222	H1	H1								
223	H1	H1	H1							
224	H1	H1	H1	H1						
225	H1	H1	H1	H1	H1					
226	H1	H1	H1	H1	H1	H1				
227	H1	H1	H1	H1	H1	H1	H1			
228	H1	H1	H1	H1	H1	H1	H1	H1		
229	H1	H1	H1	H1	H1	H1	H1	H1	H1	
230	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1
231	H2									
232	H2	H2								
233	H2	H2	H2							
234	H2	H2	H2	H2						
235	H2	H2	H2	H2	H2					
236	H2	H2	H2	H2	H2	H2				
237	H2	H2	H2	H2	H2	H2	H2			
238	H2	H2	H2	H2	H2	H2	H2	H2		
239	H2	H2	H2	H2	H2	H2	H2	H2	H2	
240	H2	H2	H2	H2	H2	H2	H2	H2	H2	H2
241	J									
242	J	J								
243	J	J	J							
244	J	J	J	J						
245	J	J	J	J	J					
246	J	J	J	J	J	J				
247	J	J	J	J	J	J	J			
248	J	J	J	J	J	J	J	J		
249	J	J	J	J	J	J	J	J	J	
250	J	J	J	J	J	J	J	J	J	J

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
251	J1									
252	J1	J1								
253	J1	J1	J1							
254	J1	J1	J1	J1						
255	J1	J1	J1	J1	J1					
256	J1	J1	J1	J1	J1	J1				
257	J1	J1	J1	J1	J1	J1	J1			
258	J1	J1	J1	J1	J1	J1	J1	J1		
259	J1	J1	J1	J1	J1	J1	J1	J1	J1	
260	J1	J1	J1	J1	J1	J1	J1	J1	J1	J1
261	J2									
262	J2	J2								
263	J2	J2	J2							
264	J2	J2	J2	J2						
265	J2	J2	J2	J2	J2					
266	J2	J2	J2	J2	J2	J2				
267	J2	J2	J2	J2	J2	J2	J2			
268	J2	J2	J2	J2	J2	J2	J2	J2		
269	J2	J2	J2	J2	J2	J2	J2	J2	J2	
270	J2	J2	J2	J2	J2	J2	J2	J2	J2	J2
271	A3									
272	A3	A3								
273	A3	A3	A3							
274	A3	A3	A3	A3						
275	A3	A3	A3	A3	A3					
276	A3	A3	A3	A3	A3	A3				
277	A3	A3	A3	A3	A3	A3	A3			
278	A3	A3	A3	A3	A3	A3	A3	A3		
279	A3	A3	A3	A3	A3	A3	A3	A3	A3	
280	A3	A3	A3	A3	A3	A3	A3	A3	A3	A3
281	A4									
282	A4	A4								
283	A4	A4	A4							
284	A4	A4	A4	A4						
285	A4	A4	A4	A4	A4					
286	A4	A4	A4	A4	A4	A4				
287	A4	A4	A4	A4	A4	A4	A4			
288	A4	A4	A4	A4	A4	A4	A4	A4		
289	A4	A4	A4	A4	A4	A4	A4	A4	A4	
290	A4	A4	A4	A4	A4	A4	A4	A4	A4	A4
291	A5									
292	A5	A5								
293	A5	A5	A5							
294	A5	A5	A5	A5						
295	A5	A5	A5	A5	A5					
296	A5	A5	A5	A5	A5	A5				
297	A5	A5	A5	A5	A5	A5	A5			
298	A5	A5	A5	A5	A5	A5	A5	A5		
299	A5	A5	A5	A5	A5	A5	A5	A5	A5	
300	A5	A5	A5	A5	A5	A5	A5	A5	A5	A5

Source: https://assist.dla.mil - Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
301	B3									
302	B3	B3								
303	B3	B3	B3							
304	B3	B3	B3	B3						
305	B3	B3	B3	B3	B3					
306	B3	B3	B3	B3	B3	B3				
307	B3	B3	B3	B3	B3	B3	B3			
308	B3	B3	B3	B3	B3	B3	B3	B3		
309	B3	B3	B3	B3	B3	B3	B3	B3	B3	
310	B3	B3	B3	B3	B3	B3	B3	B3	B3	B3
311	B4									
312	B4	B4								
313	B4	B4	B4							
314	B4	B4	B4	B4						
315	B4	B4	B4	B4	B4					
316	B4	B4	B4	B4	B4	B4				
317	B4	B4	B4	B4	B4	B4	B4			
318	B4	B4	B4	B4	B4	B4	B4	B4		
319	B4	B4	B4	B4	B4	B4	B4	B4	B4	
320	B4	B4	B4	B4	B4	B4	B4	B4	B4	B4
321	B5									
322	B5	B5								
323	B5	B5	B5							
324	B5	B5	B5	B5						
325	B5	B5	B5	B5	B5					
326	B5	B5	B5	B5	B5	B5				
327	B5	B5	B5	B5	B5	B5	B5			
328	B5	B5	B5	B5	B5	B5	B5	B5		
329	B5	B5	B5	B5	B5	B5	B5	B5	B5	
330	B5	B5	B5	B5	B5	B5	B5	B5	B5	B5
331	C3									
332	C3	C3								
333	C3	C3	C3							
334	C3	C3	C3	C3						
335	C3	C3	C3	C3	C3					
336	C3	C3	C3	C3	C3	C3				
337	C3	C3	C3	C3	C3	C3	C3			
338	C3	C3	C3	C3	C3	C3	C3	C3		
339	C3	C3	C3	C3	C3	C3	C3	C3	C3	
340	C3	C3	C3	C3	C3	C3	C3	C3	C3	C3
341	C4									
342	C4	C4								
343	C4	C4	C4							
344	C4	C4	C4	C4						
345	C4	C4	C4	C4	C4					
346	C4	C4	C4	C4	C4	C4				
347	C4	C4	C4	C4	C4	C4	C4			
348	C4	C4	C4	C4	C4	C4	C4	C4		
349	C4	C4	C4	C4	C4	C4	C4	C4	C4	
350	C4	C4	C4	C4	C4	C4	C4	C4	C4	C4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
351	C5									
352	C5	C5								
353	C5	C5	C5							
354	C5	C5	C5	C5						
355	C5	C5	C5	C5	C5					
356	C5	C5	C5	C5	C5	C5				
357	C5	C5	C5	C5	C5	C5	C5			
358	C5	C5	C5	C5	C5	C5	C5	C5		
359	C5	C5	C5	C5	C5	C5	C5	C5	C5	
360	C5	C5	C5	C5	C5	C5	C5	C5	C5	C5
361	D3									
362	D3	D3								
363	D3	D3	D3							
364	D3	D3	D3	D3						
365	D3	D3	D3	D3	D3					
366	D3	D3	D3	D3	D3	D3				
367	D3	D3	D3	D3	D3	D3	D3			
368	D3	D3	D3	D3	D3	D3	D3	D3		
369	D3	D3	D3	D3	D3	D3	D3	D3	D3	
370	D3	D3	D3	D3	D3	D3	D3	D3	D3	D3
371	D4									
372	D4	D4								
373	D4	D4	D4							
374	D4	D4	D4	D4						
375	D4	D4	D4	D4	D4					
376	D4	D4	D4	D4	D4	D4				
377	D4	D4	D4	D4	D4	D4	D4			
378	D4	D4	D4	D4	D4	D4	D4	D4		
379	D4	D4	D4	D4	D4	D4	D4	D4	D4	
380	D4	D4	D4	D4	D4	D4	D4	D4	D4	D4
381	D5									
382	D5	D5								
383	D5	D5	D5							
384	D5	D5	D5	D5						
385	D5	D5	D5	D5	D5					
386	D5	D5	D5	D5	D5	D5				
387	D5	D5	D5	D5	D5	D5	D5			
388	D5	D5	D5	D5	D5	D5	D5	D5		
389	D5	D5	D5	D5	D5	D5	D5	D5	D5	
390	D5	D5	D5	D5	D5	D5	D5	D5	D5	D5
391	E3									
392	E3	E3								
393	E3	E3	E3							
394	E3	E3	E3	E3						
395	E3	E3	E3	E3	E3					
396	E3	E3	E3	E3	E3	E3				
397	E3	E3	E3	E3	E3	E3	E3			
398	E3	E3	E3	E3	E3	E3	E3	E3		
399	E3	E3	E3	E3	E3	E3	E3	E3	E3	
400	E3	E3	E3	E3	E3	E3	E3	E3	E3	E3

Source: https://assist.dla.mil - Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
401	E4									
402	E4	E4								
403	E4	E4	E4							
404	E4	E4	E4	E4						
405	E4	E4	E4	E4	E4					
406	E4	E4	E4	E4	E4	E4				
407	E4	E4	E4	E4	E4	E4	E4			
408	E4	E4	E4	E4	E4	E4	E4	E4		
409	E4	E4	E4	E4	E4	E4	E4	E4	E4	
410	E4	E4	E4	E4	E4	E4	E4	E4	E4	E4
411	E5									
412	E5	E5								
413	E5	E5	E5							
414	E5	E5	E5	E5						
415	E5	E5	E5	E5	E5					
416	E5	E5	E5	E5	E5	E5				
417	E5	E5	E5	E5	E5	E5	E5			
418	E5	E5	E5	E5	E5	E5	E5	E5		
419	E5	E5	E5	E5	E5	E5	E5	E5	E5	
420	E5	E5	E5	E5	E5	E5	E5	E5	E5	E5
421	F3									
422	F3	F3								
423	F3	F3	F3							
424	F3	F3	F3	F3						
425	F3	F3	F3	F3	F3					
426	F3	F3	F3	F3	F3	F3				
427	F3	F3	F3	F3	F3	F3	F3			
428	F3	F3	F3	F3	F3	F3	F3	F3		
429	F3	F3	F3	F3	F3	F3	F3	F3	F3	
430	F3	F3	F3	F3	F3	F3	F3	F3	F3	F3
431	F4									
432	F4	F4								
433	F4	F4	F4							
434	F4	F4	F4	F4						
435	F4	F4	F4	F4	F4					
436	F4	F4	F4	F4	F4	F4				
437	F4	F4	F4	F4	F4	F4	F4			
438	F4	F4	F4	F4	F4	F4	F4	F4		
439	F4	F4	F4	F4	F4	F4	F4	F4	F4	
440	F4	F4	F4	F4	F4	F4	F4	F4	F4	F4
441	F5									
442	F5	F5								
443	F5	F5	F5							
444	F5	F5	F5	F5						
445	F5	F5	F5	F5	F5					
446	F5	F5	F5	F5	F5	F5				
447	F5	F5	F5	F5	F5	F5	F5			
448	F5	F5	F5	F5	F5	F5	F5	F5		
449	F5	F5	F5	F5	F5	F5	F5	F5	F5	
450	F5	F5	F5	F5	F5	F5	F5	F5	F5	F5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
451	G3									
452	G3	G3								
453	G3	G3	G3							
454	G3	G3	G3	G3						
455	G3	G3	G3	G3	G3					
456	G3	G3	G3	G3	G3	G3				
457	G3	G3	G3	G3	G3	G3	G3			
458	G3	G3	G3	G3	G3	G3	G3	G3		
459	G3	G3	G3	G3	G3	G3	G3	G3	G3	
460	G3	G3	G3	G3	G3	G3	G3	G3	G3	G3
461	G4									
462	G4	G4								
463	G4	G4	G4							
464	G4	G4	G4	G4						
465	G4	G4	G4	G4	G4					
466	G4	G4	G4	G4	G4	G4				
467	G4	G4	G4	G4	G4	G4	G4			
468	G4	G4	G4	G4	G4	G4	G4	G4		
469	G4	G4	G4	G4	G4	G4	G4	G4	G4	
470	G4	G4	G4	G4	G4	G4	G4	G4	G4	G4
471	G5									
472	G5	G5								
473	G5	G5	G5							
474	G5	G5	G5	G5						
475	G5	G5	G5	G5	G5					
476	G5	G5	G5	G5	G5	G5				
477	G5	G5	G5	G5	G5	G5	G5			
478	G5	G5	G5	G5	G5	G5	G5	G5		
479	G5	G5	G5	G5	G5	G5	G5	G5	G5	
480	G5	G5	G5	G5	G5	G5	G5	G5	G5	G5
481	H3									
482	H3	H3								
483	H3	H3	H3							
484	H3	H3	H3	H3						
485	H3	H3	H3	H3	H3					
486	H3	H3	H3	H3	H3	H3				
487	H3	H3	H3	H3	H3	H3	H3			
488	H3	H3	H3	H3	H3	H3	H3	H3		
489	H3	H3	H3	H3	H3	H3	H3	H3	H3	
490	H3	H3	H3	H3	H3	H3	H3	H3	H3	H3
491	H4									
492	H4	H4								
493	H4	H4	H4							
494	H4	H4	H4	H4						
495	H4	H4	H4	H4	H4					
496	H4	H4	H4	H4	H4	H4				
497	H4	H4	H4	H4	H4	H4	H4			
498	H4	H4	H4	H4	H4	H4	H4	H4		
499	H4	H4	H4	H4	H4	H4	H4	H4	H4	
500	H4	H4	H4	H4	H4	H4	H4	H4	H4	H4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Switch assembly - Continued.

Part number M22710/11-	Switch station module number									
	1	2	3	4	5	6	7	8	9	10
501	H5									
502	H5	H5								
503	H5	H5	H5							
504	H5	H5	H5	H5						
505	H5	H5	H5	H5	H5					
506	H5	H5	H5	H5	H5	H5				
507	H5	H5	H5	H5	H5	H5	H5			
508	H5	H5	H5	H5	H5	H5	H5	H5		
509	H5	H5	H5	H5	H5	H5	H5	H5	H5	
510	H5	H5	H5	H5	H5	H5	H5	H5	H5	H5
511	J3									
512	J3	J3								
513	J3	J3	J3							
514	J3	J3	J3	J3						
515	J3	J3	J3	J3	J3					
516	J3	J3	J3	J3	J3	J3				
517	J3	J3	J3	J3	J3	J3	J3			
518	J3	J3	J3	J3	J3	J3	J3	J3		
519	J3	J3	J3	J3	J3	J3	J3	J3	J3	
520	J3	J3	J3	J3	J3	J3	J3	J3	J3	J3
521	J4									
522	J4	J4								
523	J4	J4	J4							
524	J4	J4	J4	J4						
525	J4	J4	J4	J4	J4					
526	J4	J4	J4	J4	J4	J4				
527	J4	J4	J4	J4	J4	J4	J4			
528	J4	J4	J4	J4	J4	J4	J4	J4		
529	J4	J4	J4	J4	J4	J4	J4	J4	J4	
530	J4	J4	J4	J4	J4	J4	J4	J4	J4	J4
531	J5									
532	J5	J5								
533	J5	J5	J5							
534	J5	J5	J5	J5						
535	J5	J5	J5	J5	J5					
536	J5	J5	J5	J5	J5	J5				
537	J5	J5	J5	J5	J5	J5	J5			
538	J5	J5	J5	J5	J5	J5	J5	J5		
539	J5	J5	J5	J5	J5	J5	J5	J5	J5	
540	J5	J5	J5	J5	J5	J5	J5	J5	J5	J5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(E) Dimensions and configuration: See figures 1, 2, and 3.

Construction: B or D.

(E) Indexing: 36 or 45 degrees. See truth tables in figure 3.

Temperature-life characteristic: B. For lighted switches, maximum temperature is 71°C.

Vibration grade: 3 (15g, 10-2,000 Hz).

Shock type: M (100g) and H (high-impact). Methods I and II of MIL-S-22710 are applicable.

Altitude rating: 0 (under 10,000 feet).

(E) Terminal design: See figure 3.

Connector compatibility: MIL-C-21097.

(E) EMI/RFI shielding: Applicable, where specified.

Moisture resistance: Method II of MIL-S-22710.

Luminance: For illuminated switches only (see table III).

(E) TABLE III. Photometric brightness.

Lamp	Lamp color	Brightness	Rating	
			Volts	Amperes
MS25237-328	Clear	2.0 ±1.0 foot-lamberts	5	0.18
MS25237-387	Clear	2.0 ±1.0 foot-lamberts	28	0.04
MS25237-328R	Red	0.2 to 1.0 foot-lamberts	5	0.18
MS25237-387R	Red	0.2 to 1.0 foot-lamberts	28	0.04

Operating force (tangential): 4 ounces minimum, 22 ounces maximum.

Explosion: Applicable.

Life (rotational): Method 206, test condition G, MIL-STD-202 (see table IV).

TABLE IV. Electrical test load.

Test or condition	Resistive	
At atmospheric pressure	0.125 Ampere	28 V dc
Life (low level)	10 mA	30 mV

(E) Military part number: See tables I and II.

CAUTION: Isopropyl alcohol recommended for cleaning and solder-flux removal. Avoid the use of acids, ammonia, chlorinated or aromatic hydrocarbons, and oxygenated solvents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, SM
Navy - AS
Air Force - 17
DLA - ES

User activities:
Army - ME
Navy - MC, OS
Air Force - 11

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-1178)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE· This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S 2270/11E

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
ELEX 8111
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20363

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:30Z
Check the source to verify that this is the current version before use.