


Form Approved
OMB No. 0704-0188

METRIC

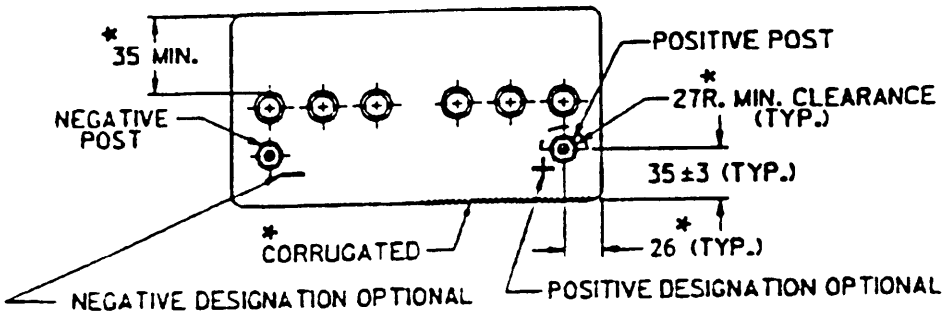

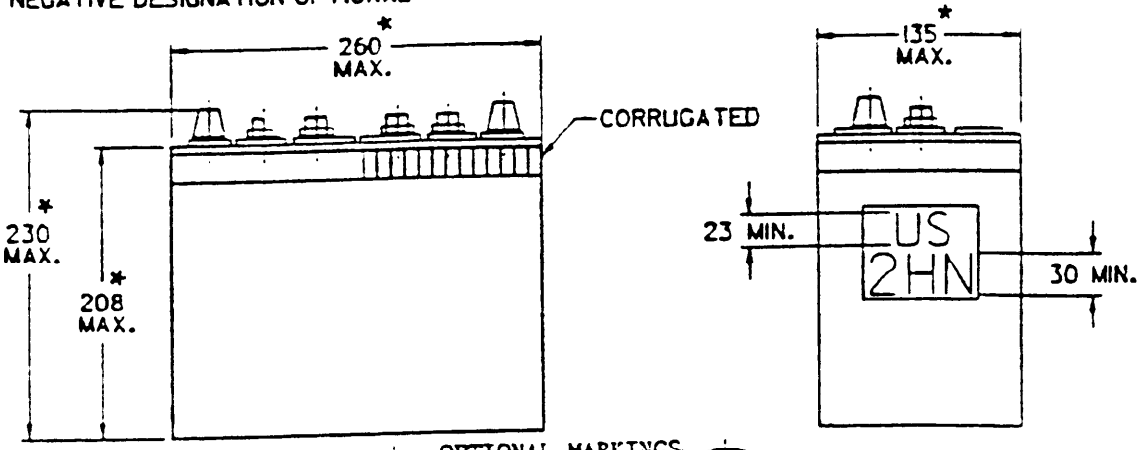

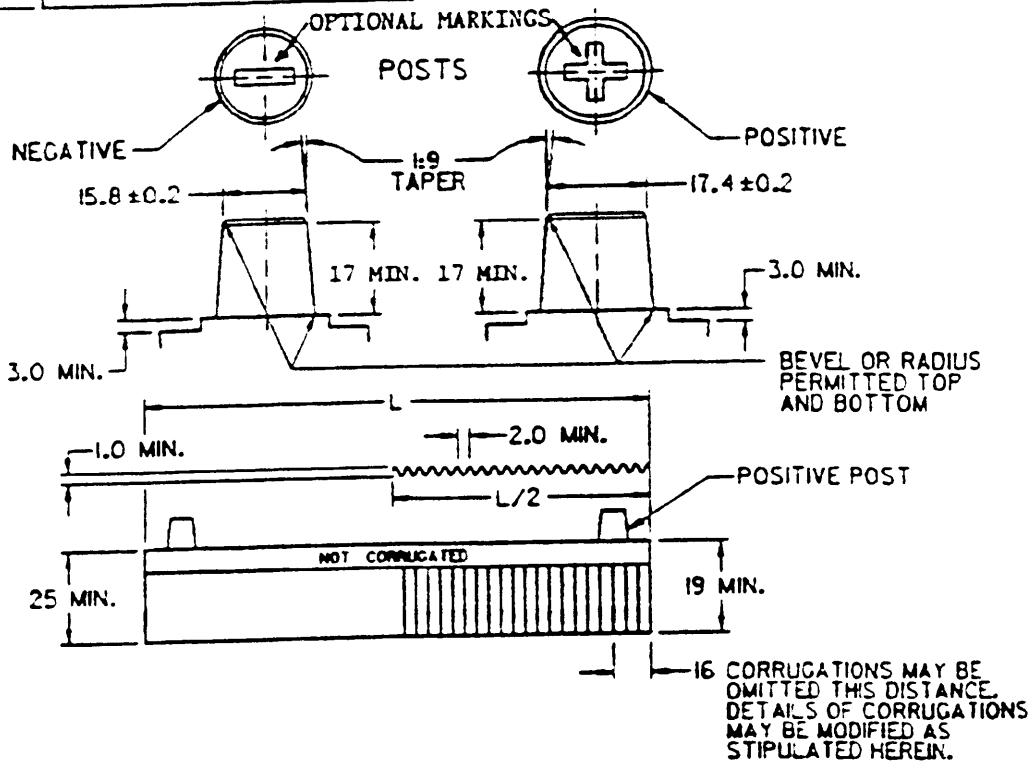

CONDITION	PIN	PREVIOUS
CHARGED AND DRY	M11188/1-A-12V	MS35000
CHARGED AND WET	M11188/1-B-12V	MS35000

1. requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-11188

This specification is approved for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY-AT NAVY-YD
AIR FORCE-99 DLA-

REVIEW:

USER:

PROJECT NUMBER: 6140-0757

MILITARY SPECIFICATION SHEET

TITLE: BATTERY, STORAGE, LEAD - ACID, WATERPROOF 12 VOLT (2HN)

International Agreement(S):
STANAG 4015, QSTAG 347

SPECIFICATION SHEET NUMBER:
MIL-B-11188/1A
13 September 1994

SUPERSEDING: MIL-B-11188/1
3 January 1991

AMSC-NA FSC-6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:31?
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-11188

This specification is approved for use by all Departments and Agencies of the Department of Defense.

TYPE 2HN BATTERY	
PHYSICAL AND ELECTRICAL REQUIREMENTS	
NOMINAL WEIGHT UNFILLED	13 KG
NOMINAL WEIGHT FILLED	17 KG
NOMINAL VOLTAGE	12 VOLTS
FINAL VOLTAGE AT 20 HOUR RATE	10.5 VOLTS
RATED CAPACITY AT 20 HOUR RATE	45 AMP HOURS
DISCHARGE AT 20 HOUR RATE	2.25 AMPS
CHARGING RATE	2.5 AMPS
QUALITY CONFORMANCE INSPECTION REQUIREMENTS	
TEST	MINIMUM VALUES
FILLED DISCHARGE AT 80°F TIME TO DROP TO 1 VOLT PER CELL	AT 150 AMPS 5 MINUTES
FULL CHARGE CAPACITY AT 80°F	45 AMP-HOURS
HIGH DISCHARGE RATE AT MINUS 40°F TIME TO DROP TO 1 VOLT PER CELL	AT 150 AMPS 1.25 MINUTES
LIFE CYCLE CAPACITY TEST 1	188 CYCLES
OVERCHARGE CYCLE TEST	9 CYCLES
RETENTION OF CHARGE	36 AMP-HOURS
RESERVE CAPACITY	75 MINUTES

NOTES:

1. ELECTROLYTE SHALL NOT BE FURNISHED FOR CHARGED AND DRY BATTERIES.
2. CHARGED AND WET BATTERIES SHALL BE FILLED WITH ELECTROLYTE AND READY TO USE.
3. DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 2.0.
4. COVER AND BASE TO BE PARALLEL WITHIN 1.2 MILLIMETERS TOTAL.
5. SIX (6) SUBMERSIBLE VENT PLUGS SHALL BE LOCATED ONLY IN RESPECT TO REQUIRED MINIMUM DISTANCE FROM TERMINAL POSTS AND SIDES OF BATTERY.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
7. POLARITY OF POSITIVE AND NEGATIVE POSTS SHALL BE ADEQUATELY MARKED FOR VISUAL IDENTIFICATION. STYLE OF MARKING IS OPTIONAL.

"CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS QSTAG 347 AND STANAG 4015. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES. IF REQUIRED."

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY-AT NAVY-YD AIR FORCE-99 DLA- REVIEW: USER: PROJECT NUMBER: 6140-0757	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD - ACID, WATERPROOF 12 VOLT (2HN) International Agreement(S): STANAG 4015, QSTAG 347	SPECIFICATION SHEET NUMBER: MIL-B-11188/1A 13 September 1994 SUPERSEDING: MIL-B-11188/1 3 January 1991 AMSC-NA FSC-6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:31Z
Check the source to verify that this is the current version before use.