
The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-11188

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

INCH-POUND

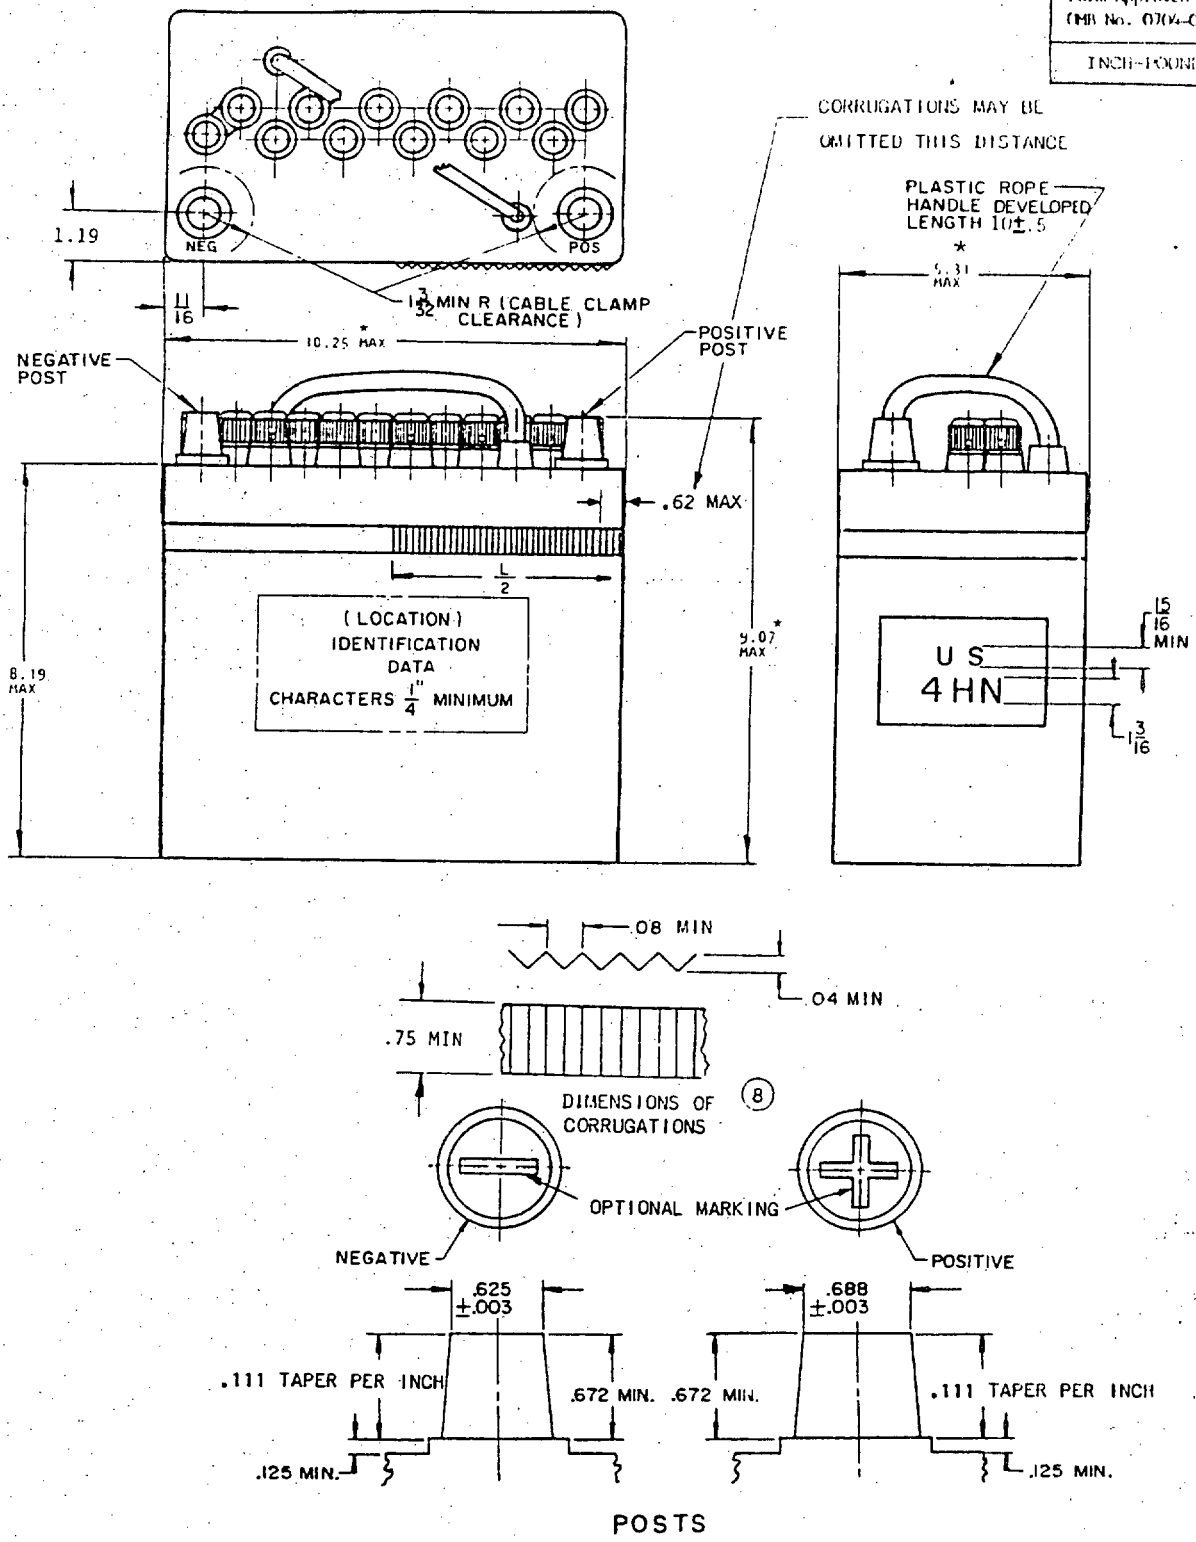

POSTS

PREPARING ACTIVITY: ARMY - AT CUSTODIANS: ARMY-AT REVIEW: USER: PROJECT NUMBER: 6140-A736	MILITARY SPECIFICATION SHEET TITLE: BATTERY, STORAGE, LEAD-ACID, WATERPROOF 24 VOLT (4HN) International Agreement(S): STANAG 4015, QSTAG 347	SPECIFICATION SHEET NUMBER: MIL-B-11188/2 3 JANUARY 1991 SUPERSEDING: MS75047E(AT) 17 JANUARY 1984 AMSC N/A | FSC-6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:31Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-B-11188

TYPE 4HN BATTERY	
PHYSICAL AND ELECTRICAL REQUIREMENTS	
NOMINAL WEIGHT UNFILLED	29 POUNDS
NOMINAL WEIGHT FILLED	38 POUNDS
NOMINAL VOLTAGE	24 VOLTS
FINAL VOLTAGE AT 20 HOUR RATE	21 VOLTS
RATED CAPACITY AT 20 HOUR RATE	21 AMP HOURS
DISCHARGE AT 20 HOUR RATE	1.05 AMPS
CHARGING RATE	1.05 AMPS

QUALITY CONFORMANCE INSPECTION REQUIREMENTS	
TEST	MINIMUM VALUES
FILLED DISCHARGE AT 80°F TIME TO DROP TO 1 VOLT PER CELL	75 AMPS 5.5 MINUTES
FULL CHARGE CAPACITY AT 80°F	21 AMP-HOURS
HIGH DISCHARGE RATE AT MINUS 40°F TIME TO DROP TO 1 VOLT PER CELL	75 AMPS 1.75 MINUTES
LIFE CYCLE CAPACITY TEST 1	196 CYCLES
OVERCHARGE CYCLE TEST	8 CYCLES
RETENTION OF CHARGE	16.8 AMP-HOURS
RESERVE CAPACITY	28 MINUTES

NOTES:

1. FOR CHARGED AND DRY BATTERIES ELECTROLYTE NOT FURNISHED.
2. FOR CHARGED AND WET BATTERIES TO BE FILLED WITH ELECTROLYTE. CHARGED AND READY TO USE.
3. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .06.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN BY DIMENSIONS, NOTATIONS ARE REFERENCED DOCUMENTS.
5. POLARITY OF POSITIVE AND NEGATIVE POSTS SHALL BE ADEQUATELY MARKED FOR VISUAL IDENTIFICATION. STYLE OF MARKING IS OPTIONAL.
6. CORRUGATIONS MAY BE LOCATED ON CONTAINER OR COVER.

"CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS QSTAG 347 AND STANAG 4015. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED."

CONDITION	PIN	PREVIOUS P/N
CHARGED AND DRY	M11188/2-A-24V	MS75047-1
CHARGED AND WET	M11188/2-B-24V	MS75047-2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY-AT

REVIEW:

USER:

PROJECT NUMBER: 6140-A736

MILITARY SPECIFICATION SHEET

TITLE: BATTERY, STORAGE, LEAD-ACID, WATERPROOF 24 VOLT (4HN)

International Agreement(s): STANAG 4015, QSTAG 347

SPECIFICATION SHEET NUMBER: MIL-B-11188/2

3 JANUARY 1991

SUPERSEDING: MS75047E(AT) 17 JANUARY 1984

AMSC A/N

FSC- 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:31Z
Check the source to verify that this is the current version before use.