MIL-C-11218D
28 May 1974
SUPERSEDING
MIL-C-11218C
22 September 1965

MILITARY SPECIFICATION

CONVEYORS, ROLLER AND WHEEL, GRAVITY AND CONVEYOR SUPPORTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers gravity conveyors and adjustable supports for general use in loading, unloading, and handling materials.

1.2 Classification. Conveyor sections shall be of the following types, classes, styles and sizes as specified (see 6.2 and 6.3):

Type I - Roller

Class A - Steel, 1000 pound capacity

Style 1 - Straight section

Size 1 - 10 inches between side rails
Size 2 - 12 inches between side rails
Size 3 - 16 inches between side rails
Size 4 - 18 inches between side rails
Size 5 - 25 inches between side rails
Size 6 - 37 inches between side rails

Style 2 - 45 degree curved section

Size 2 - 12 inches between side rails
Size 3 - 16 inches between side rails
Size 4 - 18 inches between side rails

Style 3 - 90 degree curved section

Size 5 - 25 inches between side rails

Class B - Aluminum, 500 pound capacity

Style 1 - Straight section

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

Size 1 - 10 inches between side rails
Size 3 - 16 inches between side rails

Style 2 - 45 degree curved section

Size 3 - 16 inches between side rails

Type II - Wheel

Class A - Steel, 800 pound capacity

Style 1 - Straight section

Size 1 - 10 inches between side rails
Size 3 - 16 inches between side rails
Size 4 - 18 inches between side rails

Style 2 - 45 degree curved section

Size 1 - 10 inches between side rails
Size 3 - 16 inches between side rails
Size 4 - 18 inches between side rails

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

QQ-P-416	- Plating, Cadmium (Electrodeposited).
QQ-S-775	- Steel Sheets, Carbon, Zinc-Coated.
QQ-Z-325	- Zinc Coating, Electrodeposited, Requirements for.
PPP-C-650	- Crates, Wood, Open and Covered.

Military

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-G-81322	- Grease, Aircraft, General Purpose, Wide Temperature Range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-100	- Engineering Drawing Practices.
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MS35338	- Washer, Lock-Spring, Helical, Regular (Medium) Series (IN/MM).
MS51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (IN/MM).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The conveyors shall consist of straight sections, 45-degree and 90-degree sections, and the supports used to support the conveyors. The conveyors shall be the gravity feed type. Capacities shall conform to the applicable class specified.

3.2 First article (preproduction model). The supplier shall furnish one or more conveyors as specified (see 6.2), for examination and testing within the time frame specified (see 6.2), to prove prior to starting production, that his production methods and choice of design detail will produce conveyors that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and unless otherwise specified herein, all examinations and tests shall be conducted by the supplier subject to surveillance and approval by the Government (see 6.4). When specified (see 6.2), the Government will conduct any or all of the preproduction examination and tests as specified (see 6.2).

3.2.1 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3.1 Plating. Cadmium plating shall conform to QQ-P-416, Type II, Class 1. Zinc coating shall be in accordance with QQ-Z-325, Type II, Class 1 or QQ-S-775, Class d. Threaded parts shall be plated in accordance with QQ-P-416, Type II, Class 3.

3.4 Construction. The conveyor sections and conveyor supports shall be constructed in accordance with the suppliers standard commercial practice, except as specified herein. There shall be no evidence of failure or permanent deformation or deflection in excess of 0.25 inches measured at the center of the load, when conveyor sections are tested as specified in 4.5.2.1. Conveyor rollers and wheels shall revolve freely and there shall be no evidence of bearings, roller or wheel damage, or internal bearing friction preventing items from moving freely along the conveyor when tested as specified in 4.5.2.2.

3.5 Sections. Each section shall consist of formed, rolled, or extruded side rails, crossmembers and axles with rollers or wheels. Each section shall be equipped with a hook and rod coupler (see Figure 1 and 6.5), so that any number of sections may be coupled together to form a continuous conveyor. The coupler supplied shall be capable of mating with that depicted by Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.5.1 Style 1, straight section. Each straight section shall be 10 feet ±0.0625 inch long (not including the hook coupler). Straight sections shall be provided with 39 axles spaced 3 inches apart, the first and last axles 1-1/2 inches from either end.

3.5.2 Curved sections. Curved sections shall have a nominal radius of 36 inches to the inside rail.

3.5.2.1 Style 2, 45 degree curved section. The 45 degree curved section shall have 12 axles equally and symmetrically spaced.

3.5.2.2 Style 3, 90 degree curved section. The 90 degree curved section shall have 24 axles equally and symmetrically spaced.

3.5.2.3 Axle holes. Axle holes shall be positioned so that the top of the roller or wheel extends not less than 0.3125 nor more than 0.375 inch above the side rails.

3.6 Guard rails. Unless otherwise specified (see 6.2), guard rails shall be provided for each curved section of the conveyors. Guard rails shall have the same radius as the outer side rail and each end shall be flared outward. Guard rails shall extend not less than 3.5 inches above the carrying surface of the rollers or wheels. Guard rails shall be removable and adjustable to a point against the outer side rail to a point at least 6 inches beyond the outer side rail. Guard rails and their brackets shall be of the same material as the conveyor side rail. Both ends of the guard rail shall be flared outward not less than 2 inches beyond the extended radius.

3.7 Crossmembers. Crossmembers shall be provided to aline and brace the side rails and to accommodate the support arms. Crossmembers shall be formed, rolled, or extruded metal and shall be securely fastened to the side rails by welding or with through bolts and self-locking nuts. Straight sections shall have not less than four crossmembers. The 45 degree sections shall have not less than three crossmembers and the 90 degree sections shall have not less than four crossmembers. Crossmembers shall be placed as near each end of the section as practicable and the remaining members shall be equally spaced between the end members. Crossmembers shall be of the same material as the side rails.

3.8 Conveyor supports. When specified (see 6.2), portable, collapsible supports shall be provided to support the sections of Size 1, Size 2, Size 3, and Size 4 conveyors. Supports shall have a minimum vertical adjustment range of 30 to 50 inches above the floor. A method of locking the support in any position shall be provided. The design static load capacity of each support shall be not less than 400 pounds with an overload of 300 percent. The number of supports required shall be as specified (see 6.2). The conveyor supports shall be provided with slots to engage the crossmembers on each section. The size of the engaging portion shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

For size 1 - 9-1/2 inch arm length
For size 2 - 11-1/2 inch arm length
For size 3 - 15-1/2 inch arm length
For size 4 - 17-1/2 inch arm length

3.9 Type I, roller conveyor. Each roller conveyor shall consist of two identical side rails with axle mounted rollers between the side rails.

3.9.1 Rollers. Rollers shall be between 1.875 and 2.125 inches in diameter. The ends of each roller shall be fitted with ball or roller bearings. Bearings shall be press fitted into the end of each roller, and shall be permanently lubricated with grease conforming to MIL-G-81322. Seals shall be provided for each bearing to retain the grease and to prevent water and dust from entering. Axles shall be of steel rod and shall be cadmium or zinc plated. Axles shall not turn with the rollers.

3.9.2 Class A, steel. Class A conveyors shall have steel side rails and rollers. The design capacity of Class A conveyors shall be 1000 pounds with an overload factor of 200 percent for each section, with a minimum capacity of 150 pounds for each roller. The minimum length of each roller for the various sizes shall be as follows:

Size 1 - 9 inches
Size 2 - 11 inches
Size 3 - 15 inches
Size 4 - 17 inches
Size 5 - 24 inches
Size 6 - 36 inches

3.9.3 Class B, aluminum. Class B conveyors shall have aluminum side rails and axle mounted rollers. The design capacity of Class B conveyors shall be 500 pounds, with a safety factor of 200 percent for each section, with a minimum capacity of 80 pounds for each roller. The minimum length of each roller for the various sizes shall be as follows:

Size 1 - 9 inches
Size 3 - 15 inches

3.10 Type II, steel conveyors. Type II conveyors shall be of steel and shall consist of side rails, wheels, and longitudinal strengthening bars. The capacity of Type II conveyors shall be 800 pounds, with a safety factor of 200 percent for each section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.10.1 Wheels. The wheels shall be of steel and shall be between 1.875 and 2.125 inches in diameter. Each wheel shall have a minimum load capacity of 25 pounds. Each wheel shall be fitted with a ball or roller bearing. Bearings shall be press fitted in the wheels, and shall be permanently lubricated with grease conforming to MIL-G-81322. Seals shall be provided for each bearing to retain the grease and to prevent water and dust from entering. Axles shall be round steel rod and shall be retained in side rails with retainer rings, cotter pins, or self-locking nuts. Axles shall not turn with the wheels. The axles and the wheels shall be cadmium or zinc plated. Wheels shall be equally spaced on the axles and shall be staggered on alternate axles. Spacers shall be provided to maintain the spacing between wheels on each axle. The number of wheels for each axle for the various size conveyors shall be as follows:

Size 1 - 3 wheels
Size 3 - 4 wheels
Size 4 - 4 wheels

3.10.2 Longitudinal strengthening bars. Not less than two steel longitudinal strengthening bars for Size 1 conveyors and not less than three for Sizes 3 and 4 conveyors shall be provided, and shall be equally spaced between the side rails. Strengthening bars shall be not less than 1 inch in width and shall be of sufficient length to engage all the axles.

3.11 Treatment and painting. Components of the conveyor which are of steel and are not cadmium or zinc plated shall be treated and painted in accordance with MIL-T-704, Type A. Unless otherwise specified (see 6.2), color of the final coat shall be the color normally used by the supplier.

3.12 Marking for identification. Each section of the conveyor, and the supports (when provided), shall be marked in accordance with MIL-STD-130. The marking shall be applied to the conveyor on plates conforming to MIL-P-514, Type I, Style 1, Composition C of Type I, Grade A, Class 1 material. Plates shall be attached by screws, bolts, or rivets in a location where the plates shall be both visible and legible.

3.13 Workmanship. The quality of workmanship shall be such as to produce conveyors that are in accordance with the requirements of this specification and insure proper functioning of all parts of the conveyor. Metal surfaces shall be free from burrs, slivers, or sharp edges which may prove injurious to operating personnel or cause damage to conveyed loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.13.1 Welding. The mating surfaces of any parts to be welded shall be free from scale, paint, grease, oxide film and other foreign matter. The welding shall be done by any method compatible with the filler and parent metals. Welds may be ground, filed, buffed or chipped, but not hammered. Welded joints shall be free from defects such as parent metal cracks, cracks in weld metal, lack of fusion, lack of penetration, lack of prescribed fit, slag inclusion, or spatter.

3.13.2 Bolted connections. Boltholes shall be accurately formed and shall be free from burrs. All fasteners shall be correctly torqued and shall have full thread engagement. Threaded body of fasteners shall not protrude outward more than two full threads.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction conveyor shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction conveyor shall be tested as specified in 4.5.2.1 through 4.5.2.3. When conveyor supports are supplied they shall be tested as specified in 4.5.2.4. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, Inspection Level II.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. Acceptable Quality Level (AQL) shall be 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1 through 4.5.2.3. When conveyor supports are supplied they shall be tested in accordance with 4.5.2.4. AQL for conveyors and conveyor supports shall be 4.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The conveyors shall be examined as specified herein for the following defects:

Major

101. Material not as specified.
102. Plating not as specified.
103. Dimensions not as specified.
104. Curved sections not as specified.
105. Axle holes not as specified.
106. Guard rails not as specified.
107. Crossmembers not as specified.
108. Supports not as specified.
109. Rollers not as specified.
110. Wheels not as specified.
111. Longitudinal strengthening bars not as specified, (Type II only).
112. Workmanship not as specified.

Minor

201. Marking not as specified.
202. Treatment and painting not as specified.

4.5.2 Tests.

4.5.2.1 Load. One complete conveyor section supported at both ends by conveyor supports or in a similar manner shall be loaded with an equally distributed load twice the design capacity of the section. Curved sections shall be supported at each end and at one point near the center of the arc. The load shall remain on the conveyor for not less than 15 minutes. A deflection of more than 0.25 inch, or any damage or permanent deformation shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

4.5.2.2 Roll. Two sections shall be coupled together and supported in an inclined position of 8 inches per section. A load equal to the rated load of three rollers or the wheels on three axles (as applicable), shall be placed in a wooden box 10 inches wide by the width of the conveyor. The box with its load shall be placed in the high end of the conveyor and released. No force shall be applied to start the box moving. Inability of the two sections to connect properly or inability of the conveyor to allow the box to move freely down the conveyor to the low end shall constitute failure of this test.

4.5.2.3 Endurance. The test specified in 4.5.2.2 shall be repeated 1000 times. Replacement of components shall not be permitted during this test. Any evidence of damage to, or deformation of any component of the conveyor or ability of the conveyor to allow the box to move freely, shall constitute failure of this test.

4.5.2.4 Conveyor support. The conveyor support shall be extended to its maximum height and a static load of 1200 pounds placed on the support arm. The load shall remain on the support arm for not less than 15 minutes. Any evidence of permanent deformation, fracture, or slipping of the height adjustment shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Preproduction pack inspection.

4.6.1.1 Examination. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

113.	Minimum cube utilization not realized through dissassembly of guard rails from curved sections when necessary.	
114.	Containers not as specified for Level A. Each incorrect container shall constitute one defect.	
115.	Conveyor sections of unlike description packed together for Level A.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

116. Crate for curved sections not constructed in a rectangular manner for Level A.
117. Blocking, bracing, and anchoring not as specified for Level A.
118. Strapping not as specified for Level A.
119. Marking missing, illegible, incorrect or incomplete for Level A or C.

5. PREPARATION FOR DELIVERY

5.1 Preproduction pack. The supplier shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packing, that the packing and marking comply with the preparation for delivery requirements of this specification. Examination shall be those specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.6). The preproduction pack may be accomplished utilizing either the preproduction model conveyor or a production conveyor. If the preproduction model conveyor is utilized, any packing shall be removed by the supplier at no expense to the Government when requested by the Government to facilitate comparison between the preproduction model conveyor and production conveyors.

5.2 Packing. Packing shall be Level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Dissassembly. When necessary to effect minmum cube utilization, the guard rails shall be dissassembled from the curved conveyor sections. The mounting fasteners shall be reinstalled in one of the mating parts and secured to prevent their loss.

5.2.1.2 Conveyor sections. Two conveyor sections of like description, including the guard rail assembly for the curved sections, shall be packed together in a close-fitting open wood crate conforming to PPP-C-650, Type II, Style B. The crate for the curved sections shall be constructed in a rectangular manner to provide mimimum cube. The contents shall be blocked, braced, and anchored within the crate in a manner to prevent free movement and damage in accordance with the appendix to the crate specification. All required strapping shall be Finish A, unless otherwise specified (see 6.2).

5.2.1.3 Supports. Supports, when procured, shall be packed together in a close-fitting open wood crate conforming to PPP-C-650, Type II, Style B. The contents shall be blocked, braced, and anchored within the crate in a manner to prevent free movement and damage in accordance with the appendix to the crate specification. The supports shall be shipped separate from but at the same time as the conveyors. All required strapping shall be Finish A, unless otherwise specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

5.2.2 Level C. The conveyor sections, guard-rail assemblies, and supports when procured, shall be prepared for shipment in a manner to assure carrier acceptance and safe delivery to destination at lowest ratings as loose, bundled, or boxed items in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, bundles or shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The conveyors covered by this specification are intended for use with or without supports to convey materials to or from freight cars, trucks, trailers or other commercial or military carriers. Other uses include material handling within warehouses and field storage areas.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type, class, style and size of conveyor required (see 1.2).
(c) Time frame required for the submission of preproduction model and number of models required (see 3.2).
(d) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and test will be conducted by the Government and which examination and tests shall be conducted by the supplier (see 3.2).
(e) When guard rail assemblies are not required (see 3.6).
(f) When supports are required and number of supports required (see 3.8).
(g) Color required if other than that normally supplied (see 3.11).
(h) Time frame required for submission of preproduction pack (see 5.1).
(i) Level of packing required (see 5.2).
(j) When strapping other than Finish A is required (see 5.2.1.2 and 5.2.1.3).

6.3 Classification changes. Changes in classification between MIL-C-11218C and this revision of the specification are as follows:

(a) Capacities have been deleted as a separate classification and added to each class of conveyor with no actual change in load carrying capacity.
(b) The "10 foot" dimension has been deleted from Style 1 designation under all classes and included in 3.5.1 with no change in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

6.4 Preproduction model. Any changes or deviations of production conveyors from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish conveyors conforming to this specification.

6.5 Information figure. Figure 1 shows a hook and rod coupling which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishing of other couplings which conform to this specification (see 3.5).

6.6 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the conveyors in accordance with this specification.

6.7 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and supplier's maintenance and operation manual to be furnished with each conveyor.

6.8 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of conveyors.

Custodians:

Army - ME
Navy - SA
Air Force 84

Review activities:

Army - CE
DSA - CS

User activities:


Army - SM
Navy - MC

Preparing activity:

Army - ME

Project No. 3910-0053

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

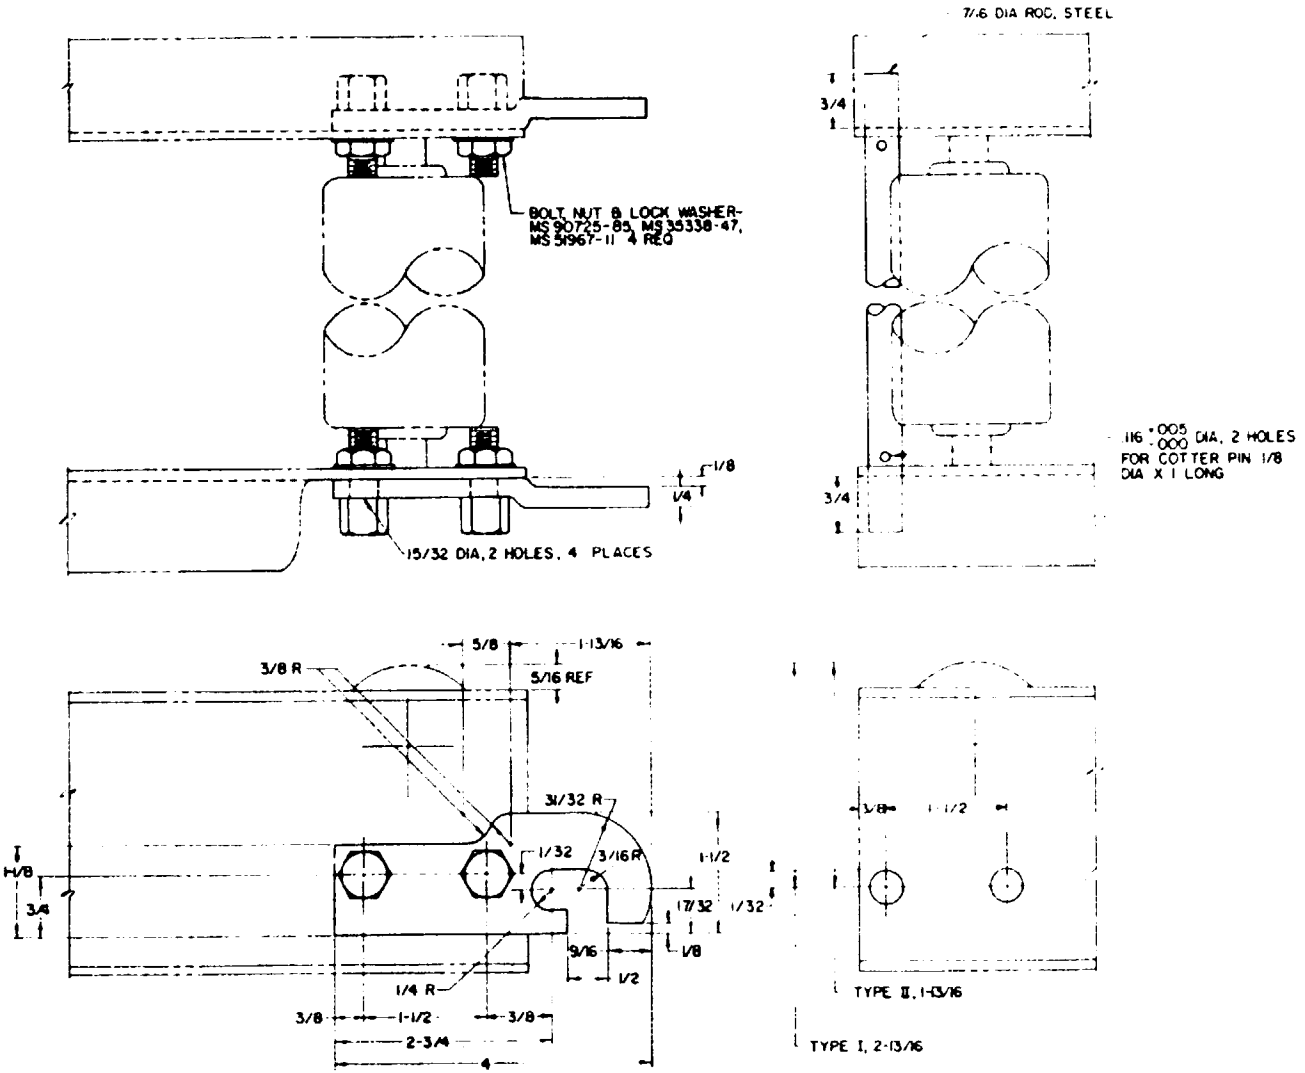

NOTE:
DIMENSIONS ARE IN INCHES.

FIGURE 1 HOOK AND ROD COUPLER

X2351A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
ATTN: STSFB-DS
Fort Belvoir, Va 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-C-11218D - CONVEYORS, ROLLER AND WHEEL, GRAVITY AND CONVEYOR SUPPORTS

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   YES NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1 JAN 73 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.