MILITARY SPECIFICATION

CONVEYORS, ROLLER AND WHEEL, GRAVITY AND CONVEYOR SUPPORTS

This amendment forms a part of Military Specification MIL-C-11218D, dated 28 May, 1974, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1, under SPECIFICATIONS, MILITARY delete:

"MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel."

PAGE 5

3.5.1, line 3, delete "39" and substitute "40".

PAGE 6

3.9.2, line 2, after "Rollers.", insert the following sentence:

"Rollers shall be cadmium or zinc plated in accordance with 3.3.1."

3.9.3, line 2, delete "axle mounted rollers" and substitute "rollers except the two end rollers for each section shall be steel in accordance with Class A conveyor rollers."

PAGE 7

3.10.1, line 8, between "pins," and "or" insert "spring-loaded keepers,".

3.11, line 3, delete "MIL-T-704, Type A" and substitute "accepted commercial practice."

3.12, delete lines 3 thru 6.

PAGE 8

3.13.2, lines 2 through 4, delete second and third sentences.

4.1, delete wn its entirety and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

PAGE 9

4.4.1, line 2, add the following new sentence:

"Unless otherwise specified (see 6.2), a sample lot shall consist of conveyors of the same type, class, style, and size as offered for inspection at one time."

4.4.2, line 3, delete "6.5" and substitute "4.0"

4.4.3, line 2, delete "through 4.5.2.3" and substitute "and 4.5.2.2".

PAGE 10

4.5.2.2, line 2, between "of" and "8" insert "not more than"; lines 2 and 3, delete "equal to... (as applicable)" and substitute "of 50 plus or minus 0.25 pounds"; line 4, delete "wide" and substitute "long".

4.5.2.3, delete and substitute:

"4.5.2.3 Endurance. Two sections shall be coupled together and supported, at the ends and the coupling, in an inclined position of not more than 8 inches per section. A load equal to rated capacity of four rollers for Type I conveyors or four axles for Type II conveyors shall be placed at the raised end of the sections. The load shall be uniformly distributed over four rollers or axles. The load shall be carried continuously by gravity at a rate of approximately 60 feet per minute to the lower end of the sections. The test shall be repeated for a total of not less than 1000 cycles. At the completion of the test the sections shall be uncoupled and examined. Any evidence of damage or deformation of the conveyor or inability of the conveyor to allow the load to move freely shall constitute failure of this test."

PAGE 11

Defect 119, line 2, delete "C" and substitute "Commercial."

5.2, delete "C" and substitute "Commercial."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

PAGE 12

5.2.2, delete "Level C." and substitute "Commercial."

5.3, delete and substitute:

"5.3 Marking.

5.3.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial packaging. Marking shall be by any means which provides legibility and shall include the National Stock Number (NSN) or part number, nomenclature; quantity and unit of issue; contract, purchase order or delivery order number; and address."

6.2, after "(j)" add:

"(k) When sample lot shall be other than specified (see 4.4)."

PAGE 14

Delete Figure 1 (X-2351A) and substitute new Figure 1 dated 27 February 1975.

Custodians:
Army - ME
Navy - SA
Air Force - 99


Review activities:
Army - CE, SM, AT
DSA - CS

User activity:
Navy - MC

Preparing activity:
Army - ME

Project 3910-0056

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

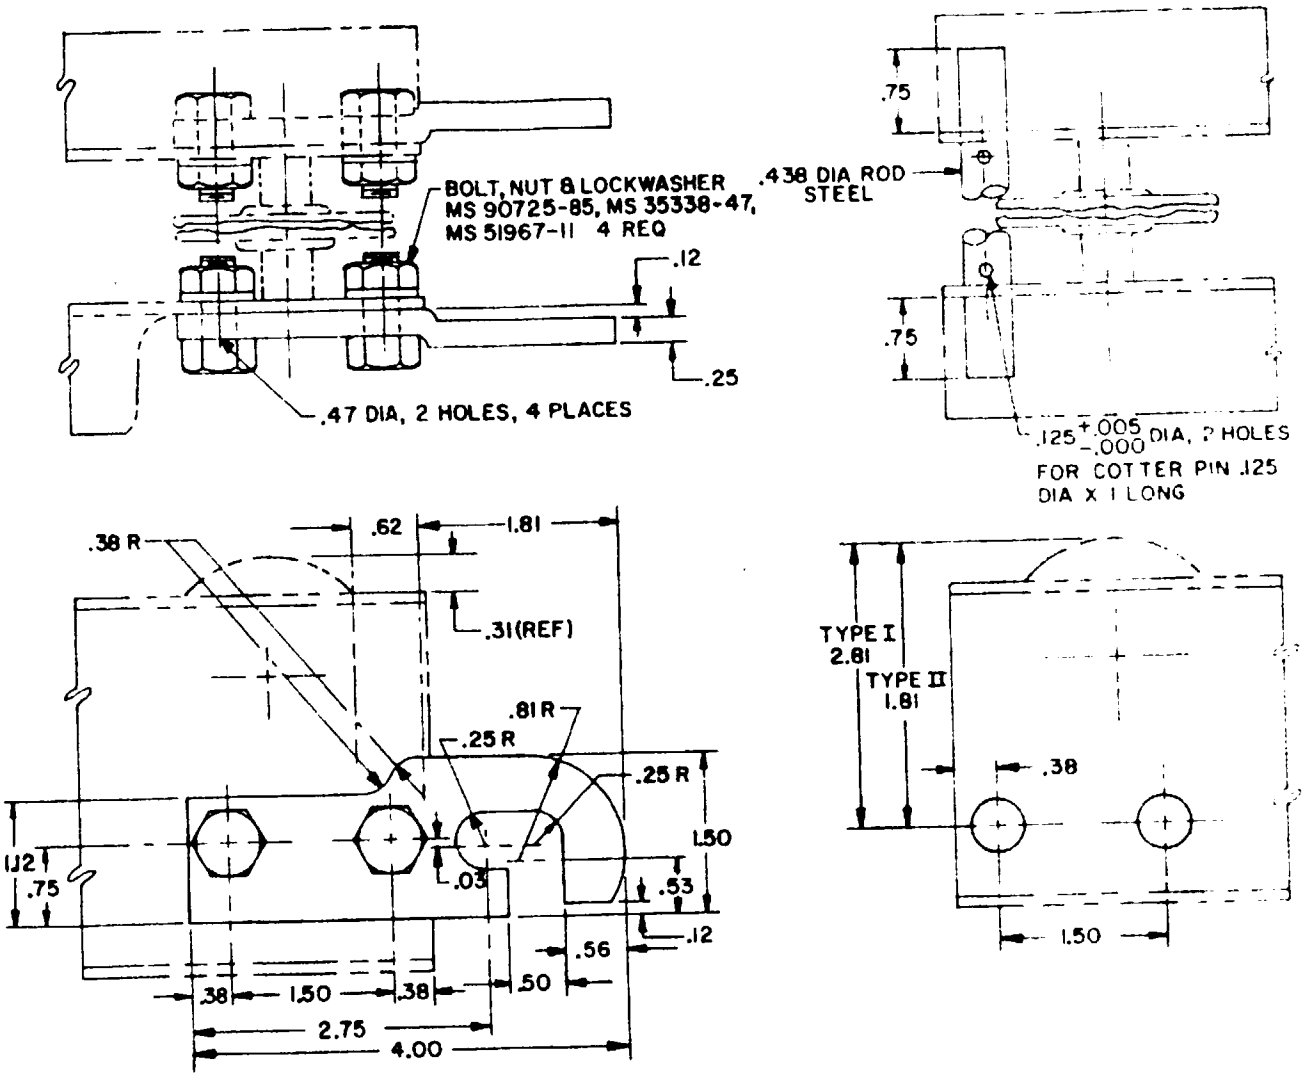

NOTE:
1. ALL DIMENSIONS ARE IN INCHES.

FIGURE 1. Hook & rod coupler.

X-3895

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.