MIL-C-11218E
1 August 1988
SUPERSEDING
MIL-C-11218D
28 May 1974

MILITARY SPECIFICATION

CONVEYORS, ROLLER AND WHEEL, GRAVITY AND CONVEYOR SUPPORTS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers gravity conveyors and adjustable supports for general use in loading, unloading and handling materials.

1.2 Classification. Conveyor sections shall be of the following types, classes, styles and sizes as specified (see 6.2 and 6.3):

Type I - Roller

Class A - Steel, 1000 pound capacity

Style I - Straight section

Size 1 - 10 inches between side rails.
Size 2 - 12 inches between side rails.
Size 3 - 16 inches between side rails.
Size 4 - 18 inches between side rails.
Size 5 - 25 inches between side rails.
Size 6 - 37 inches between side rails.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:44Z
Check the source to verify that this is the current version before use.

Style 2 - 45 degree curved section.

Size 2 - 12 inches between side rails.
Size 3 - 16 inches between side rails.
Size 4 - 18 inches between side rails.

Style 3 - 90 degree curved section.

Size 5 - 25 inches between side rails.

Class B - Aluminum, 500 pound capacity.

Style 1 - Straight section.

Size 1 - 10 inches between side rails.
Size 3 - 16 inches between side rails.

Style 2 - 45 degree curved section.

Size 3 - 16 inches between side rails.

Type II - Wheel

Class A - Steel, 800 pound capacity.

Style 1 - Straight section.


Size 1 - 10 inches between side rails.
Size 3 - 16 inches between side rails.
Size 4 - 18 inches between side rails.

Style 2 - 45 degree curved section.

Size 1 - 10 inches between side rails.
Size 3 - 16 inches between side rails.
SIze 4 - 18 inches between side rails.

1.3 Specification part numbering system. The specification part number of conveyors covered by this specification shall be designed in the following form (see 3.12 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

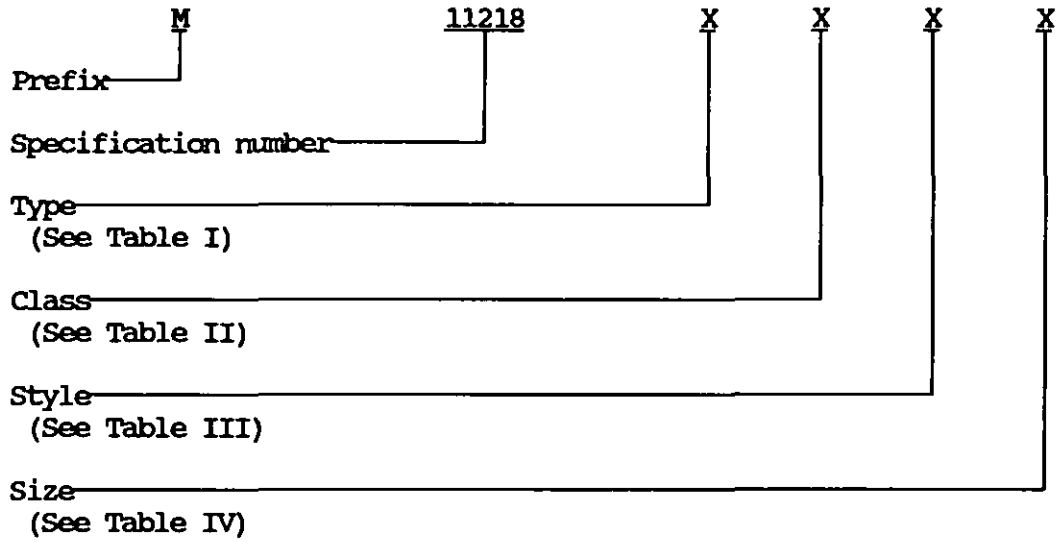

Example: M11218IA12 - Type I Roller, 1000 lbs. capacity (steel), straight section, 12 inches between rails.

1.3.1 Type. The following types of conveyors shall be designated as follows:

TABLE I. Types.

Type	
I	Roller
II	Wheel

1.3.2 Class. The following classes of conveyors shall be designated as follows:

TABLE II. Classes.

Class	
A	Steel, 100 lbs capacity (for Type I only)
A	Steel, 800 lbs capacity (for Type II only)
B	Aluminum, 500 lbs capacity (for Type I only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

1.3.3 Style. The following styles of conveyors shall be designated as follows:

TABLE III. Style.

Style	
1	Straight section
2	45 degree curved section
3	90 degree curved section

1.3.4 Size. The following sizes of conveyors shall be designated as follows:

TABLE IV. Size.

Size	Inches Between Side Rails
1	10
2	12
3	16
4	18
5	25
6	37

2. APPLICABLE DOCUMENTS

2.1 Applicable documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

QQ-P-416 - Plating, Cadmium (Electrodeposited).
QQ-S-775 - Steel Sheets, Carbon, Zinc-Coated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-C-52950	- Crate, Wood, Open and Covered.
MIL-G-81322	- Grease, Aircraft, General Purpose, Wide Temperature Range.

STANDARDS

MILITARY

DOD-STD-100	- Engineering Drawing Practices.
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.
MS35338	- Washer, Lock-Spring, Helical, Regular (Medium) Series (IN/MM).
MS51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (IN/MM).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

(Copies of the specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B633	- Electrodeposited Coatings of Zinc on Iron and Steel.
D3951	- Standard Practice for Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The conveyors shall consist of straight sections, 45-degree and 90-degree sections, and the supports used to support the conveyors. The conveyors shall be the gravity feed type. Capacities shall conform to the applicable class specified.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of conveyors from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish conveyors conforming to this specification.

3.2.1 Part numbering of interchangeability parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of DOD-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Plating. Cadmium plating shall conform to QQ-P-416, type II, class 1. Zinc coating shall be in accordance with ASTM B633, type II, SC4 (Fe/Zn25) or QQ-S-775, class d. Threaded parts shall be plated in accordance with QQ-P-416, type II, class 3.

3.3.2 Material deterioration prevention and control. The conveyors shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the conveyors may be exposed.

3.3.3 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.4 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.3.5 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the conveyors may be newly fabricated from recovered materials to the maximum extent practicable, provided the conveyors produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the conveyors.

3.4 Construction. The conveyor sections and conveyor supports shall be constructed in accordance with the contractors standard commercial practice, except as specified herein. There shall be no evidence of failure or permanent deformation or deflection in excess of 0.25 inches measured at the center of the lead, when conveyor sections are tested as specified in 4.5.2.1 conveyor rollers and wheels shall revolve freely and there shall be no evidence of bearings, roller or wheel damage, or internal bearing friction preventing items from moving freely along the conveyor when tested as specified in 4.5.2.2.

3.5 Sections. Each section shall consist of formed, rolled, or extruded side rails, crossmembers and axles with rollers or wheels. Each section shall be equipped with a hook and rod coupler (see figure 1 and 6.4), so that any number of sections may be coupled together to form a continuous conveyor. The coupler supplied shall be capable of mating with that depicted by figure 1.

3.5.1 Style 1 straight section. Each straight section shall be 10 feet $\pm$0.1250 inch long (not including the hook coupler). Straight sections shall be provided with axles spaced 3 inches apart (from axle center), and the first and last axles shall be 1-1/2 inches from either end.

3.5.2 Curved sections. Curved sections shall have a nominal radius of 36 inches to the inside rail.

3.5.2.1 Style 2, 45 degree curved section. The 45 degree curved section shall have 12 axles equally and symmetrically spaced.

3.5.2.2 Style 3, 90 degree curved section. The 90 degree curved section shall have 24 axles equally and symonetrically spaced.

3.5.2.3 Axle holes. Axle holes shall be positioned so that the top of the roller or wheel extends not less than 0.3125 nor more than 0.375 inch above the side rails.

3.6 Guard rails. Unless otherwise specified (see 6.2), guard rails shall be provided for each curved section of the conveyors. Guard rails shall have the same radius as the outer side rail and each end shall be flared outward. Guard rails shall extend not less than 3.5 inches above the carrying surface of the rollers or wheels. Guard rails shall be removable and adjustable to a point against the outer side rail to a point at least 6 inches beyond the outer side rail. Guard rails and their brackets shall be of the same material as the conveyor side rail. Both ends of the guard rail shall be flared outward not less than 2 inches beyond the extended radius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.7 Crossmembers. Crossmembers shall be provided to align and brace the side rails and to accommodate the support arms. Crossmembers shall be formed, rolled, or extruded metal and shall be securely fastened to the side rails by welding or with through bolts and self-locking nuts. Straight sections shall have not less than three crossmembers. The 45 degree sections shall have not less than four crossmembers. Corss members shall be placed as near each end of the section as practicable and the remaining members shall be equally spaced between the end members. Corss members shall be of the same material as the side rails.

3.8 Conveyor supports. When specified (see 6.2), portable, collapsible supports shall be provided to support the sections of size 1, size 2, size 3, and size 4 conveyors. Supports shall have a minimum vertical adjustment range of 30 to 50 inches above the floor. A method of locking the support in any position shall be provided. The design static load capacity of each support shall be not less than 400 pounds with an overload of 300 percent. The number of supports required shall be as specified (see 6.2). The conveyor supports shall be provided with slots to engage the crossmembers on each section. The size of the engaging portion shall be as follows:

For size 1 - 9-1/2 inch arm length.
For size 2 - 11-1/2 inch arm length.
For size 3 - 15-1/2 inch arm length.
For size 4 - 17-1/2 inch arm length.

3.9 Type I, roller conveyor. Each roller conveyor shall consist of two identical side rails with axle mounted rollers between the side rails.

3.9.1 Rollers. Rollers shall be between 1.875 and 2.125 inches in diameter. The ends of each roller shall be fitted with ball or roller bearings. Bearings shall be press fitted into the end of each roller, and shall be permanently lubricated with grease conforming to MIL-G-81322. Seals shall be provided for each bearing to retain the grease and to prevent water and dust from entering. Axles shall be of steel rod and shall be cadmium or zinc plated. Axles shall not turn wit the rollers.

3.9.2 Class A, steel. Class A conveyors shall have steel side rails and rollers. Rollers shall be cadmium or zinc plated in accordance with 3.3.1. The design capacity of class A conveyors shall be 1000 pounds with an overload factor of 200 percent for each section, with a minimum capacity of 150 pounds for each roller. The minimum length of each roller for the various sizes shall be as follows:

Size 1 - 9 inches.
Size 2 - 11 inches.
Size 3 - 15 inches.
Size 4 - 17 inches.
Size 5 - 24 inches.
Size 6 - 36 inches.

3.9.3 Class B, aluminum. Class B conveyors shall have aluminum side rails and rollers except the two end rollers for each section shall be in accordance with class A conveyor rollers. The design capacity of class B conveyors shall be 500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

pounds, with a safety factor of 200 percent for each section, with a minimum capacity of 80 pounds for each roller. The minimum length for each roller for the various sizes shall be as follows:

Size 1 - 9 inches
Size 3 - 15 inches

3.10 Type II, steel conveyors. Type II conveyors shall be of steel and shall consist of side rails, wheels, and longitudinal strengthening bars. The capacity of type II conveyors shall be 800 pounds, with a safety factor of 200 percent for each section.

3.10.1 Wheels. The wheels shall be of steel and shall be between 1.875 and 2.125 inches in diameter. Each wheel shall have a minimum load capacity of 25 pounds. Each wheel shall be fitted with a ball or roller bearing. Bearings shall be fitted in the wheels, and shall be permanently lubricated with grease conforming to MIL-G-81322. Seals shall be provided for each bearing to retain the grease and to prevent water and dust from entering. Axles shall be round steel rod and shall be retained in side rails with retainer rings, cotter pins, spring-loaded keepers, or self-locking nuts. Axles shall not turn with the wheels. The axles and the wheels shall be cadmium or zinc plated. Wheels shall be equally spaced on the axles and shall be staggered on alternate axles. Spacers shall be provided to maintain the spacing between wheels on each axle. The number of wheels for each axle for the various size conveyors shall be as follows:

Size 1 - 3 wheels
Size 3 - 4 wheels
Size 4 - 4 wheels

3.10.2 Longitudinal strengthening bars. Not less than two steel longitudinal strengthening bars for size 1 conveyors and not less than three for size 3 and 4 conveyors shall be provided, and shall be equally spaced between the side rails. Strengthening bars shall be not less than 1 inch in width and shall be of sufficient length to engage all the axles.

3.11 Treatment and painting. Components of the conveyor which are of steel and are not cadmium or zinc plated shall be treated and painted in accordance with accepted commercial practice. Unless otherwise specified (see 6.2), color of the final coat shall be the color normally used by the contractor.

3.12 Marking for identification. Each section of the conveyor, and the supports (when provided), shall be marked in accordance with MIL-STD-130, and shall include the specification part number (see 1.3).

3.13 Workmanship. The quality of workmanship shall be such as to produce conveyors that are in accordance with the requirements of this specification and insure proper functioning of all parts of the conveyor. Metal surfaces shall be free from burrs, slivers, or sharp edges which may prove injurious to operating personnel or cause damage to conveyed loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

3.13.1 Welding. The mating surfaces of any parts to be welded shall be free from scale, paint, grease, oxide film and other foreign matter. The welding shall be done by any method compatible with the filler and parent metals. Welds may be ground, filed, buffed or chipped, but not hammered. Welded joints shall be free from defects such as parent metal cracks, cracks in weld metal, lack of fusion, lack of penetration, lack of prescribed fit, slag inclusion, or spatter.

3.13.2 Bolted connections. Boltholes shall be accurately formed and shall be free from burrs.

3.14 Human factors engineering. The conveyors and supports shall conform to human factors engineering design criteria as described in MIL-STD-1472. Special design emphasis shall be given, but not limited to, paragraphs 4 (general requirements), 5.4, (controls), 5.5 (labeling), 5.6 (anthropometry), 5.9 (design for maintainability), and 5.13 (hazards and safety) of MIL-STD-1472, as applicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

4.3.1 Examination. The first article conveyor shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article conveyor shall be tested as specified in 4.5.2.1 through 4.5.2.3. When conveyor supports are supplied they shall be tested as specified in 4.5.2.4. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, inspection level II. Unless otherwise specified (see 6.2), a sample lot shall consist of conveyors of the same type, class, style, and size as offered for inspection at one time.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. Acceptable quality level (AQL) shall be 1.0 percent defective for major defects and 4.0 percent defective for minor defects.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1 and 4.5.2.2. When conveyor supports are supplied they shall be tested in accordance with 4.5.2.4. AQL for conveyors and conveyor supports shall be 1.0 percent defective.

4.5 Inspection procedures.

4.5.1 Examination. The conveyors shall be examined as specified herein for the following defects:

Major

101. Material not as specified (see 3.3).
102. Plating not as specified (see 3.3.1).
103. Dimensions not as specified.
104. Curved sections not as specified (see 3.5.2).
105. Axle holes not as specified (see 3.5.2.3).
106. Guard rails not as specified (see 3.6).
107. Crossmembers not as specified (see 3.7).
108. Supports not as specified (see 3.8).
109. Rollers not as specified (see 3.9.1).
110. Wheels not as specified (see 3.10.1).
111. Longitudinal strengthening bars not as specified (type II only) (see 3.10.2).
112. Workmanship not as specified (see 3.13).
113. Human Factors Engineering not as specified (see 3.14).
114. Bolted connections and welding not as specified (see 3.13.1, 3.13.2).
115. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.2).
116. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

117. Contractor does not have documentation available for identification of material, material finishes, or treatment (see 3.3.4).
118. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the conveyors (see 3.3.5).

Minor

201. Marking not as specified (see 3.12).
202. Treatment and painting not as specified (see 3.11).

4.5.2 Tests.

4.5.2.1 Load. One complete conveyor section supported at both ends by conveyor supports or in a similar manner shall be loaded with an equally distributed load twice the design capacity of the section. Curved sections shall be supported at each end and at one point near the center of the arc. The load shall remain on the conveyor for not less than 15 minutes. A deflection of more than 0.25 inch, or any damage or permanent deformation shall constitute failure of this test.

4.5.2.2 Roll. Two sections shall be coupled together and supported in an inclined position of not more than 8 inches per section. A load of 50 ±0.25 pounds shall be placed in a wooden box 10 inches long by the width of the conveyor. The box with its load shall be placed in the high end of the conveyor and released. No force shall be applied to start the box moving. Inability of the two sections to connect properly or inability of the conveyor to allow the box to move freely down the conveyor to the low end shall constitute failure of this test.

4.5.2.3 Endurance. Two sections shall be coupled together and supported, at the ends and the coupling, in an inclined position of not more than 8 inches per section. A load equal to rated capacity of four rollers for type I conveyors or four axles for type II conveyors shall be placed at the raised end of the sections. The load shall be uniformly distributed over four rollers or axles. The load shall be carried continuously by gravity at a rate of approximately 60 feet per minute to the lower end of the sections. The test shall be repeated for a total of not less than 1000 cycles. At the completion of the test the sections shall be uncoupled and examined. Any evidence of damage or deformation of the conveyor or inability of the conveyor to allow the load to move freely shall constitute failure of this test.

4.5.2.4 Conveyor support. The conveyor support shall be extended to its maximum height and a static load of 1200 pounds placed on the support arm. The load shall remain on the support arm for not less than 15 minutes. Any evidence of permanent deformation, fracture, or slipping of the height adjustment shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article pack inspection.

4.6.1.1 Examination. The first article pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 1.0 percent defective.

119.	Preservation not as specified for level A.
120.	Minimum cube utilization not realized through disassembly of guard rails from the conveyor sections.
121.	Containers not as specified for level A. Each incorrect container shall constitute one defect.
122.	Conveyor sections unlike description packed together for level A.
123.	Crate for curved sections not constructed in a rectangular manner for level A.
124.	Supports not packed as specified for level A.
125.	Blocking, bracing and anchoring not as specified for level A.
126.	Strapping not as specified for level A.
127.	Conveyor sections, guard rails and supports not packed as specified for commercial.
128.	Marking missing, illegible, incorrect or incomplete for level A or commercial.

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the time frame specified (see 6.2), to prove prior to starting production packing, that the preservation, packing and marking comply with the packaging requirements of this specification. Examination shall be those specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.5). The first article pack may be accomplished by utilizing either the first article pack model conveyor or a production conveyor. If the first article pack model conveyor is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government when requested by the Government to facilitate comparison between the first article model conveyor and production conveyor.

5.2 Preservation.

5.2.1 Disassembly. To effect minimum cube utilization, the guard rails and supports shall be disassembled form the conveyor sections. The mounting fasteners shall be reinstalled in one of the mating parts and secured to prevent their loss.

5.2.2 Level A. All rollers and wheels of class A conveyors, nuts, bolts, washers and any other components subject to corrosion shall be coated with P-9 preservative as in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

5.3 Packing. Packing shall be level A or commercial as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 Conveyor sections and guard rails. A minimum of two conveyor sections of like description, including the disassembled guard rails, shall be packed in a close-fitting, open wood crate conforming to MIL-C-52950, style A, type II; the contents shall not exceed the maximum net load and dimension limitations of the crate. The crate for the curved sections shall be constructed in a rectangular manner to provide minimum cube. The contents shall be blocked, braced and anchored in accordance with the appendix of the crate specification to prevent damage and free movement. All required strapping shall be finish B.

5.3.1.2 Supports. Supports, when procured, shall be packed together in a close-fitting, open wood crate conforming to MIL-C-52950, style A, type optional; however, the contents shall not exceed the maximum net load and dimension limitations of the crate. The contents shall be blocked, braced, and anchored within the crate in a manner to prevent free movement and damage in accordance with the appendix to the crate specification. The supports shall be shipped separate from, but at the same time as the conveyors. All required strapping shall be finish B.

5.3.2 Commercial. The conveyor sections, guard rails and supports shall be packed in accordance with ASTM D 3951. As a minimum, items shall be utilized into a minimum number of loads by use of pallets, boxes, or crates. Unitized loads must permit easy handling by fork truck, or other available material handling equipment.

5.4 Marking.

5.4.1 Level A. In addition to any special marking required by the contract or order, bundles or shipping containers shall be marked in accordance with MIL-STD-129.

5.4.2 Commercial. Marking shall be in accordance with ASTM D 3951. In addition, each shipping container or unitized load shall be marked with the cube and gross weight.

6. NOTES

6.1 Intended use. The conveyors covered by this specification are intended for use with or without supports to conveyor materials to or from freight cars, trucks, trailers or other commercial or military carriers. Other uses include material handling within warehouses and field storage areas.

6.2 Ordering data. Acquisition documents shall specify the following:

a. Title, number and date of this specification.
b. Specification part number required (see 1.3).
c. Type, class, style and size of conveyor required (see 1.2).
d. Time frame required for the submission of first article model and number of models required (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

e. When the Government will conduct any or all of the first article model examination and tests. When the Government will conduct some but not all of the first article examination and tests, the contracting officer shall specify which examination and test will be conducted by the Government and which examination and tests will be conducted by the contractor (see 4.1 and 6.3).
f. When guard rail assemblies are not required (see 3.6).
g. When supports are required and number of supports required (see 3.8).
h. Color required if other than that normally supplied (see 3.11).
i. Time frame required for submission of first article pack (see 5.1).
j. Level of packing required (see 5.3).
k. When sample lot shall be other than specified (see 4.4.1).
l. Data required to be furnished with each conveyor (see 6.6).

6.3 First article. When a first article inspection is required, the items shall be a preproduction model. The first article shall consist of one or more units. The contracting officer shall include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article (see 6.2).

6.4 Information figure. Figure 1 shows a hook and rod coupling which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishing of other couplings which conform to this specification (see 3.5).

6.5 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, package, pack, and mark the conveyors in accordance with this specification.

6.6 Data requirements. The contracting officer shall include requirements for such data as technical publications, instructional materials, illustrated parts lists, and supplier's maintenance and operation manual to be furnished with each conveyor (see 6.2).

6.7 Provisioning. The contracting officer shall provide provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instruction on shipment of conveyors.

6.8 Subject term (key word) listing.

Conveyors
Gravity and conveyors
Roller and wheel

6.9 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ME
Navy - SA
Air Force - 99

Review activities:

Army - CE
DLA - CS
Air Force - 84

User Activities:


Army - SM
Navy - MC

Preparing activity:

Army - ME

Project 3910-0189

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

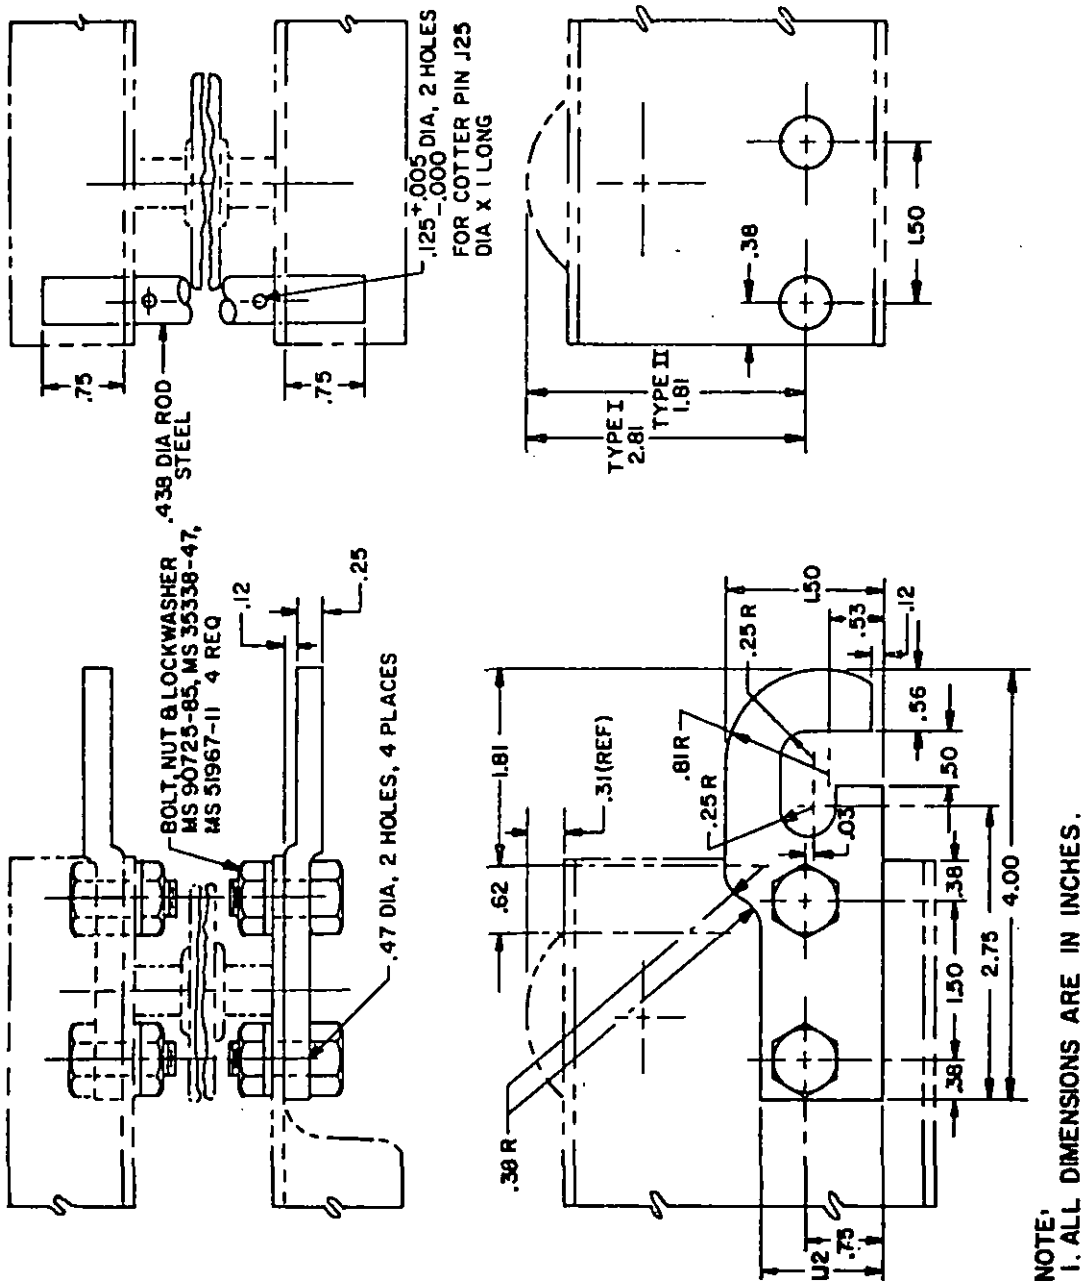

X-3895

FIGURE 1. Hook & rod coupler.

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 - 604-033/92876

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-11218E	Conveyors, Roller and Wheel, Gravity and Conveyor Supports

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:44Z
Check the source to verify that this is the current version before use.