MIL-U-11224E
28 March 1977
SUPERSEDING
MIL-U-11224D
12 September 1969

MILITARY SPECIFICATION

* UMBRELLA, SURVEYOR'S (SIX-RIB)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a water-repellent surveyor's umbrella.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester.
V-T-295 - Thread, Nylon.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document Should be addressed to: U.S. Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8340

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:45Z
Check the source to verify that this is the current version before use.

QQ-P-416	-	Plating, Cadmium (Electrodeposited).
QQ-W-428	-	Wire, Steel, Carbon (High Carbon, Round, for Mechanical Springs, General Purpose).
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

MIL-T-3530	-	Thread, and Twine; Mildew Resistant or Water Repellent Treated.

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U.S. Military Property.
MIL-STD-147	-	Palletized Unit Loads for 40" x 48" Pallets.
MIL-STD-1363	-	Measurement of Wood Moisture Content.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:45Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.2 and 6.3).

3.2 Materials and components.

* 3.2.1 Cloth, duck, cotton. The cloth for the fabric portion, before finishing, shall be 8.25 ounces per square yard (280 g/m^2) and shall conform to type III of CCC-C-419.

3.2.1.1 Color and treatment. The cloth shall be dyed and finished to conform to type I, class B, shade Olive Drab 7 of CCC-D-950.

3.2.2 Thread. The thread for all stitching shall be polyester, nylon, or cotton, at the option of the manufacturer. The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to weathering equal to or better than the standard sample. If no standard sample is available, the thread shall show good fastness to weathering.

3.2.2.1 Thread, polyester. The polyester thread shall conform to type I, class 1, sub-class B, size E of V-T-285.

3.2.2.2 Thread, nylon. The nylon thread shall conform to type I or II, class 1, size E of V-T-295.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.

3.2.2.3 Thread, cotton. The cotton thread shall conform to type IB3 for needle and type IA3 for bobbin, ticket No. 12, 4 ply of V-T-276. Cotton thread shall be mildew-resistant treated in accordance with type I, class 1 of MIL-T-3530.

3.2.3 Wire, spring, steel. The spring steel wire, 0.192 +0.015, -0.010 inch (4.9 +0.4, -0.3 mm) in diameter, shall conform to type I of QQ-W-428.

* 3.2.4 Hardwood. Wooden poles shall be fabricated from white ash, beech, birch, elm, hickory, maple, oak, pecan, sweet gum, or other hardwood suitable for the intended purpose and shall be uniformly dried to a moisture content of not more than 12 percent at the time of fabrication, when tested as specified in 4.3.1.1. The slope of the grain shall not exceed 1 inch (25 mm) in 12 inches (300 mm) on any face when tested as specified in 4.4.1. Hardwood, except ash, shall weigh not less than 32 pounds per cubic foot (513 kg/m^3) at 12 percent moisture content when tested as specified in 4.3.1.1. Ash shall weigh not less than 38 pounds per cubic foot (609 kg/m^3) at 12 percent moisture content.

* 3.2.5 Tube, metal. Metal poles shall be fabricated from aluminum alloy, corrosion resisting steel, or cadmium plated steel. The wall thickness and alloy shall be the same as used in the manufacturer's commercial practice (see 4.3.1.2).

3.3 Design. The umbrella shall be a water-repellent canvas, six-rib design supported by a wooden or metal pole.

3.4 Construction. The construction shall conform to the requirements specified herein.

3.4.1 Pole. The pole shall consist of two sections with an overall height of 81 to 96 inches (2060 to 2440 mm) and shall be fabricated from hardwood or metal. Hardwood poles shall be 1-3/8 $\pm$ 1/8 inches (35 $\pm$ 3 mm) in diameter with a metal shoe on the lower pole section. The top section of a metal pole shall be 1-1/4 +3/16, -1/16 inches (32 +5, -2 mm) outside diameter, the bottom section shall have one tapered end in lieu of a metal shoe and shall be of such diameter that it forms a smooth sliding fit when inserted into the top section.

3.4.1.1 Pole joint. The two sections of the pole shall be joined by a zinc plated steel or aluminum alloy ferrule and socket connection of adequate length. The joint of both wood and metal poles shall be provided with a suitable locking arrangement which will prevent the two sections of the pole from being accidentally separated.

* 3.4.1.2 Pole cap. A zinc plated steel or aluminum alloy cap, or a cadmium plated steel washer, cap, and ring shall be permanently sealed and attached to the pole. It shall be sealed with a petroleum product sealer to prevent the entrance of moisture. Alternatively, the notched ring may be fabricated from polypropylene (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.

* 3.4.1.3 Adjustable elbow. An adjustable elbow shall be placed in the upper section of the pole. The elbow shall permit the opened umbrella to be adjusted to the right and to the left to positions quarterway and halfway from the vertical. The elbow shall hold the opened umbrella at the desired position and shall be fabricated of aluminum alloy, zinc alloy, or cadmium plated steel.

* 3.4.1.4 Pole shoe. A zinc plated steel or aluminum alloy shoe shall be permanently sealed and attached to the hardwood poles. It shall be sealed with a petroleum product sealer to prevent the entrance of moisture.

* 3.4.2 Cover. The cotton duck cover, fabricated of gore type sections stitched together in a single turn back seam (seam type SSn-1), shall be attached to the outer ends of the ribs by any means that will provide a secure and permanent fastening. The cover shall also be secured at the center, ± 4 inches (100 mm), of each rib with a metal clamp, cloth tape, or other suitable arrangement. The outer edge of the cover may be a selvage or a raw edge. A selvage edge may be finished plain or it may be turned back on itself and stitched to form a 3/8 inch (10 mm) hem (type EFa-1). A raw edge shall be finished in a 1/4 inch (6 mm) double turnunder hem (EFb-1). All seams shall be sewed with 4 to 8 stitches per inch (1-1/2 to 3 stitches /cm) using stitch type 301 of FED-STD-751. When the umbrella is fully opened, the diameter shall not be less than 54 inches (1370 mm) or more than 68 inches (1730 mm).

3.4.2.1 Washers. The cloth reinforcing washers shall be adjacent to the inside and outside of the cover and shall be of sufficient size to insure that the pole cap and frame connector shall not be in contact with the cover. The cloth washers shall be firmly secured in place at the point of attachment of the cover to the pole.

* 3.4.3 Ribs and braces. The umbrella shall have six zinc plated or cadmium plated steel spring wire, or aluminum ribs and braces. The braces may also be fabricated from cold rolled steel. The ribs shall be not less than 32 inches (810 mm) nor more than 40 inches (1020 mm) long. The braces shall be not less than 11 inches (280 mm) nor more than 18 inches (460 mm) long. All connections of ribs and braces shall be either hinge joints or an alternate construction wherein the braces and ribs shall be connected to the raising sleeve and the umbrella frames by a crimped notch and runner over steel tees welded to the ends of the ribs and braces.

3.4.4 Raising sleeve. The raising sleeve shall be zinc or cadmium plated steel, aluminum, or polypropylene (see 6.4) of a diameter to provide a smooth sliding fit on the pole without binding.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.

3.4.5 Spring stop. The umbrella shall be held in the open position by a depressed-type, spring-steel wire stop fastened to the pole or by any suitable spring action device that locks the umbrella in an open position.

3.5 Finish.

3.5.1 Zinc plating. Zinc plating shall conform to type II, class 2 of QQ-Z-325.

3.5.2 Cadmium plating. Cadmium plating shall conform to class 2, type II of QQ-P-416.

3.5.3 Priming and painting. Steel frame components (pole joints, pole caps and raising sleeves) may be primed and painted in accordance with the manufacturer's commercial practice in lieu of being zinc or cadium plated.

3.5.4 Varnishing or lacquering. Hardwood poles shall be coated with a clear varnish or lacquer in accordance with the manufacturer's commercial practice.

3.6 Marking. The umbrella shall be identified in accordance with MIL-STD-130 on the upper section of the pole. The markings applied shall not interfere with the operation of the raising sleeve.

* 3.7 Workmanship. Cloth components shall be clean and free of holes, cuts, or tears. Thread tension shall be maintained so that there will be no thread breaks or loose stitching and seam allowances shall be maintained so that no run-offs, twists, pleats, puckers, or open seams shall result. All thread ends shall be trimmed to 1/2 inch (13 mm) or less. All thread breaks shall be overstitched a minimum of 1 inch (25 mm). Care shall be taken to see that no needle chews occur. Wood components shall not contain any roughness, splinter, runout of grain, loose knots, warp, twist, split or area of decay. Metal components shall be free of burrs, sharp edges or corroded areas and shall not be broken or malformed. Plastic components shall be free from cracks, chips, rough edges, pits, voids or blisters. The plating or varnishing shall be smooth, adherent and free from blisters, pits, cracks, voids, rough edges or other defects.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:45Z
Check the source to verify that this is the current version before use.

* 4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification (see 3.2.5).

* 4.2 First article inspection. When a first article is required (see 6.2), it shall be examined for defects listed in table II and for dimensions specified. Any visual defect or any dimension not within the specified requirements shall be cause for rejection of the first article.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, the wood for the pole, immediately prior to fabrication, shall be tested as specified in table I. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0, expressed in terms of defects per hundred units.

* TABLE I. Component tests

Component and lot expressed in terms of	Characteristics	Rqmts. para.	Test method or para.	Number deter. per sample unit	Results reported as	Sample unit
Wood (all pole blanks available)	Moisture content	3.2.4	MIL-STD-1363	3	Aver. of 3 deter. to nearest 0.5% 1/	1 pole
	Slope of grain	3.2.4	4.4.1	1	Pass or fail	1 pole
	Weight of hardwood	3.2.4	Approved commercial	1	To nearest 0.1 pound per cubic foot 2/ ($1\ kg/m^3$)	1 pole

1/ Any sample unit having a moisture content of more than 12 percent shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:45Z
Check the source to verify that this is the currenversion before use.

2/ Any sample unit, except ash, having a weight of less than 32 pounds (513 kg/m^3) per cubic foot at 12 percent moisture content shall be classified as a defect. Any sample unit of ash having a weight of less than 38 pounds (609 kg/m^3) per cubic foot at 12 percent moisture content shall be classified as a defect.

4.3.1.2 Certification. The wall thickness and alloy requirements of metal tubes specified in 3.2.5 may be accepted on the basis of the contractors certificate of compliance (see 4.1.1).

4.3.2 End item inspection. The lot shall consist of all completely fabricated umbrellas offered for inspection at one time. The sample unit shall be one completely fabricated umbrella. The inspection levels and AQLs shall be as specified in 4.3.2.3.

* 4.3.2.1 Visual examination. The completely fabricated umbrella shall be examined for defects in table II.

* TABLE II. Examination for visual characteristics

Examine	Defect	Classification Major	Minor
Fabric	Hole, cut, or tear.	X	
	Broken or missing yarn; multiple float clearly visible at normal inspection distance of approximately 3 feet (1 m).		X
Wood pole	Any loose knot or knothole.		X
	Any roughness or splinter.		X
	Any warp or bow.		X
	Any sound tight knot more than 1/4 inch (6 mm) in longer dimension.		X
	Any shake, split, or decay.		X
Metal pole	Cracked, broken, deformed, or bent out of shape.	X	
Plastic components	Crack, chip, or break.	X	
	Pit, void, blister, or rough edge.		X
Hardware, general	Burr or sharp edge which may cause injury in handling or damage to fabric.	X	
Components and assembly	Any component part not fabricated of applicable referenced material.	X	

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:45Z
Check the source to verify that this is the current version before use.

* TABLE II. Examination for visual characteristics (cont'd)

Examine	Defect	Classification Major	Classification Minor
Construction details	Any construction detail not performed as specified.	X	
Cloth cover	Cover not securely attached to the ribs as specified.	X	
	Outer edge not adequately hemmed (when edge is not a selvage).		X
	Cloth washers missing on inside or outside.	X	
	Washer not firmly secured in place.		X
Seams and stitching	Open seam:		
	- for more than 1/4 inch (6 mm) but not more than 1/2 inch (13 mm).		X
	- for more than 1/2 inch (13 mm).	X	
	Thread break overstitched less than 1 inch (25 mm).		X
	Two or more consecutive skipped stitches overstitched less than 1 inch (25 mm).		X
NOTE:	Thread break or consecutive skipped stitches not overstitched shall be classified as open seams.		
Seam type	Wrong seam type.		X
Stitch type	Wrong stitch type.		X
Stitches per inch	One or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified.		X
Hems	More or less than specified width by more than 1/8 inch (3 mm).	X	
Wood or metal pole (as applicable)	Not joined by a ferrule and socket connection of adequate length.	X	

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:45Z
Check the source to verify that this is the current version before use.

* TABLE II. Examination for visual characteristics (cont d)

Examine	Defect	Classification Major	Minor
Wood or metal pole (as applicable) (cont'd)	Adjustable elbow will not perform its intended function.	X	
	Locking joint missing.	X	
	Locking arrangement will not perform its intended function.	X	
	Pole shoe not permanently attached.		X
	Cap not firmly sealed in place.	X	
	Shoe or cap not weather-proofed.		X
	Burrs or sharp edges.		X
	Upper and lower sections cannot be joined.	X	
Ribs and braces	Less than six-ribs and braces.	X	
	Will not function as intended.	X	
	Not connected as specified.	X	
Raising sleeve	Not a smooth sliding fit on pole.	X	
	Excessive looseness (more than 1/8 inch (3 mm) clearance).		X
	Will not operate.	X	
Spring stop	Missing or not type specified.	X	
	Will not hold umbrella in open position.	X	
	Not securely anchored in groove.	X	
Finish	Any finish not as specified.		X
	Area of thin film or no film.		X
	Any area of corrosion.	X	
	Non-adherent; i.e., flaking, blistered, or peeled.		X
Design	Any characteristic not in accordance with specified requirements or with an approved preproduction sample.	X	
Marking	Omitted, illegible, or incorrect.	X	
	Misplaced.		X
Cleanness	Grease or oil stains; thread ends not trimmed to 1/2 inch (13 mm) or less.		X

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T15:45Z
Check the source to verify that this is the currentversion before use.

4.3.2.2 Examination for dimensional characteristics. Any dimension not within the specified tolerances shall be classified as a defect.

* 4.3.2.3 Inspection levels and AQLs. The inspection levels and AQLs, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection level	AQLs
For defects applicable to table I	II	2.5 Major 6.5 Total
For defects applicable to 4.3.2.2	S-3	4.0 One class

* 4.3.3 Packaging inspection. An examination shall be made to determine that packaging, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be closed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE III. Packaging inspection

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Bulged or distorted container.
Content	Number per container is more or less than specified.

4.3.4 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and reinforcing shall be in accordance with that specification.

4.3.5 Examination for palletization. When palletization is required, an examination shall be made to determine that palletization complies with the section 5 requirements. Defects shall be scored in accordance with table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:45Z
Check the source to verify that this is the current version before use.

The sample unit shall be one palletized unit load fully prepared for delivery. The lot shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

TABLE IV. Examination of palletization

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Not as specified. Container pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

4.4 Test.

* 4.4.1 Slope of grain. The slope of grain may be determined by combining the grain direction of two adjacent faces. When one of these faces is straight grained, the true slope of grain is shown on the other face. Where there is a slope in both faces, the true or combined slope is greater than the slope on either face. Slope of grain is shown on edge grained faces by the summer wood bands and on flat grained faces by resin ducts by the direction in which a free flowing ink or dye spreads or by the course taken by a narrow strip lifted by a knife point and torn out. Direction of fiber may also be measured by the Teco Slope of Grain Detector supplied by the Timber Engineering Co., Inc., Washington, DC. Any sample unit having a slope of grain exceeding 1 inch (25 mm) in 12 inches (300 mm) on any face shall be classified as a defect.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:45Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each umbrella shall be separated into two sections and placed within a snug-fitting fiberboard box conforming to style RSC (end opening), type CF (variety SW) or SF, class domestic, grade 175 of PPP-B-636. Box closure shall be secured with 2-inch (50 mm) minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

* 5.1.2 Commercial. Umbrellas shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A or B, or commercial, as specified (see 6.2).

5.2.1 Level A packing. Six umbrellas, packaged as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC (end opening) of PPP-B-636. Each shipping container shall be closed, waterproofed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B packing. Six umbrellas, packaged as specified in 5.1, shall be packed within a snug-fitting fiberboard shipping container conforming to style RSC (end opening), type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-B-320.

* 5.2.3 Commercial packing. Umbrellas, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

* 5.3 Palletization. When specified (see 6.2), umbrellas packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.

with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, any pallet pattern may be used provided approval is obtained from the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The umbrella is intended for use in shading surveying instruments from the direct rays of the sun.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article is required (see 3.1).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant boxes are required for level B shipments (see 5.2.2.1).
(e) When palletization is required (see 5.3).

* 6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one surveyor's umbrella. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test, and approval of the first article.

* 6.4 Material source. An impact resistant type polypropylene molding material, identified as OLEMER 6114, available from Amoco Chemical Corporation, Chicago, IL 60601, has been found acceptable for fabrication of the raising sleeve and the notched ring.

* 6.5 Figure. Figure 1, showing a type of umbrella which has been found acceptable, is included for illustration only and is not intended to preclude the furnishing of other designs which conform to the specification.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the currentversion before use.

6.6. Changes from previous issue. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - ME
DLA - CT

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 8340-0280

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:45Z
Check the source to verify that this is the current version before use.

for bids or request for proposal, form a part of this on date of invitation

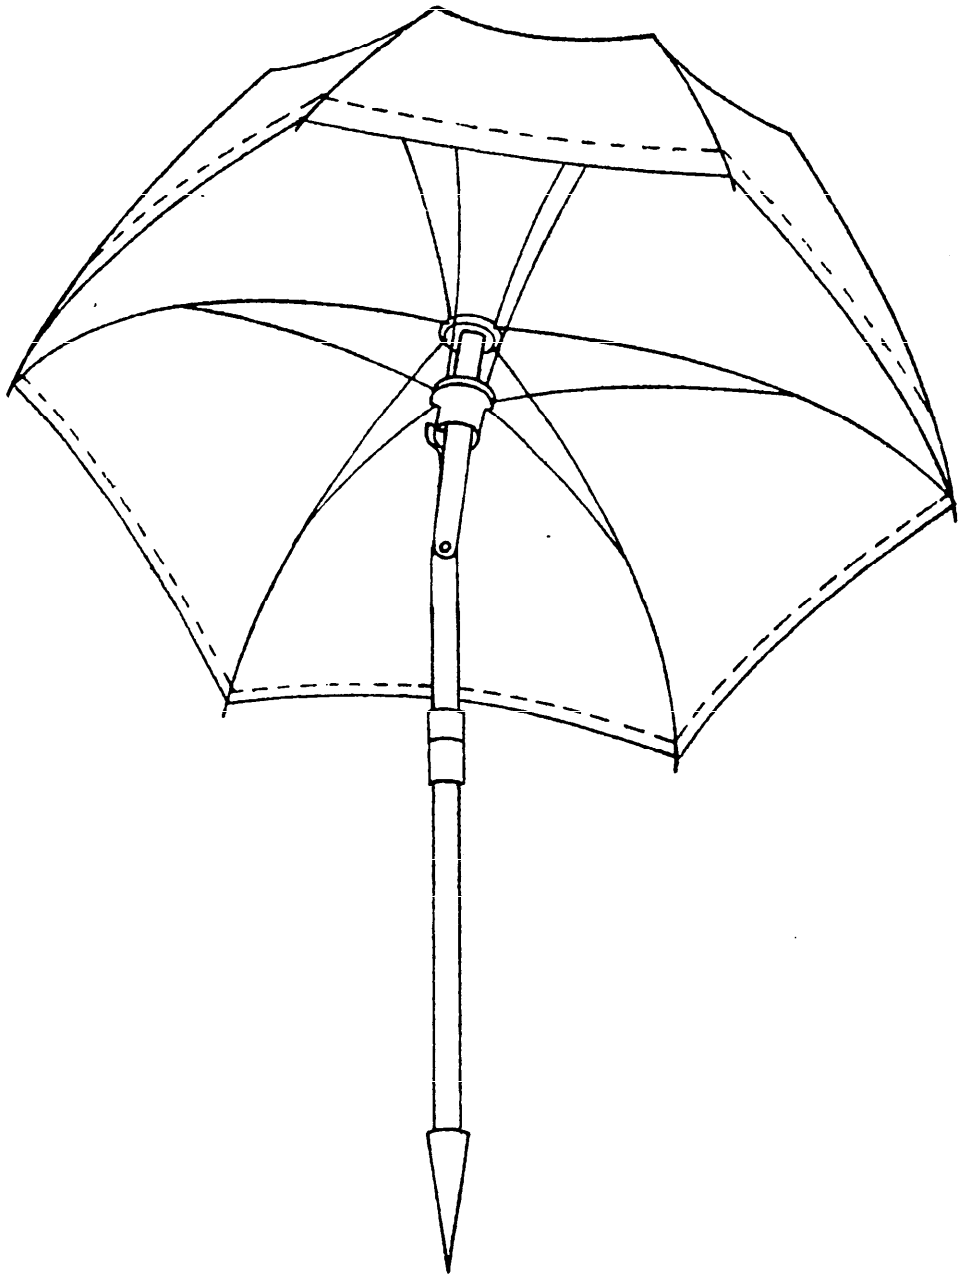


FIGURE 1-SURVEYOR'S UMBRELLA 2-2-240

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-U-11224E; Umbrella, Surveyor's (Six-Rib)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRXNM-TDI

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TDI
Natick, MA 01760

NATICK OP 1 Apr 76

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:45Z
Check the source to verify that this is the current version before use.