[METRIC]

MIL-C-49292/6
30 August 1989

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLIES, NONPRESSURE PROOF, FIBER OPTIC, METRIC, SINGLE FIBER, GLASS, MIL-C-83522 CONNECTORS AND DOD-C-85045 CABLES

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49292.

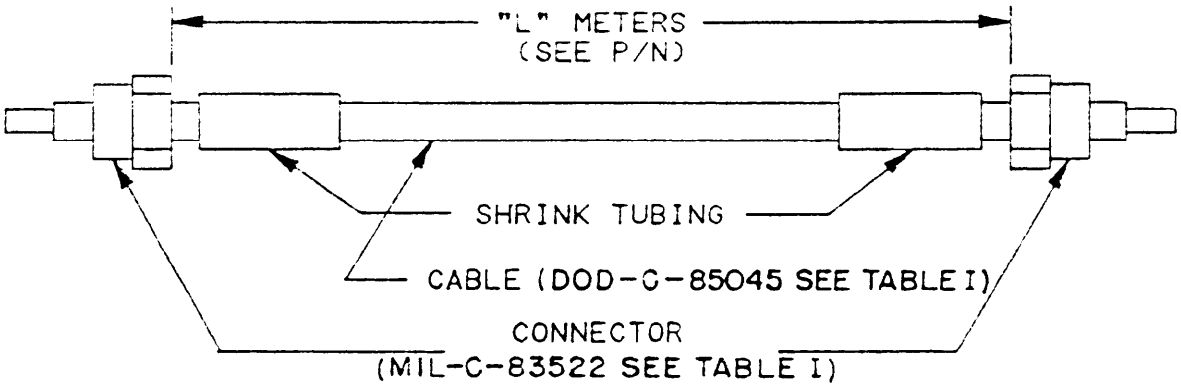


FIGURE 1. Outline drawing.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Component parts:

Connectors shall be in accordance with the following:

MIL-C-83522, two required (see table I).

Cable: MIL-C-85045 (see table I).

Assembly: In accordance with figure 1, and table I.

Length: In accordance with table I.

Weight: In accordance with table I.

Performance:

Optical requirements:

Insertion loss (maximum - assembly attenuation): See table I. Test method B1.

Bandwidth: ≥ 400 MHz-km at 1290 nm, ±10 nm.

Crosstalk: Not applicable.

Cable retention: 40 pounds at the MIL-C-83522 terminations.

Temperature range:

Operating: -40°C to +90°C.

Storage: -55°C to +125°C.

Life test: Life test shall be performed at +85°C ±5°C.

Part or Identifying Number (PIN): PINs shall be in accordance with table I.

TABLE I. PINs, cable length, assembly attenuation, and weight.

Military PIN M49292/6-	Cable length "L" (meters)	Maximum assembly attenuation (dB)		Maximum assembly weight (kg)
		At 820-890 nanometers	At 1100-1300 nanometers	
	Fiber size: 50/125 micron diameter Cable PIN: D85045/9-518 Connector PIN: M83522/1-03			
01	1000 ±10	8	5	15.0
02	500 ±5	5	3.5	7.5
03	300 ±3	3.8	2.9	4.5
04	200 ±3	3.2	2.6	3.0
05	100 ±3	2.6	2.3	1.5
06	50 ±2	2.3	2.2	.8
07	25 ±1	2.1	2.1	.4
08	10 ±1	2.1	2.1	.2

Source: https://assist.dla.mil -- Downloaded: 20260-22T20:01Z
Check the source to verify that this is the current version before use.

TABLE I. PINs, cable length, assembly attenuation, and weight - Continued.

Military PIN M49292/6-	Cable length "L" (meters)	Maximum assembly attenuation (dB)		Maximum assembly weight (kg)
		At 820-890 nanometers	At 1100-1300 nanometers	
	Fiber size: 100/140 micron diameter Cable PIN: D85045/9-C1B Connector PIN: M83522/1-04			
09	1000 ±10	7.5	4.5	15.0
10	500 ±5	4.5	3.0	7.5
11	300 ±3	3.3	2.4	4.5
12	200 ±3	2.7	2.1	3.0
13	100 ±3	2.1	1.8	1.5
14	50 ±2	1.8	1.7	.8
15	25 ±1	1.7	1.6	.4
16	10 ±1	1.6	1.6	.2

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI, SC
Navy - AS, CG, EC, MC
Air Force - 99
DLA - ES

User activities:
Army - AV
Navy - CG, MC

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6020-0002-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:01Z
Check the source to verify that this is the current version before use.