MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - POWER SUPPLY, HUNDREDS DECADE
MATRIX AND READOUT - A3: 10547230

This amendment forms a part of Military Specification MIL-C-60578(MU) dated 18 June 1970.

Paragraph 3.7.2.1, line 4: Delete "±0.30" and substitute "±0.5". Also in lines 5, 6 and 7, delete "±0.2" and substitute " ± 0.5".

Paragraph 3.7.2.2, line 2: Delete "2.0 ± 0.3" and substitute "3.0 ± 1.0".

Paragraph 3.7.2.3, line 4: Delete "2.5 ± .5 volts"and substitute "2.4 ± 1.2 volts". Also in line 5, delete "1.5 ± .5" and substitute "1.5 ± 0.6".

Paragraph 3.7.2.4, line 2: Delete "22.5" and substitute "21", also delete "7.5" and substitute "7".

Paragraph 4.3.4: Delete this paragraph in its entirety and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commander, Frankford Arsenal, ATTN: SMUFA-Q4000.

CHARACTERISTIC	TEST DATA TO COMPLY WITH
Cleaning	3.3.1.9
Drying	3.3.1.10
Coating Compound	3.3.1.11

"

Paragraph 4.6.5.1, line 3: Delete "8.2k and substitute "3.3k". In line 5, delete " ± .20" and substitute " ± .5". In line 6, delete " ± .2" and substitute " ± .5". In line 7, delete " ± .2" and substitue " ± .5".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

In line 8, delete " ± 0.30" and substitute " ± .5". In line 10, delete " ± 2.0 ± .3" and substitute "3.0 ± 1.0".

Paragraph 4.6.5.2, line 1: Delete "2.5 ± .5 volts" and substitute " 2.4 ± 1.2 volts. Also in lines 1 and 2, delete " 1 to 2" and substitute " 1.5 ± .6".

Paragraph 4.6.5.2b, line 3: Delete " 8.2K" and substitute " 3.3K".

Paragraph 4.6.5.4, second paragraph, line 3: Delete "8.2K" and substitute "3.3K."

Paragraph 4.6.5.5: In line 2, delete "22.5" and substitute "21"; in line 3, delete " $+22.5\ ^{+0}_{-2.5}$" and substitute "$21\ ^{+2}_{-0}$"; in line 4, delete "22.5" and substitute "23" and delete " +80 ± 3" and substitute "80 ± 10".

Paragraph 4.6.5.6: In line 2, delete " +7.5" and substitute " +7"; in line 3, delete " $+7.5\ ^{+0}_{-0.4}$" and substitute " $+7^{+1}_{-0}$"; in line 4, delete, " +8.0" and substitute "+9.0" and in line 5, delete " +80 ± 3" and substistitute "+80 ± 10".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Figure 2: Delete and substitute:

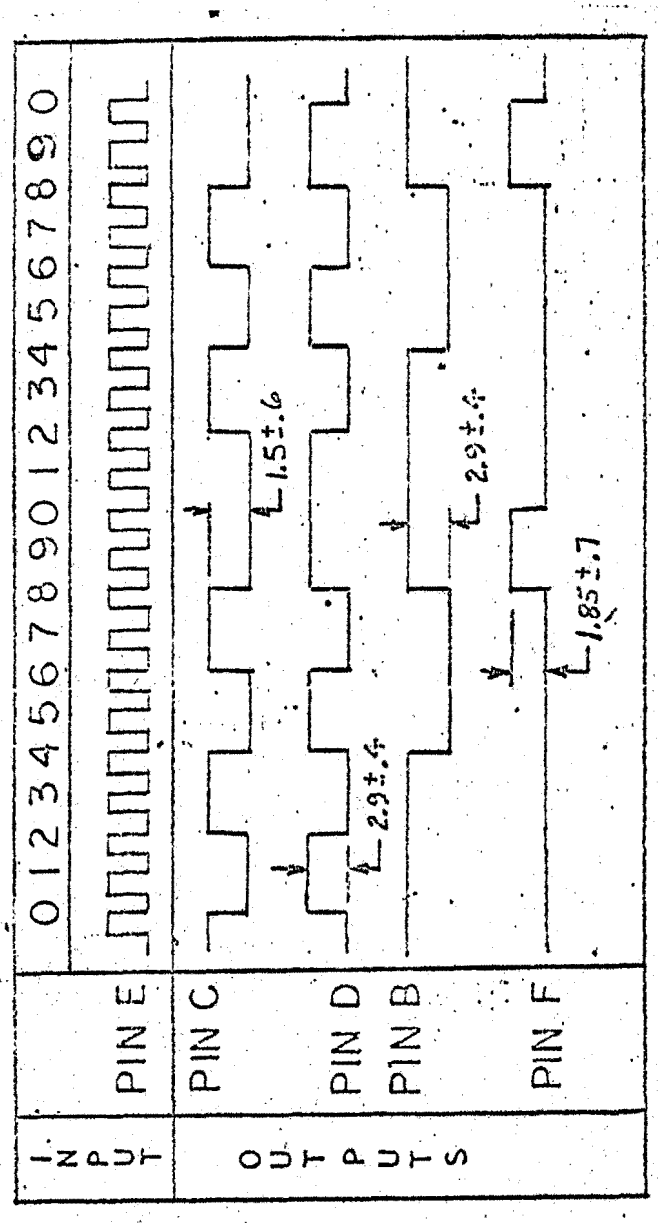


FIGURE 2 TIMING CHART

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Figure 3: Delete "8.2K Resistor on Pin J" and substitute "3.3K on Pin J".

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 1240-A390

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.