MIL-C-63371/3B(AR)
31 July 1984
SUPERSEDING
MIL-C-63371/3A(AR)
2 April 1981

MILITARY SPECIFICATION SHEET

CIRCUIT CARD ASSEMBLY, 9291224
(OPERATOR CONTROL BOX INTERFACE)

This specification is approved for use by the US Army Armament, Munitions and Chemcial Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circuit card assembly described herein shall consist of this document and the latest issue of specification MIL-C-63371(AR).

Electrical Requirements

1. All input frequencies and pulse widths shall be within plus or minus 5.0 percent of the values noted herein.

2. All input and output levels shall be consistent with the IC operating levels and power supply regulation and shall be within plus or minus 1.0 percent of the indicated nominal values, unless otherwise specified.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

BOARD POWER

NOTE: Maintain the following throughout all tests.

Pin No.	Voltage
2	14
37	14
35	0
70	0
1	0
36	0

JAMMED MINE

NOTE: Connect a 12 ohm, 48 watt resistor between pin 9 and 24 volts.

TEST 1A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
64	0	67	0
63	0	9	0
66	Pulse low for 1 sec		
62	Figure 1		
65	Figure 1		

TEST 1B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
64	0	67	14
63	0	9	24
66	Pulse low for 1 sec		
62	Figure 2		
65	Figure 2		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

TEST 1C

INPUT	
Pin No.	Voltage
64	0
63	0
66	Pulse low for 1 sec
62	Figure 3
65	Figure 3

OUTPUT	
Pin No.	Voltage
67	0
9	0

TEST 1D

INPUT	
Pin No.	Voltage
62	0
65	0
66	Pulse low for 1 sec
63	Figure 1
64	Figure 1

OUTPUT	
Pin No.	Voltage
67	0
9	0

TEST 1E

INPUT	
Pin No.	Voltage
62	0
65	0
66	Pulse low for 1 sec
63	Figure 2
64	Figure 2

OUTPUT	
Pin No.	Voltage
67	14
9	24

TEST 1F

INPUT	
Pin No.	Voltage
62	0
65	0
66	Pulse low for 1 sec
63	Figure 3
64	Figure 3

OUTPUT	
Pin No.	Voltage
67	0
9	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

TEST 1G

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	14
63	0	9	24
64	0		
62	Figure 4		
65	Figure 4		

TEST 1H

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	14
62	0	9	24
65	0		
63	Figure 4		
64	Figure 4		

TEST 1I

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	0
63	0	9	0
64	0		
62	Figure 5		
65	Figure 5		

TEST 1J

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	0
62	0	9	0
65	0		
63	Figure 5		
64	Figure 5		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

TEST 1K

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	14
63	0	9	24
64	0		
62	Figure 6		
65	Figure 6		

TEST 1L

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
66	Pulse low for 1 sec	67	14
62	0	9	24
65	0		
63	Figure 6		
64	Figure 6		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

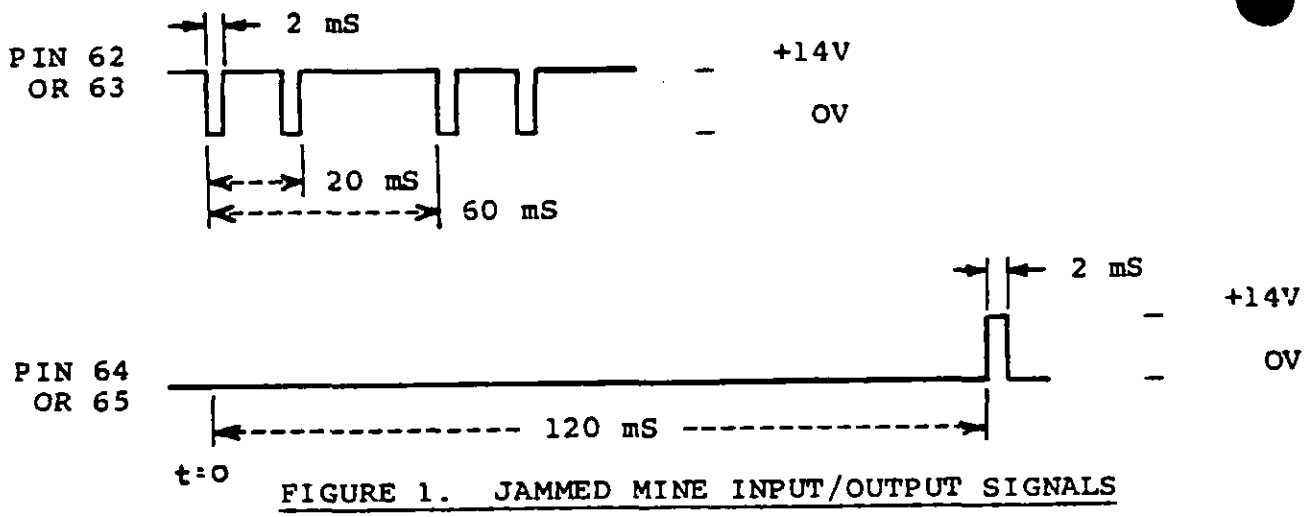


FIGURE 1. JAMMED MINE INPUT/OUTPUT SIGNALS

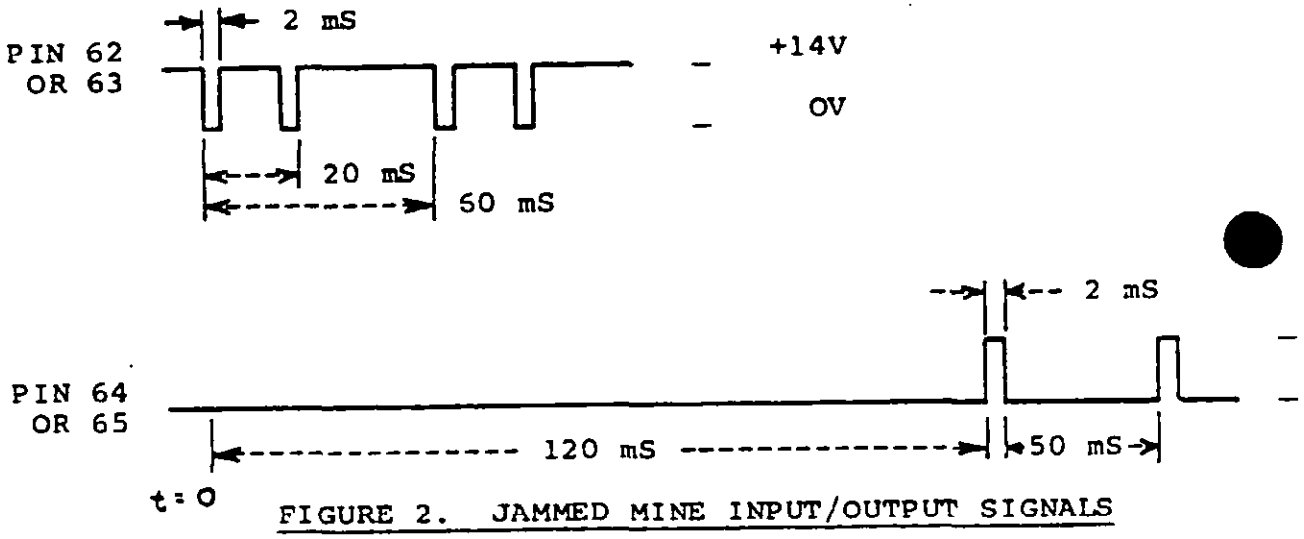


FIGURE 2. JAMMED MINE INPUT/OUTPUT SIGNALS

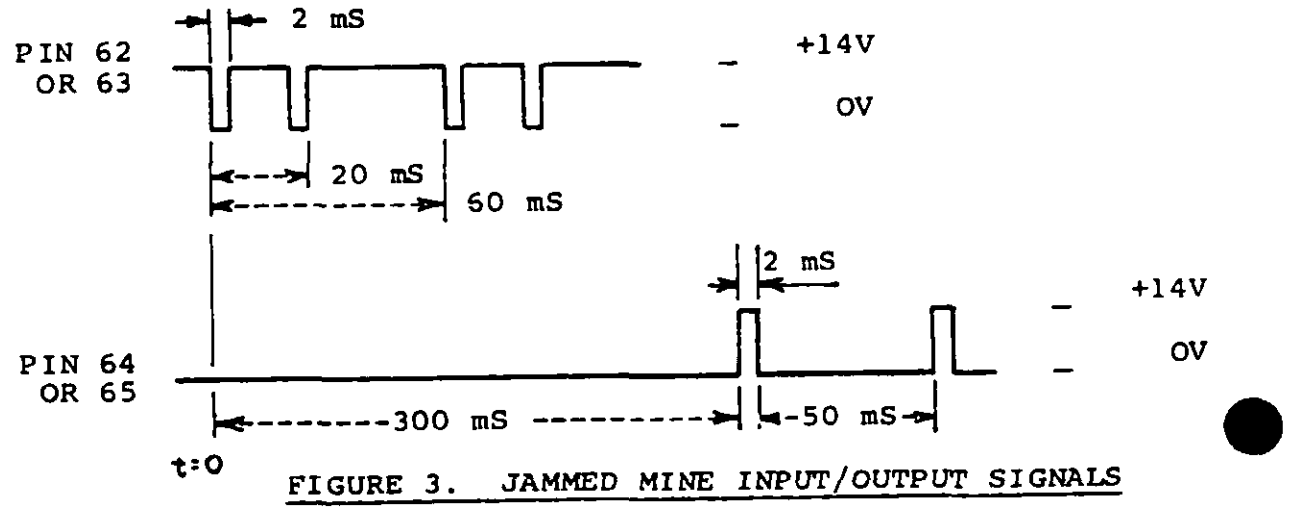


FIGURE 3. JAMMED MINE INPUT/OUTPUT SIGNALS

Source: https://assist.dla.mil -- Downloaded: 20261O-23T02:43Z
Check the source to verify that this is the current version before use.

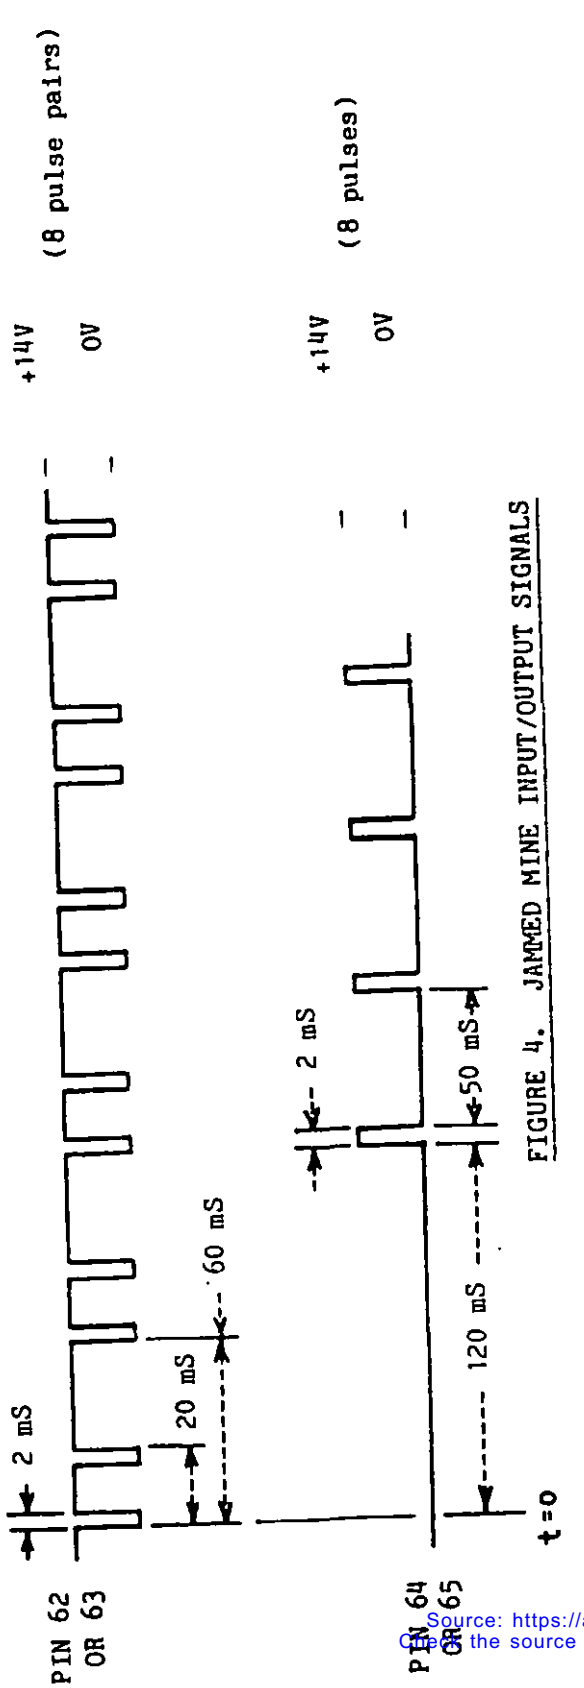


FIGURE 4. JAMMED MINE INPUT/OUTPUT SIGNALS

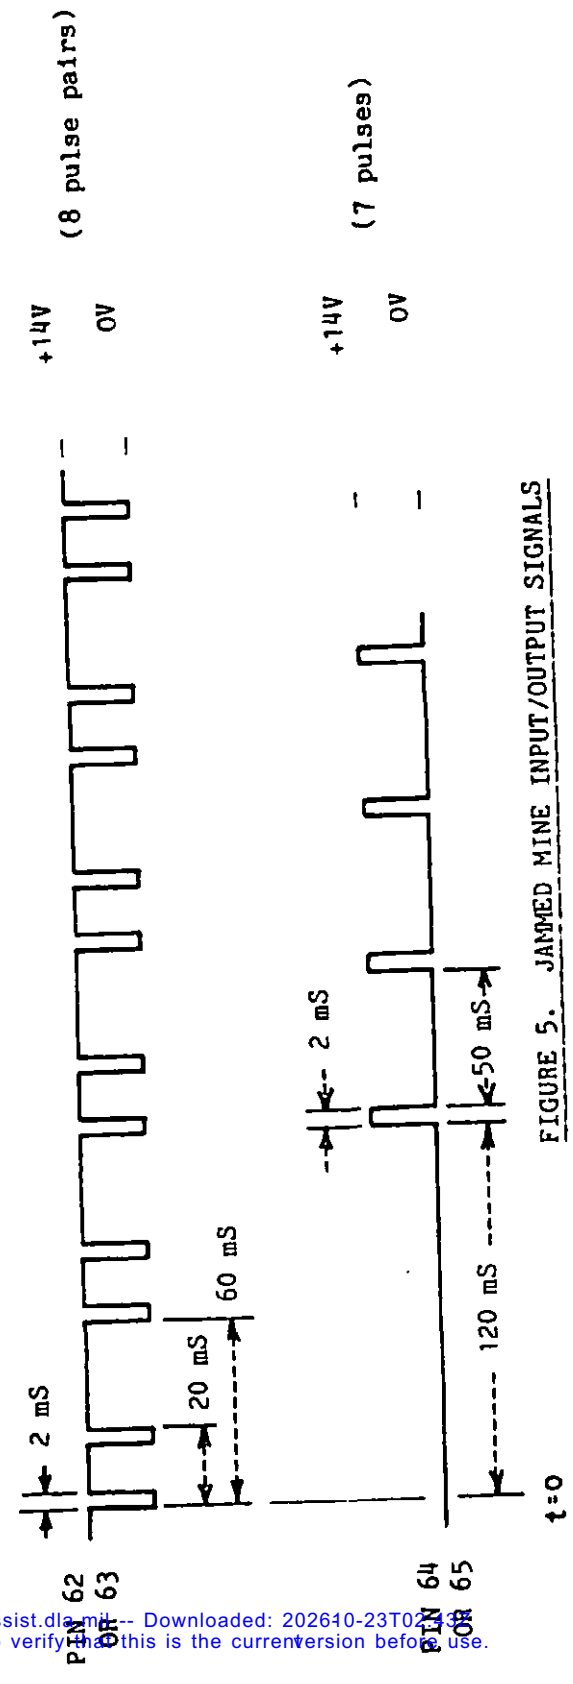


FIGURE 5. JAMMED MINE INPUT/OUTPUT SIGNALS

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:43:
Check the source to verify that this is the current version before use.

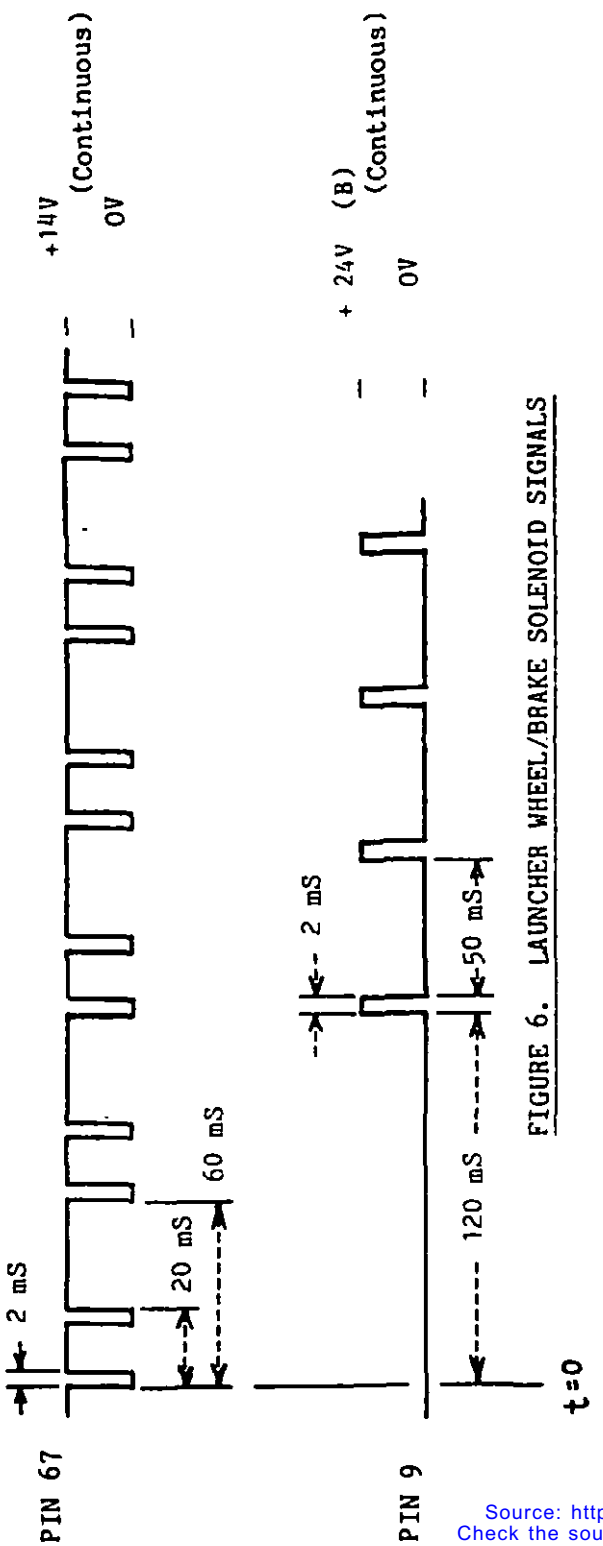


FIGURE 6. LAUNCHER WHEEL/BRAKE SOLENOID SIGNALS

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

DATA SWITCH TEST

NOTE: All inputs should sink 14 mA each minimum.

Data Switch No.	INPUT		OUTPUT	
	Pin No.	Voltage	Pin No.	Voltage
1	48	0	49	Low
1	48	14	49	14
2	38	0	39	Low
2	38	14	39	14
3	40	0	47	Low
3	40	14	47	14
4	46	0	41	Low
4	46	14	41	14
5	42	0	45	Low
5	42	14	45	14
6	44	0	43	Low
6	44	14	43	14
7	50	0	61	Low
7	50	14	61	14
8	60	0	51	Low
8	60	14	51	14
9	52	0	59	Low
9	52	14	59	14
10	58	0	53	Low
10	58	14	53	14
11	54	0	57	Low
11	54	14	57	14
12	56	0	55	Low
12	56	14	55	14

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1095-A140/3)

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:43Z
Check the source to verify that this is the current version before use.