MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES: CLAMP-HALVES FOR 4-BOLT SPLIT-FLANGE FITTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this specification and the latest issue of MIL-F-52525.

1. The fitting shall conform to figure 1 and table I.

TABLE I. Dimensions for standard service split-flange clamp-halves.

Specification part number	Nominal flange size	D		F		J	
		±0.010	±0.25	±0.005	±0.13	±0.010	±0.25
	inch	inch	mm	inch	mm	inch	mm
M52525/16-8	1/2	1.219	30.96	0.245	6.22	0.955	24.26
M52525/16-12	3/4	1.531	38.89	0.245	6.22	1.265	32.13
M52525/16-16	1	1.781	45.24	0.295	7.49	1.515	38.48
M52525/16-20	1-1/4	2.031	51.59	0.295	7.49	1.720	43.69
M52525/16-24	1-1/2	2.406	61.09	0.295	7.49	2.000	50.80
M52525/16-32	2	2.844	72.24	0.355	9.02	2.470	62.74
M52525/16-40	2-1/2	3.344	84.94	0.355	9.02	2.950	74.93
M52525/16-48	3	4.031	102.39	0.355	9.02	3.580	90.93
M52525/16-56	3-1/2	4.531	115.09	0.422	10.72	4.030	102.36
M52525/16-64	4	5.031	127.79	0.422	10.72	4.530	115.06

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for standard service split-flange clamp-halves. (Cont'd)

Specification part number	Nominal flange size	O				P	
		Inch		Millimeter		±0.030	±0.80
	inch	max	min	max	min	inch	mm
M52525/16-8	1/2	2.16	2.09	54.9	53.1	0.86	21.8
M52525/16-12	3/4	2.59	2.53	65.8	64.3	0.98	24.9
M52525/16-16	1	2.78	2.72	70.6	69.1	1.11	28.2
M52525/16-20	1-1/4	3.16	3.09	80.3	78.5	1.39	35.3
M52525/16-24	1-1/2	3.72	3.66	94.5	93.0	1.58	40.1
M52525/16-32	2	4.06	3.94	103.1	100.1	1.86	47.2
M52525/16-40	2-1/2	4.56	4.44	115.8	112.8	2.09	53.1
M52525/16-48	3	5.38	5.25	136.7	133.4	2.53	64.3
M52525/16-56	3-1/2	6.06	5.94	153.9	150.9	2.70	68.6
M52525/16-64	4	6.44	6.31	163.6	160.3	2.95	74.9

Specification part number	Nominal flange size	Q		R		S		T	
		±0.010	±0.25					±0.010	±0.25
	inch	inch	mm	inch	mm	inch	mm	inch	mm
M52525/16-8	1/2	1.500	38.10	0.31	8	0.31	8	0.344	8.74
M52525/16-12	3/4	1.875	47.63	0.40	10	0.34	9	0.406	10.31
M52525/16-16	1	2.062	52.37	0.48	12	0.34	9	0.406	10.31
M52525/16-20	1-1/4	2.312	58.72	0.56	14	0.41	10	0.469	11.91
M52525/16-24	1-1/2	2.750	69.85	0.67	17	0.47	12	0.531	13.49
M52525/16-32	2	3.062	77.77	0.81	21	0.47	12	0.531	13.49
M52525/16-40	2-1/2	3.500	88.90	0.96	24	0.50	13	0.531	13.49
M52525/16-48	3	4.188	106.38	1.18	30	0.56	14	0.656	16.66
M52525/16-56	3-1/2	4.750	120.65	1.34	34	0.62	16	0.656	16.66
M52525/16-64	4	5.125	130.18	1.49	38	0.62	16	0.656	16.66

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for standard service split-flange clamp-halves. (Cont'd)

Specification part number	Nominal flange size	U		V		W		X	
						±0.010	±0.25	±0.010	±0.25
	inch	inch	mm	inch	mm	inch	mm	inch	mm
M52525/16-8	1/2	0.50	13	0.75	19	0.750	19.05	0.344	8.74
M52525/16-12	3/4	0.56	14	0.88	22	0.938	23.83	0.438	11.13
M52525/16-16	1	0.62	16	0.94	24	1.031	26.19	0.515	13.08
M52525/16-20	1-1/4	0.56	14	0.88	22	1.156	29.36	0.594	15.09
M52525/16-24	1-1/2	0.62	16	1.00	25	1.375	34.93	0.703	17.86
M52525/16-32	2	0.62	16	1.03	26	1.531	38.89	0.844	21.44
M52525/16-40	2-1/2	0.75	19	1.50	38	1.750	44.45	1.000	25.40
M52525/16-48	3	0.88	22	1.62	41	2.094	53.19	1.219	30.96
M52525/16-56	3-1/2	0.88	22	1.12	28	2.375	60.33	1.375	34.93
M52525/16-64	4	1.00	25	1.38	35	2.562	65.07	1.531	38.89

2. The maximum operating pressures shall be as specified in table II.

TABLE II. Maximum operating pressure for clamp-halves.

Specification part number	Nominal flange size	Maximum recommended operating pressure	
	inch	PSI	MPa
M52525/16-8	1/2	5000	34.5
M52525/16-12	3/4	5000	34.5
M52525/16-16	1	5000	34.5
M52525/16-20	1-1/4	4000	27.6
M52525/16-24	1-1/2	3000	20.7
M52525/16-32	2	3000	20.7
M52525/16-40	2-1/2	2500	17.2
M52525/16-48	3	2000	13.6
M52525/16-56	3-1/2	500	3.4
M52525/16-64	4	500	3.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

3. Marking shall include the manufacturer's name or trademark. Location of marking is optional.

INTENDED USE: The clamp-halves are designed to secure standard series flange head type fittings to ports.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size of clamp-halves covered by this specification sheet. The military specification sheet number and the code number for size of clamp-halves are combined to form the military specification part number.

EXAMPLE: Military specification part number

	M52525/16	-8
Military specification sheet number		
Size code number for clamp-halves (see table I)		

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A is Clamp-Halves.

Custodian:
Army - ME


Review activity:
DLA - CS

User activities:
Army - GL
Air Force - 99

Preparing activity:
Army - ME

Project 4730-0529

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

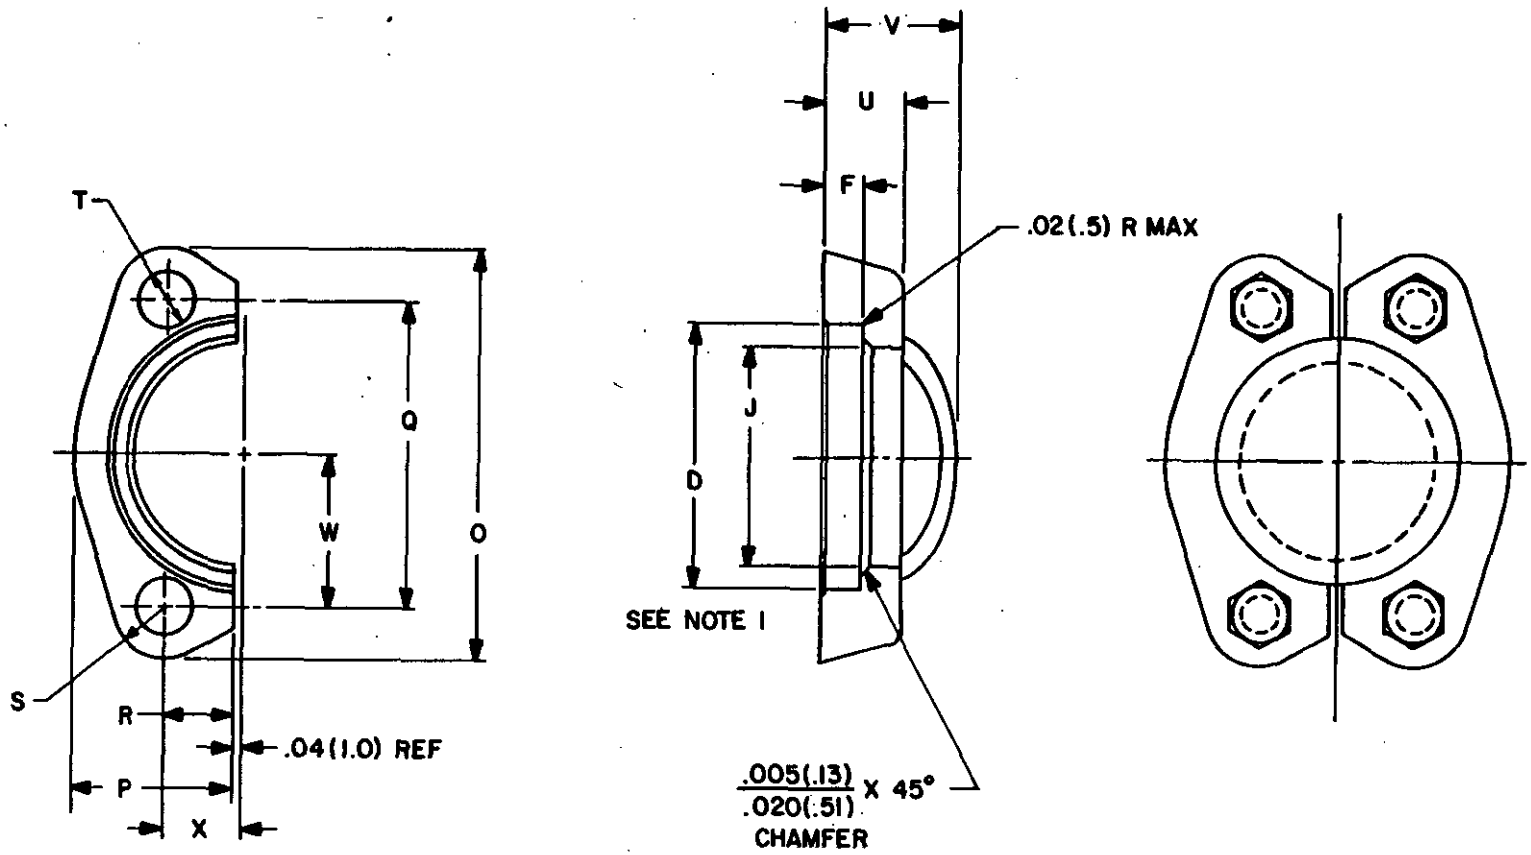

NOTES:

1. D AND J TO BE CONCENTRIC WITHIN .010(.25) F.I.M.
2. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES(MILLIMETERS).

FIGURE 1. Clamp-half: hydraulic, 4-bolt split flange type.

X-3384

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.