INCH-POUND

MIL-DTL-55302/18B
w/AMENDMENT 1
4 December 2018
SUPERSEDING
MIL-DTL-55302/18B
24 March 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PIN, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.200 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


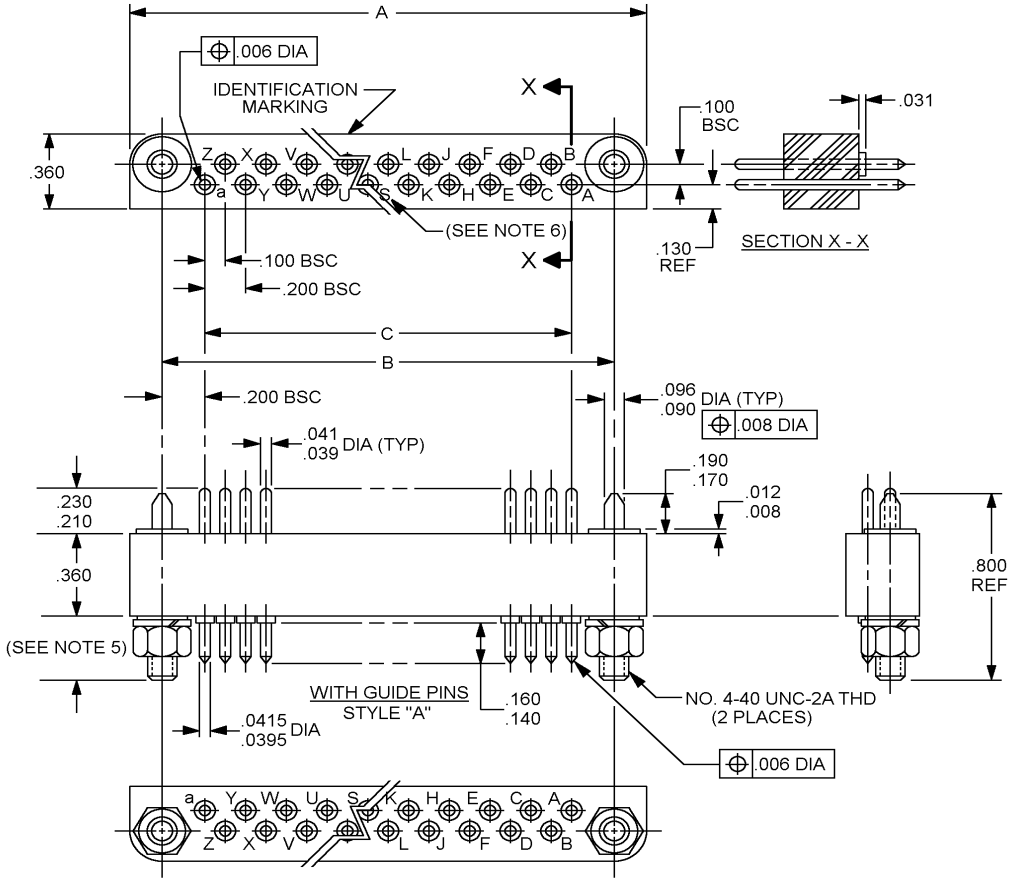


FIGURE 1. Connectors, plug (.200 spacing).


AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

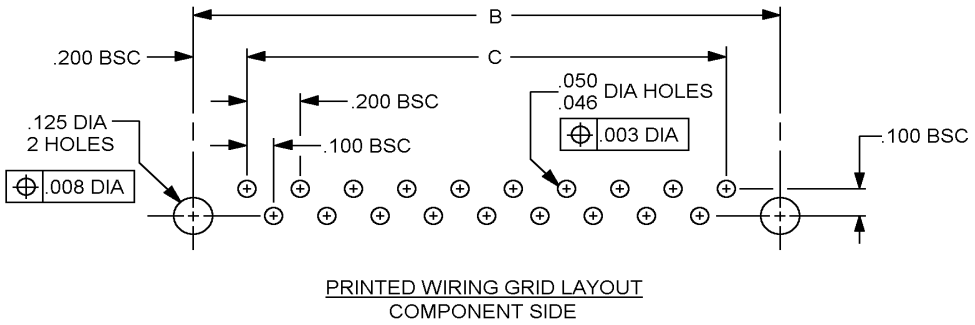

PRINTED WIRING GRID LAYOUT
COMPONENT SIDE

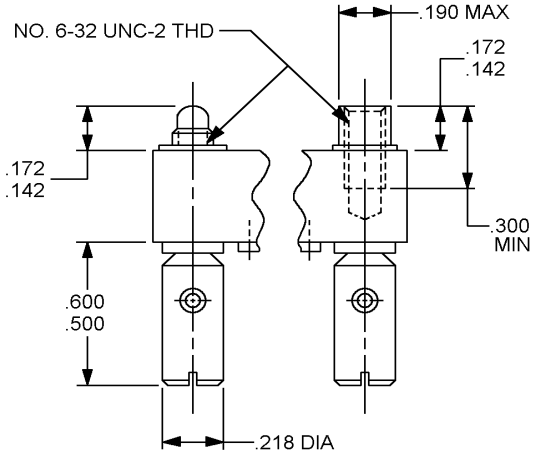

WITH ROTATING SCREWLOCKS
STYLE "C"

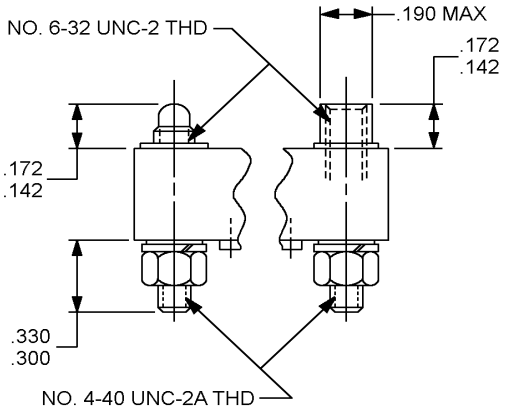

WITH FIXED SCREWLOCKS
STYLE "D"

Dimensions and Part or Identifying Number (PIN).

Mounting styles	Guide pins	Rotating screw-locks	Fixed screw-locks	Number of contacts	Dimensions		
PIN M55302/18-( )	Dash number	Dash number	Dash number		A ±.010	B BSC	C Ref
	01	07	13	7	1.300	1.000	.600
	02	08	14	9	1.500	1.200	.800
	03	09	15	11	1.700	1.400	1.000
	04	10	16	15	2.100	1.800	1.400
	05	11	17	19	2.500	2.200	1.800
	06	12	18	23	2.900	2.600	2.200
	19	20	21	37	4.300	4.000	3.600

FIGURE 1. Connectors, plug (.200 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.100	2.54	.218	5.54	1.400	35.56
.006	0.15	.125	3.18	.230	5.84	1.500	38.10
.008	0.20	.130	3.30	.300	7.62	1.700	43.18
.012	0.30	.140	3.56	.330	8.38	1.800	45.72
.031	0.79	.150	3.81	.360	9.14	2.100	53.34
.0395	1.00	.156	3.96	.500	12.70	2.200	55.88
.0415	1.05	.160	4.06	.600	15.24	2.500	63.50
.046	1.17	.165	4.19	.800	20.32	2.600	66.04
.050	1.27	.190	4.83	1.000	25.40	2.900	73.66
.090	2.29	.200	5.08	1.200	30.48	3.600	91.44
.096	2.44	.210	5.33	1.300	33.02	4.000	101.60
						4.300	109.22

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. These connectors mate with connectors specified in MIL-DTL-55302/17 and are primarily for use with single-sided and double-sided printed wiring board.
5. Mounting screws for .062 (1.57 mm) and .094 (2.39 mm) thick printed wiring boards shall be .250 (6.35 mm) long.
6. Contact identification letters may be molded as shown on horizontal.

FIGURE 1. Connectors, plug (.200 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1, and note 5.

Material:
Style B mounting and guidance hardware shall be brass rod, C36000, half hard as specified in ASTM B16/B16M, nickel plated .0002 inch thick in accordance with SAE-AMS-QQ-N-290. Styles C and D mounting guidance hardware shall be corrosion resistant steel in accordance with ASTM A276/A276M, class 303, passivated in accordance with SAE AMS2700.

Contact identification:
Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.

Mating and unmating:
The maximum insertion force, in pounds, shall not exceed a value equal to 1.0 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.25 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance:
The average resistance of all contact pairs measured shall not exceed 0.015 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.

Dielectric withstanding voltage:
Sea level: 1,000 volts rms, 60 cycles, ac.
High altitude: 500 volts rms, 60 cycles, ac.

Pin size: 20.
Wire size: 20.
Current rating: 7.5 amperes.

PIN: See figure 1.

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/17
ASTM A276/A276M
ASTM B16/B16M
SAE AMS2700
SAE-AMS-QQ-N-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AT, CR4, MI
Navy - AS, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5935-2018-138)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.