INCH-POUND

MIL-C-55302/62G
8 April 1993
SUPERSEDING
MIL-C-55302/62F
26 August 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND
INTERMEDIATE POSITIONS OF 14, 24, 44, 54, AND 26, 36, 56, AND 66 FOR
PRINTED WIRING BOARDS (100 INCH SPACING)

This specification is approved for use by all Departments
and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302


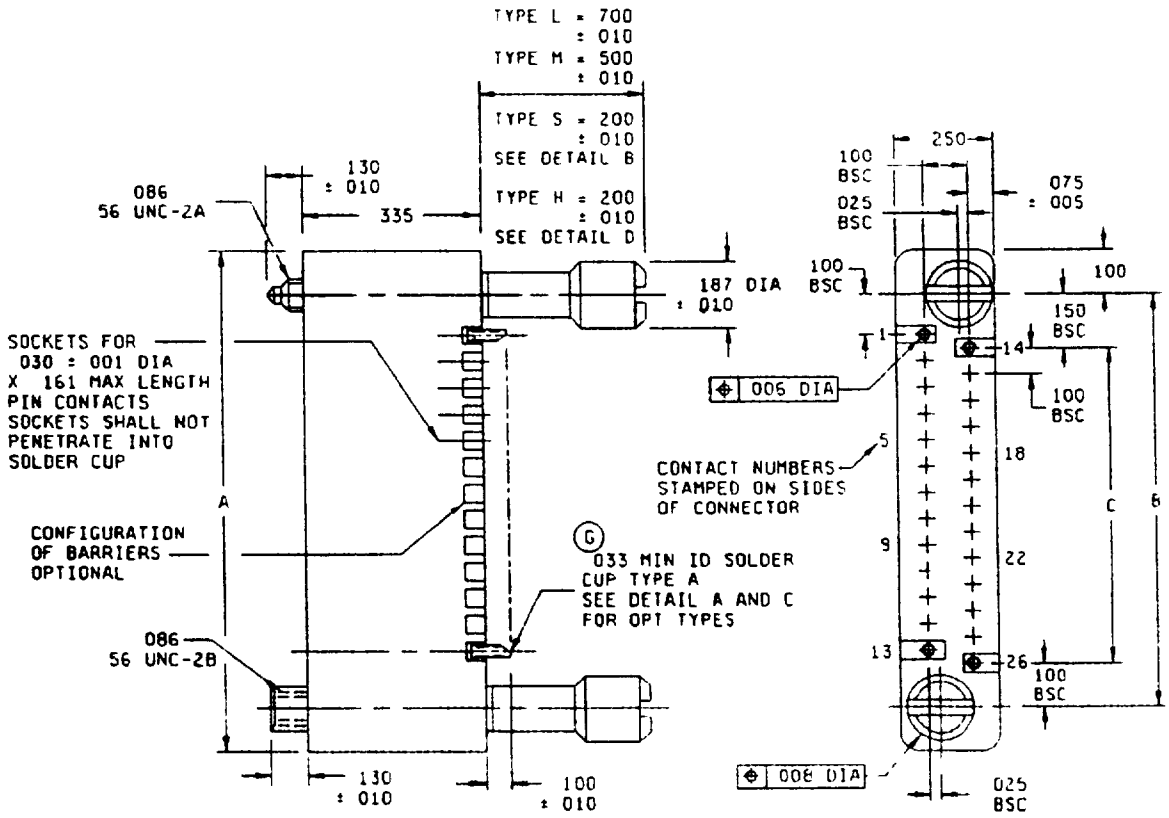


FIGURE 1 Connector, receptacle 100 (2 54 mm) spacing

G denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

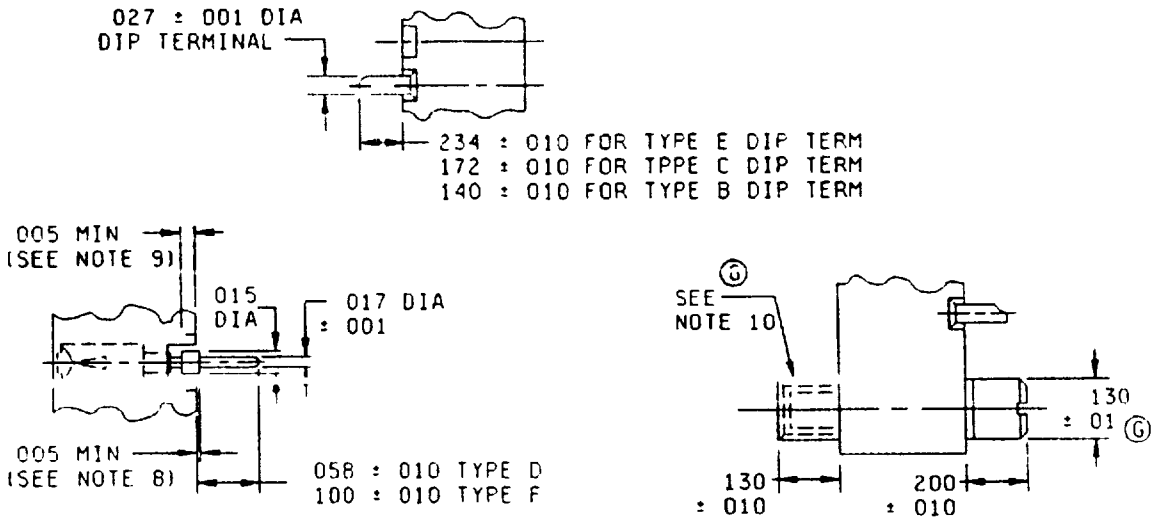

Number of contacts	Dimensions		
	A ± 010	BSC B	REF C
10	850 (21 59)	650 (16 51)	400 (10 16)
14	1 050 (26 67)	850 (21 59)	600 (15 24)
20	1 350 (34 29)	1 150 (29 21)	900 (22 86)
24	1.550 (39.37)	1.350 (34 29)	1 100 (27.94)
26	1 650 (41 91)	1 450 (36 83)	1 200 (30 48)
30	1 850 (46 99)	1 650 (41 91)	1 400 (35 56)
36	2 150 (54 61)	1 950 (49 53)	1 700 (43 18)
40	2 350 (56 69)	2 150 (54 61)	1 900 (48 26)
44	2 550 (64.77)	2 350 (59 69)	2 100 (53 34)
50	2.850 (72 39)	2 650 (67 31)	2 400 (60 96)
54	3 050 (77 47)	2 850 (72 39)	2 600 (66 04)
56	3 150 (80 01)	2 950 (74 93)	2 700 (68 58)
60	3 350 (85.09)	3 150 (80.01)	2 900 (73 66)
66	3 650 (92 71)	3 450 (87 63)	3 200 (81 28)
70	3.850 (97 79)	3 650 (92 71)	3 400 (86 36)

FIGURE 1. Connector, receptacle, 100 (2.54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
001	0 03	.051	1 30	161	4 09
005	0 13	058	1 47	172	4 37
006	0 15	075	1 91	187	4 75
.008	0 20	.078	1 98	200	5 08
010	0 25	086	2 18	234	5 94
017	0 43	.100	2 54	.250	6 35
025	0.64	.130	3 30	.335	8 51
027	0 69	.140	3 56	.500	12 71
035	0.89	150	3 81	700	17 78

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4. These connectors mate with connectors specified in MIL-C-55302/57, /61, and /63 using appropriate hardware
5. Numbers indicating the first and last position in each row and every fourth contact position in between shall be marked on the side(s) of the connector As an option to the above, numbers indicating every fourth cavity may be stamped on the side of the connector, with the exception that the number 1 contact shall be marked.
6. Termination layout on .025 (0.64 mm) modular grid
7. Metric equivalents are in parentheses
8. Conformal coating clearance shall be 005 (0 13) minimum (not required for optional design)
9. Optional design conformal coating clearance
10. (G) Hole depth to female guide hardware: 282 min (7.16 mm) Full thread depth to female threaded hardware· 240 min (6 1 mm)

FIGURE 1 Connector, receptacle .100 (2 54) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Material Jackscrews and jacksockets shall be of corrosion-resisting stainless steel in accordance with ASTM-A581 or ASTM-A582, passivated in accordance with QQ-P-35 or shall be corrosion-resistant copper nickel alloy (61 ±2% copper, 25 ±2% nickel, 2 5% max other, and the balance zinc) and shall have a brinell hardness of 145 to 175

Plating The contact plating shall be in accordance with MIL-C-55302 or gold in accordance with MIL-G-45204, type II, grade C, class 1, over nickel plating in accordance with QQ-N-290, class 2, 50 to 150 microinches in the engaging area and gold in accordance with MIL-G-45204, type II, grade C, class 00 or type III, grade A, class 00, over nickel plating in accordance with QQ-N-290, class 02, 50 to 150 microinches in the termination area

Contact identification See figure 1

Contact engagement and separation forces (No 22 contacts)

Minimum separation 0 5 ounce

Maximum engagement 12 0 ounces for standard force and 4 0 ounces for low force

Note. Low force contacts meet the requirements of standard force contacts

Mating and unmating

Standard insertion force contacts. The maximum mating force, in pounds, shall be the number of contacts multiplied by 0 56 and the withdrawal force, in pounds, shall be a minimum of 0 08 times the number of contacts and shall not exceed the measured insertion force

Low insertion force contacts. The maximum mating force, in pounds, shall be the number of contacts multiplied by 0 25 and the withdrawal force, in pounds, shall be a minimum of 0 04 times the number of contacts and shall not exceed the maximum insertion force

Contact resistance The average contact resistance of all contacts measured shall not exceed 0 010 ohm, and no individual contact pair shall have a resistance exceeding 0 020 ohm

Dielectric withstanding voltage

Sea level 1,000 volts rms

High altitude 300 volts rms

Current rating 5 0 amperes maximum per contact

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

Example of part number

M55302/62	L	A	10	L
Basic number of specification sheet	Type of contacts	Type of terminal (see figure 1)	Number of contacts (see figure 1)	Type of mounting hardware

L = Low insertion force contacts
- = Standard insertion force contacts

A = solder cup
B = dip terminal 140 long
C = dip terminal 172 long
D = .058 flexible circuit terminal
E = dip terminal 234 long
F = .100 flexible circuit terminal

L = .700 slotted turning jackscrew
M = .500 slotted turning jackscrew
S = .200 slotted turning jackscrew
H = .200 hex turning jackscrew

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities
Army - AR, MI
Navy - AS, TD
Air Force - 85, 99
DLA - ES

User activities
Army - AT, AV, ME
Navy - MC, OS
Air Force - 11, 19, 80

Preparing activity
Army - CR

Agent.
DLA - ES

(Project 5935-3860-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.