INCH-POUND
MIL-DTL-55302/82C
15 November 2004
SUPERSEDING
MIL-C-55302/82B
2 March 1989

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, 41, 66, 114 CONTACT POSITIONS: FOR PRINTED WIRING BOARDS (.100 X .050 OFFSET GRID)

MIL-DTL-55302/82C is inactive for new design after 1 July 1989.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


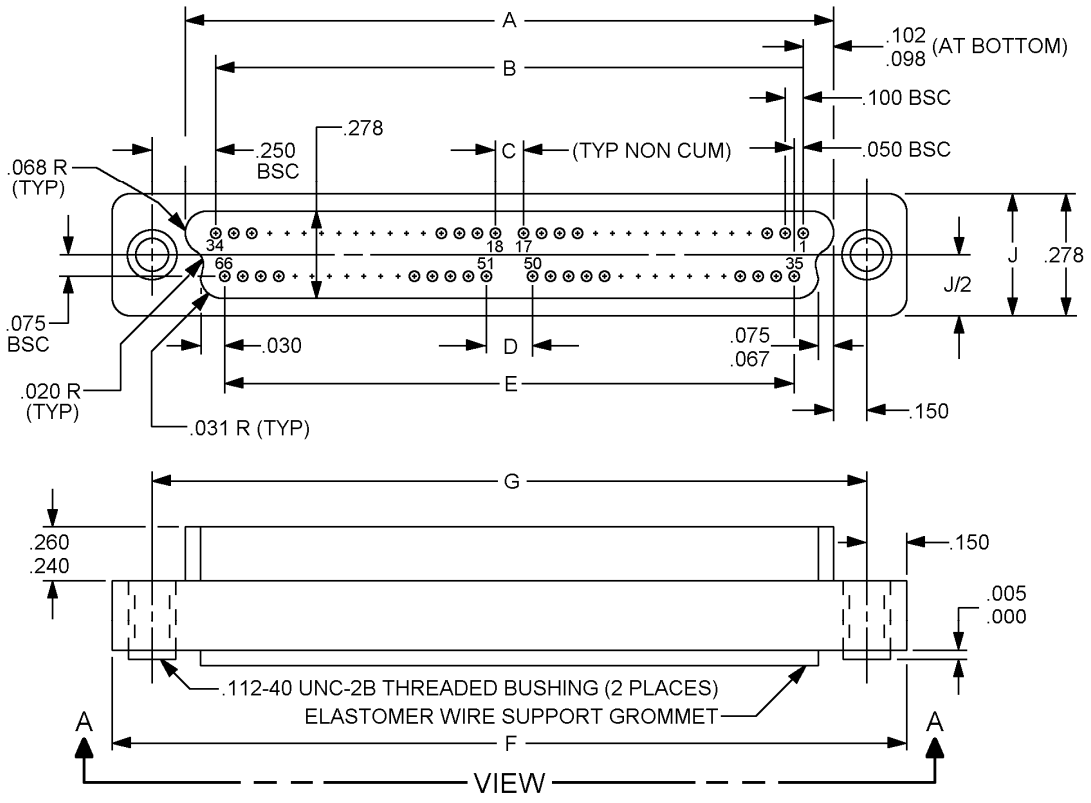


FIGURE 1. Connectors, receptacle (.100 x .050 offset grid).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

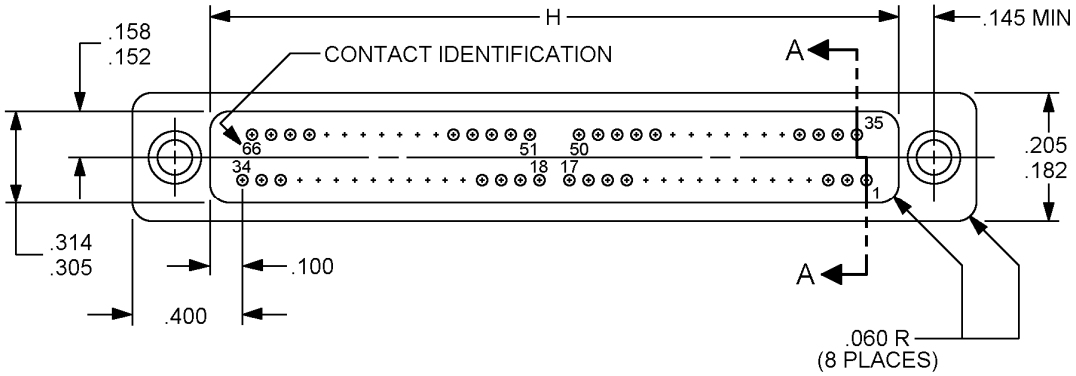

VIEW A - A

FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

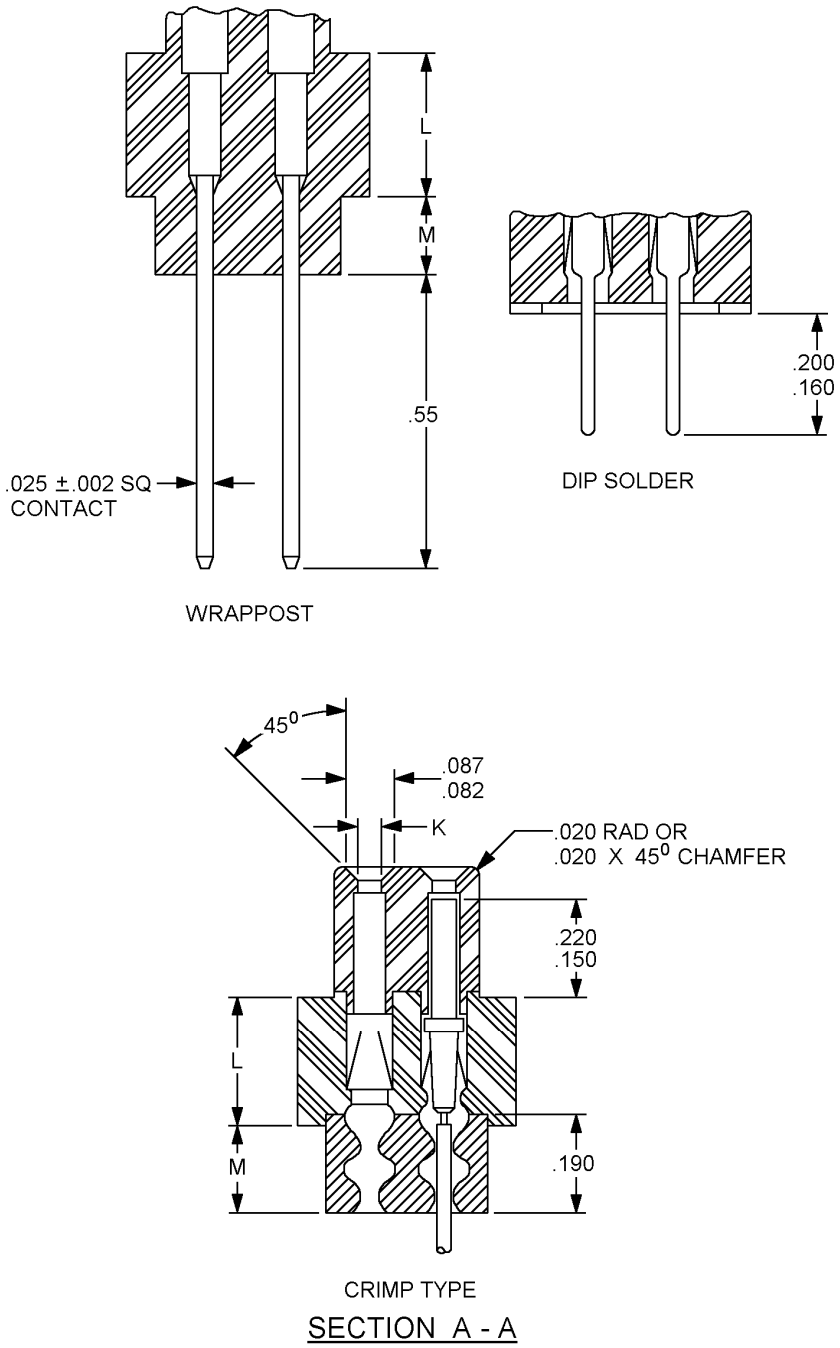


FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.51	.075	1.91	.190	4.83	.500	12.70
.005	0.13	.076	1.93	.195	4.95	.55	13.97
.007	0.18	.082	2.08	.200	5.08	1.900	48.26
.010	0.25	.087	2.21	.205	5.21	2.00	50.80
.015	0.38	.098	2.49	.210	5.33	2.200	55.88
.020	0.51	.100	2.54	.211	5.36	2.500	63.50
.025	0.64	.102	2.59	.220	5.59	2.80	71.12
.030	0.72	.112	2.84	.240	6.10	3.400	86.36
.031	0.79	.129	3.28	.250	6.35	3.500	88.90
.032	0.81	.130	3.30	.260	6.60	3.700	93.98
.041	1.04	.145	3.68	.278	7.06	4.000	101.60
.042	1.07	.148	3.76	.280	7.11	4.300	109.22
.044	1.12	.150	3.81	.300	7.62	5.900	149.86
.046	1.68	.152	3.86	.305	7.75	6.000	152.40
.050	1.27	.154	3.91	.310	7.87	6.200	157.48
.055	1.40	.158	4.01	.314	7.98	6.500	165.10
.060	1.52	.160	4.06	.400	10.16	6.800	172.72
.067	1.70	.170	4.32	.415	10.54		
.068	1.73	.182	4.62	.450	11.43		
.074	1.88						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ± .02 (0.5 mm) for two place decimals, and ±2º on angles.
4. These connectors mate with connectors in accordance with MIL-DTL-55302/83.
5. Unless otherwise specified, contacts are shipped loose in a plastic bag.

FIGURE 1. Connectors, receptacle (.100 x .050 offset grid) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number, contacts and dimensions.

Dash number	Number of contacts	Type of termination	Type of contact M55302/84	Number of contacts supplied	Dimensions											
					A	B	C	D	E	F	G	H +.005 -.010	J	K	L	M
-01	66	Crimp removable	01	0	3.700	3.500	.300	.400	3.400	4.300 ±.007	4.000	3.700	.415	.044	.250	.17
-02	66	Dip solder	03	0	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-03	66	Solder turret	04	0	"	"	"	"	"	"	"	3.700	"	"	"	.17
-04	66	Wrappost	05	0	"	"	"	"	"	"	"	"	"	"	"	.129 ±.007
-05	66	Crimp removable	02	0	"	"	"	"	"	"	"	"	"	"	"	.17
-06	66	Crimp removable	01	66	"	"	"	"	"	"	"	"	"	"	"	"
-07	66	Crimp removable	02	66	"	"	"	"	"	"	"	"	"	"	"	"
-08	66	Dip solder	03	66	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-09	66	Solder turret	04	66	"	"	"	"	"	"	"	3.700	"	"	"	.17
-10	66	Wrappost	05	66	"	"	"	"	"	"	"	3.700	"	"	"	.129 ±.007
-11	41	Crimp removable	01	0	2.200	2.000	N/A	N/A	1.900	2.800	2.500	2.200	"	"	"	.17
-12	41	Crimp removable	02	0	"	"	"	"	"	"	"	2.200	"	"	"	.17
-13	41	Dip solder	03	0	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-14	41	Crimp removable	04	0	"	"	"	"	"	"	"	2.200	"	"	"	.17
-15	41	Crimp removable	01	41	"	"	"	"	"	"	"	"	"	"	"	"
-16	41	Crimp removable	02	41	"	"	"	"	"	"	"	"	"	"	"	"
-17	41	Dip solder	03	41	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-18	41	Solder turret	04	41	"	"	"	"	"	"	"	2.200	"	"	"	.17
-19	114	Crimp removable	01	0	6.200	6.000	.400	.500	5.900	6.800	6.500	6.200	.450 +.010	.041	.280	.16
-20	114	Crimp removable	02	0	"	"	"	"	"	"	"	6.200	-005	"	"	.16
-21	114	Dip solder	03	0	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-22	114	Solder turret	04	0	"	"	"	"	"	"	"	6.200	"	"	"	.16
-23	114	Wrappost	06	0	"	"	"	"	"	"	"	"	"	"	"	"
-24	114	Crimp removable	01	114	"	"	"	"	"	"	"	"	"	"	"	"
-25	114	Crimp removable	02	114	"	"	"	"	"	"	"	"	"	"	"	"
-26	114	Dip solder	03	114	"	"	"	"	"	"	"	N/A	"	"	"	N/A
-27	114	Solder turret	04	114	"	"	"	"	"	"	"	6.200	"	"	"	.16
-28	114	Solder turret	06	114	"	"	"	"	"	"	"	6.200	"	"	"	.16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1 and table I.

Material:

Insulators: In accordance with MIL-DTL-55302.

Contact retention clips: Beryllium copper in accordance with ASTM B194.

Wire support: Elastomer in accordance with ASTM D2000.

Mounting bushings: Stainless steel in accordance with ASTM A582, series 300.

Contact identification: See figure 1 and table I.

Mating and unmating: The maximum mating force shall be the average mating force measured in five engagements and shall not exceed .5 times the number of contacts in pounds.

Contact resistance: The potential drop across a mated contact at 3.0 amperes test current shall not exceed 25 millivolts, and after corrosion test shall not exceed 30 millivolts.

Dielectric withstanding voltage:

Sea level: 1,500 V ac (rms) test.

50,000 feet altitude: 500 V ac (rms) test.

Current rating: 3.0 amperes maximum per contact. 2.25 continuous per contact per connector at room ambient.

Contact: See table I.

Keying plug: M55302/85.

Insertion and removal tool: M81969/10-01 and M81969/10-02.

Crimp tool: Hand crimp in accordance with M22520/1.

Part or Identifying Number (PIN): M55302/82-(dash number from table I).

Required testing limited to group A test only. Qualification requirements are not applicable.

Reference documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/83
ASTM A582
ASTM B194
ASTM D2000

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4440-004)

Review activities:
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.