MIL-D-48350 (PA)
Amendment 3
16 June 1975
Superseding
Amendment 2
11 February 1975

MILITARY SPECIFICATION

DISPENSER CONTROL PANEL
FOR
M56/XM58 MINES/MARKERS

This Amendment forms a part of Military Specification MIL-D-48350 (PA) dated 15 April 1974 and is approved for use by all Departments and Agencies of the Department of Defense.

Paragraph 2.1 delete,

"MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components."

Paragraph 2.1 add,

9294970 - Packing and Marking for box, Exterior for Panel, Dispenser Control: M56/XM58.

Paragraph 2.1 delete,

"INSPECTION EQUIPMENT DRAWINGS

9278652 - Solenoid Test Load"

Paragraph 2.1 delete,

"INSPECTION EQUIPMENT DRAWINGS

9278652 - Solenoid Test Load"

Paragraph 2.2, add new paragraph

"12.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

FSC: 1345

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

Code of Federal Regulations, Title 49 - Transportation, Parts 0-190.

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. Orders shall specify 49 CFR 0-190 (latest revision)).”

Paragraph 4.4.6, Test No. 3, Step C, delete the last 2 sentences and substitute:

*Paragraph 4.4.3 delete, “(28.0-4.0 v.d.c.)” and substitute, “(28.0±1.0 v.d.c)“

*Paragraph 4.4.4 delete, "(28.0-4.0 v.d.c.)" and substitute, “(28.0±1.0 v.d.c.).”

*Paragraph 4.4.5 delete, "(28.0-4.0 v.d.c.)” and substitute, "(28.0±1.0 v.d.c.)."

“Solenoid outputs shall be measured using Test Circuit No. 1 of this specification. Canister outputs shall be measured using Test Circuit No. 2 of this specification.”

*Paragraph 4.4.7 delete from Test No. 5.a - "S6FP" and substitute, "S2FP."

*Paragraph 4.4.8 delete from Test No. 5.a - "S6FP" and substitute, "S2FP."

*Paragraph 4.4.9 delete from Test No. 5a, "S6FP" and substitute, "S2FP."

Paragraph 5 delete and substitute:

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1.1 Level A - Method 1. - The dispenser control panel assembly when shipped by itself shall be preserved and packaged in accordance with dwg. 9294970 and Code of Federal Regulations CFR 49 Parts 100-199.

5.1.1.2 Level A - Method 2. - The dispenser control panel assembly when shipped as part of the dispenser control panel and

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

wiring harness assembly shall be preserved and packaged in accordance with dwg. 9287747 and Code of Federal Regulation CFR 49 Part 100-190.

5.2 Packing

5.2.1.1 Level A - Method 1. - The dispenser control panel assembly when shipped by itself shall be packed in accordance with dwg. 9294970 and Code of Federal Regulations CFR 49 parts 100-190.

5.2.1.2 Level A- Method 2. - The dispenser control panel assembly when shipped as part of the dispenser control panel and wiring harness assembly shall be packed in accordance with dwg. 9287747 and Code of Federal Regulations CFR 49 parts 100-190.

5.3 Marking

5.3.1 Method 1. - Marking of the carton shall comply with Level A of dwg. 9294970 when the dispenser control panel assembly is shipped by itself.

5.3.2 Method 2. - Marking of the carton shall comply with Level A of dwg. 9287747 when the dispenser control panel assembly is shipped as part of the dispenser control panel and wiring harness assembly.

5.4 Shipping - When components of more than one lot are shipped, each lot shall be kept separate, and the division between lots clearly Indicated to prevent mixing of the lots in transit.

*Paragraph 6.3.3 delete,

"SARPA-QA-A-M" and substitute, "SARPA-QA-T-T."

*Page 22, Curve A delete and replace with new Curve A

*Page 23, Curve B delete and replace with new Curve B


*Page 24, Curve C delete and replace with new Curve C

*Page 25, Curve D delete and replace with new Curve D

Asterisks (*) denotes changes in addition to or different from Amendment 2 dated 11 February 1975. This was done as a

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

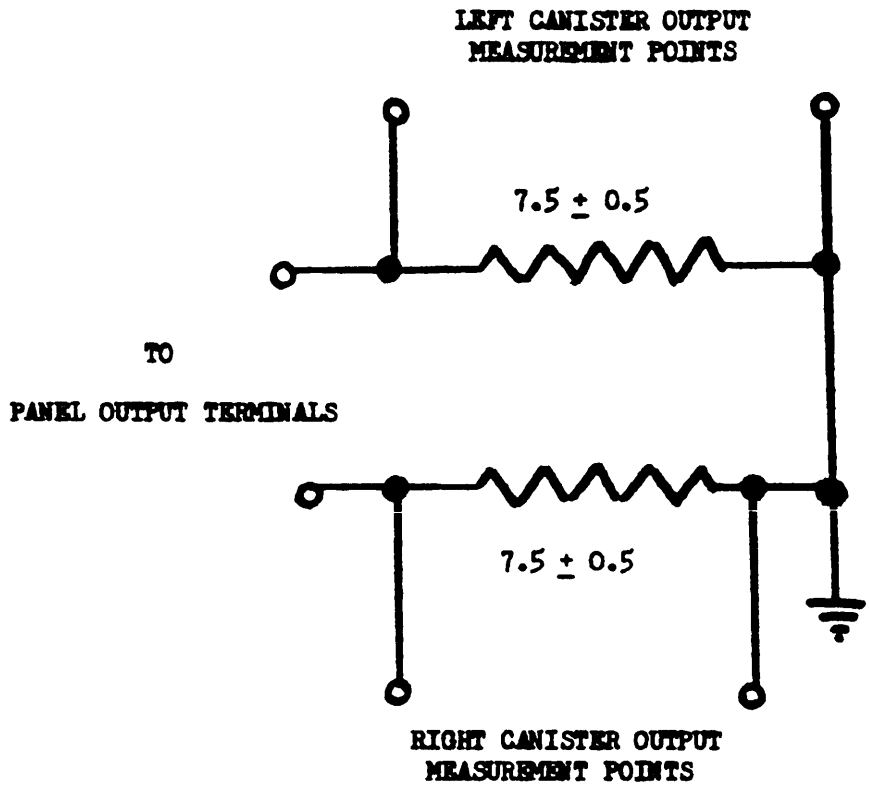


RESISTOR WATTAGE: 50 WATTS

TEST CIRCUIT NO. 1

M56/XM58 CANISTER TEST BOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

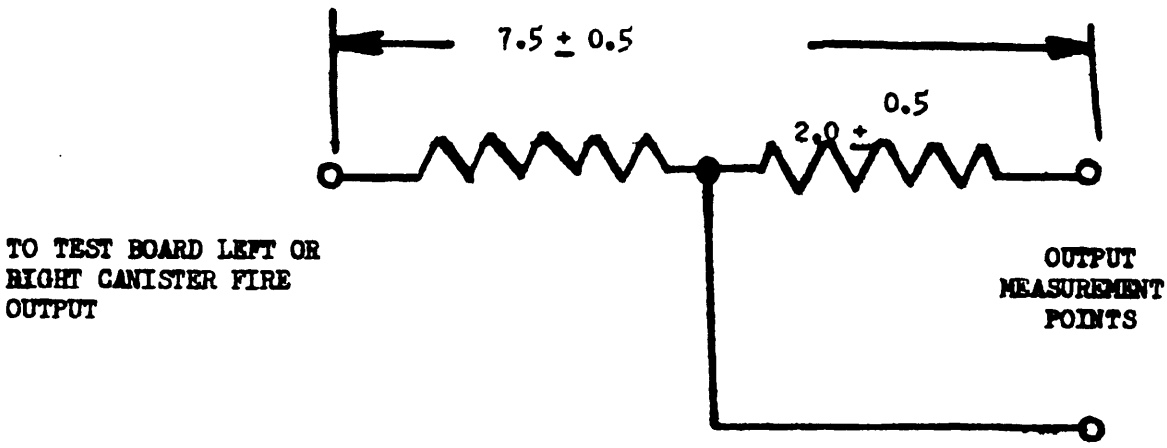


RESISTOR WATTAGE: 50 WATTS

TEST CIRCUIT NO. 2


M56/XM58 CANISTER TEST BOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

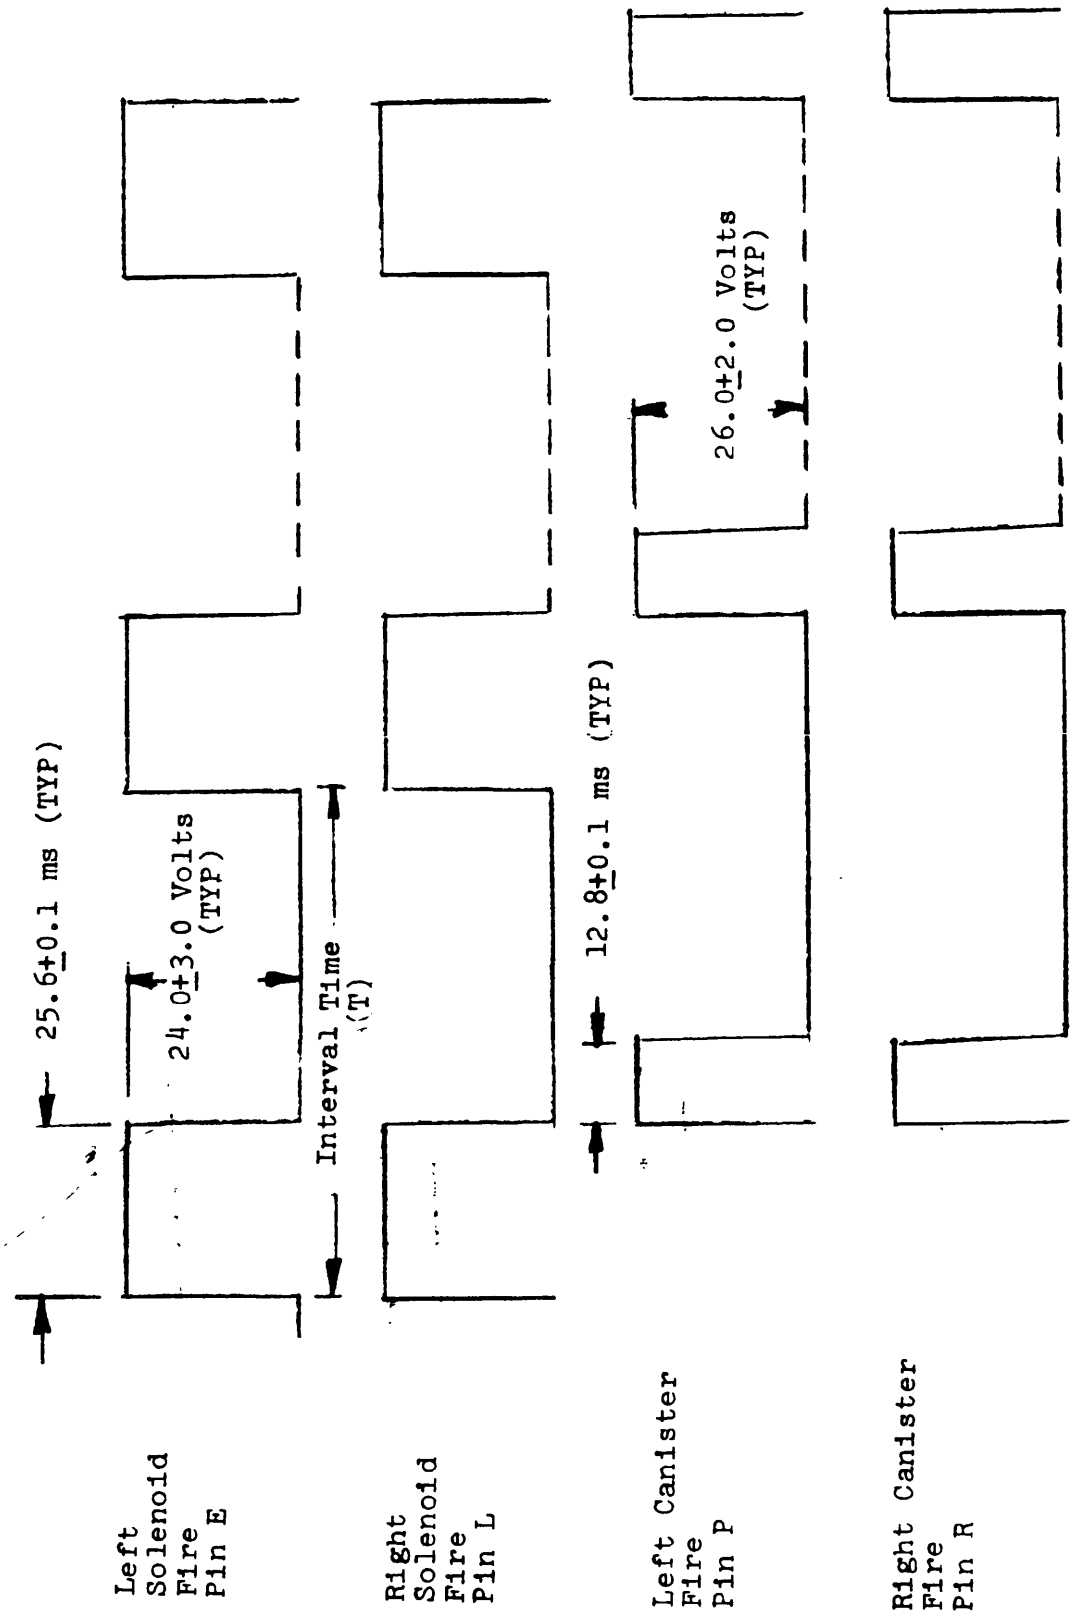

CURVE A
MINES - PAIRS


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

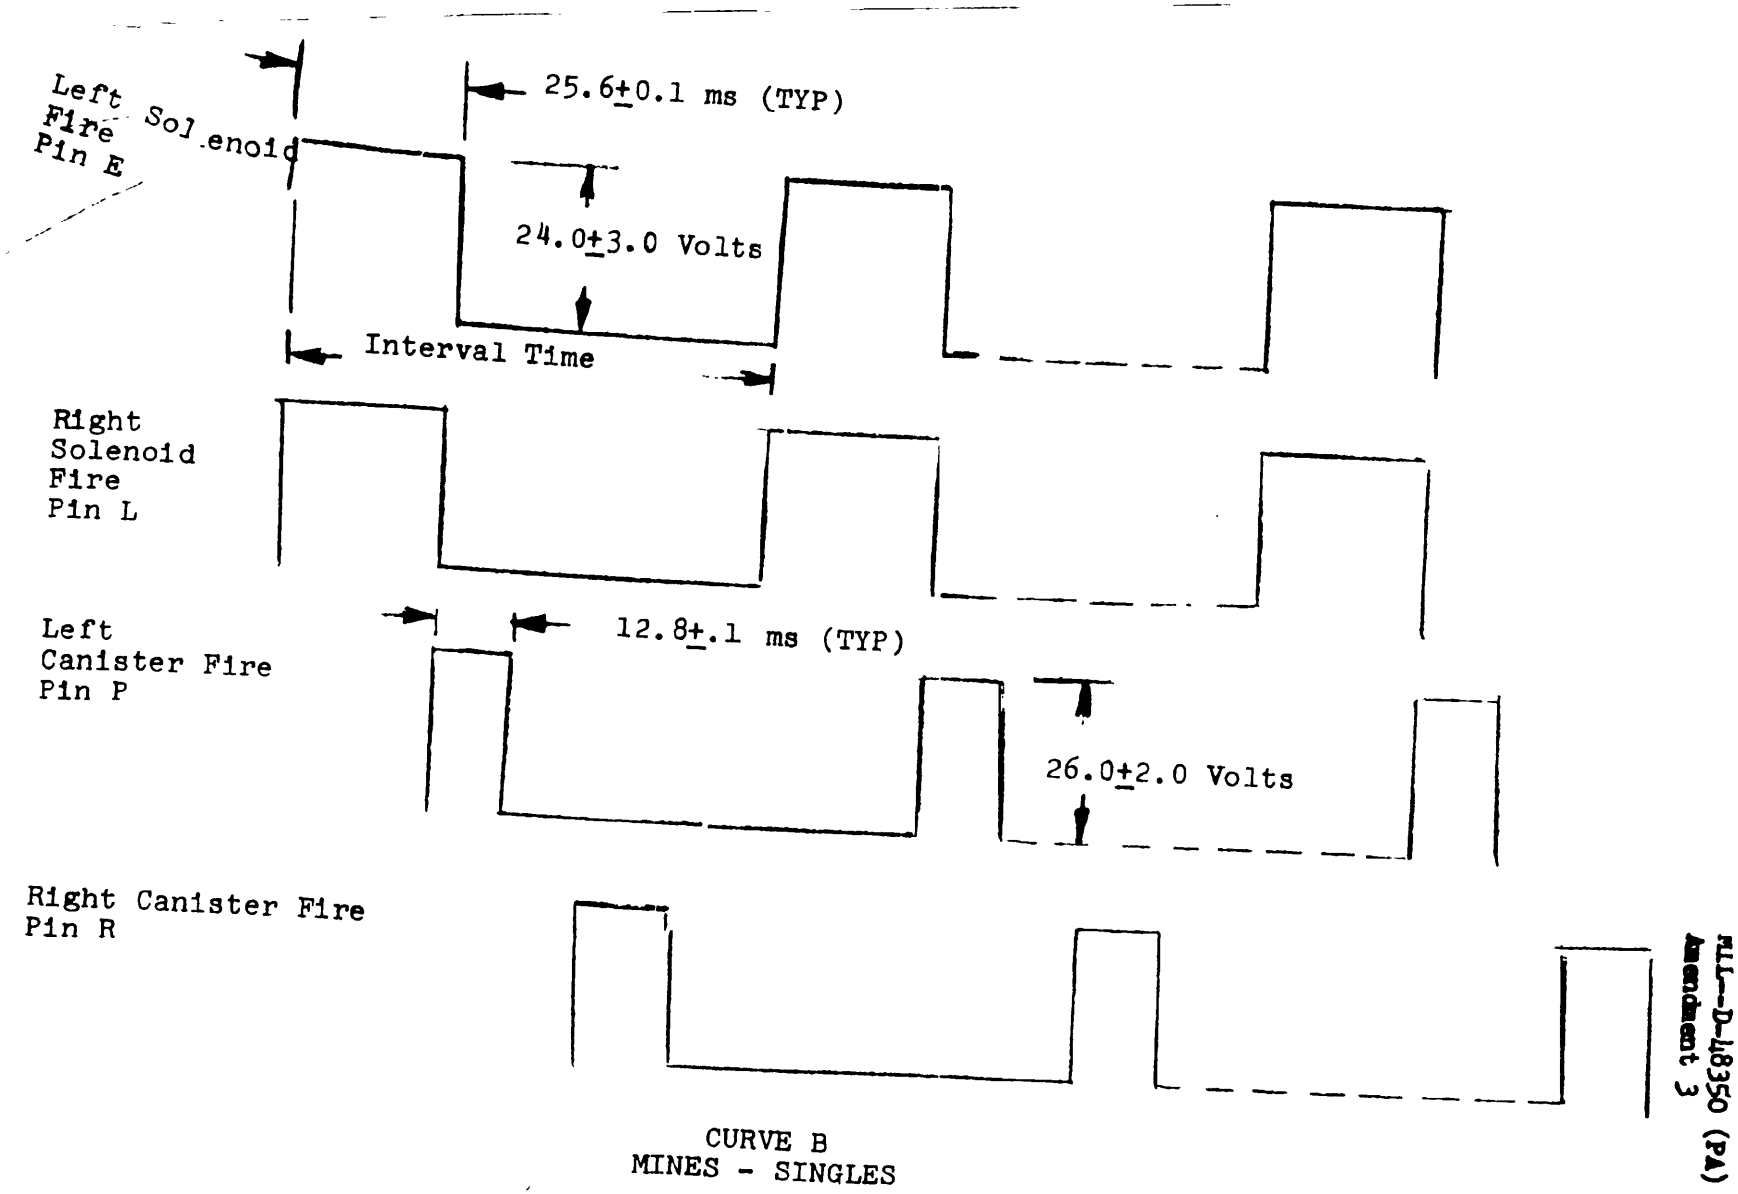


CURVE B
MINES - SINGLES

MIL-D-48350 (PA)
Amendment 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:22Z
Check the source to verify that this is the current version before use.

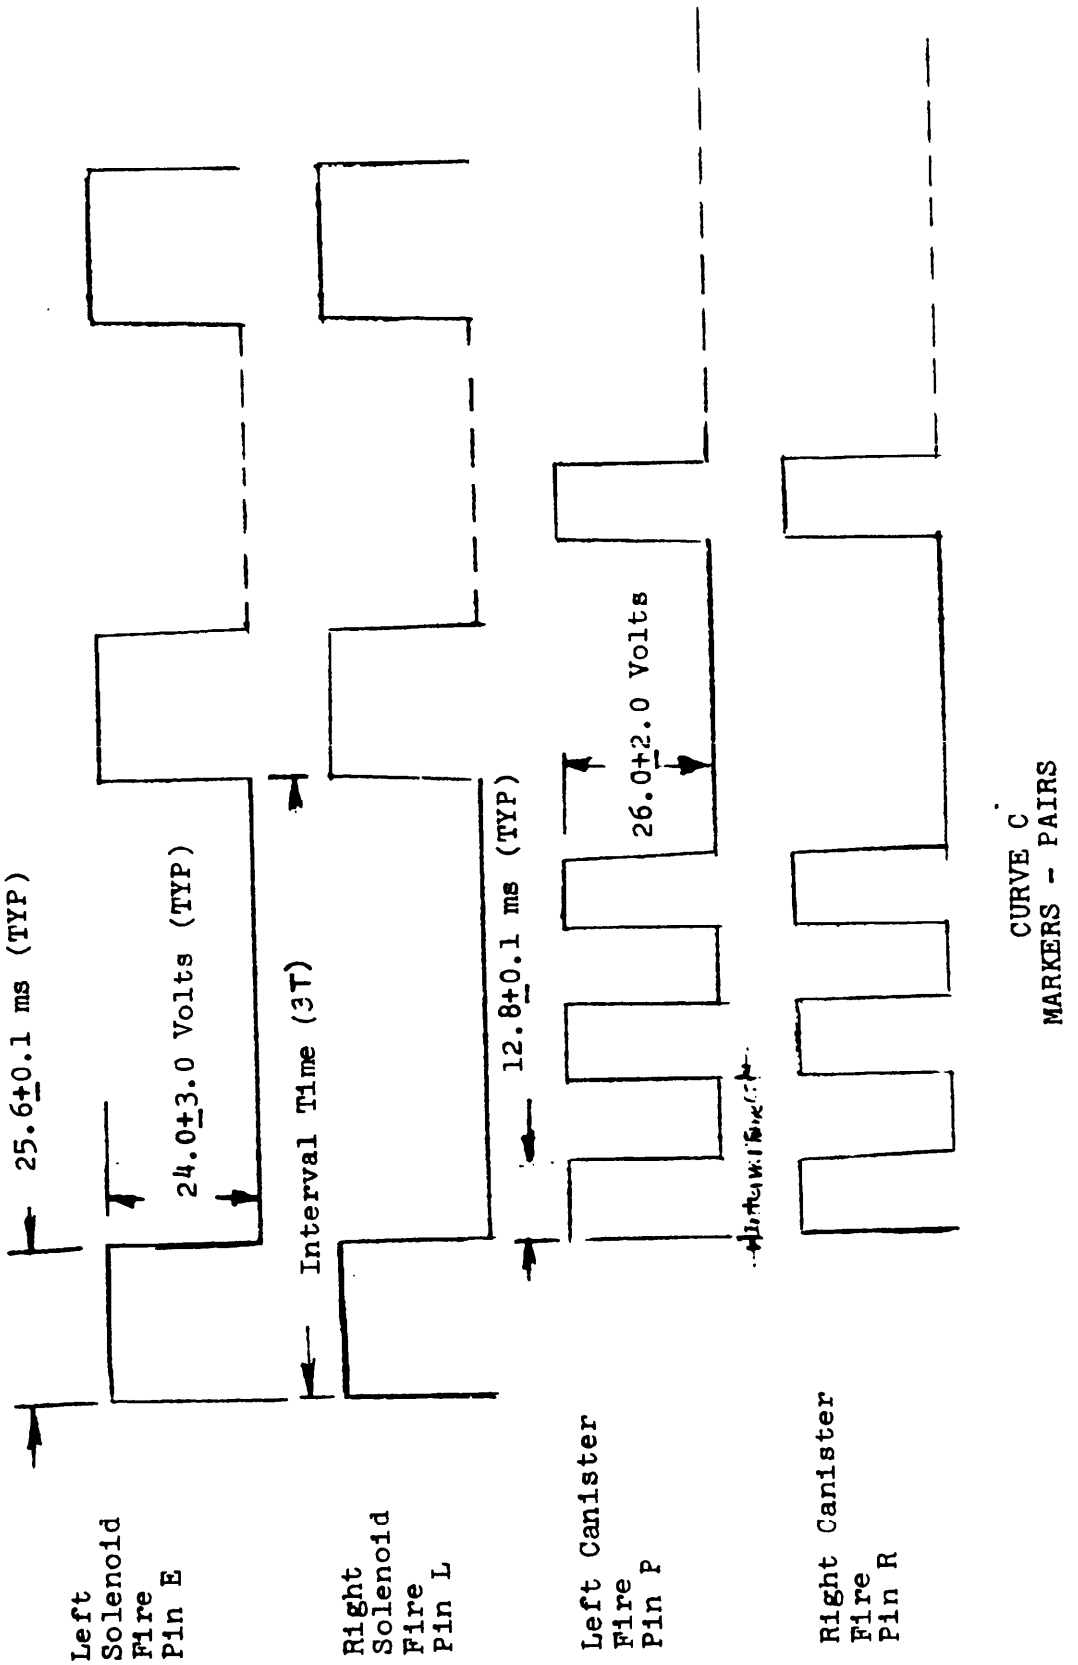

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:22Z
Check the source to verify that this is the current version before use.

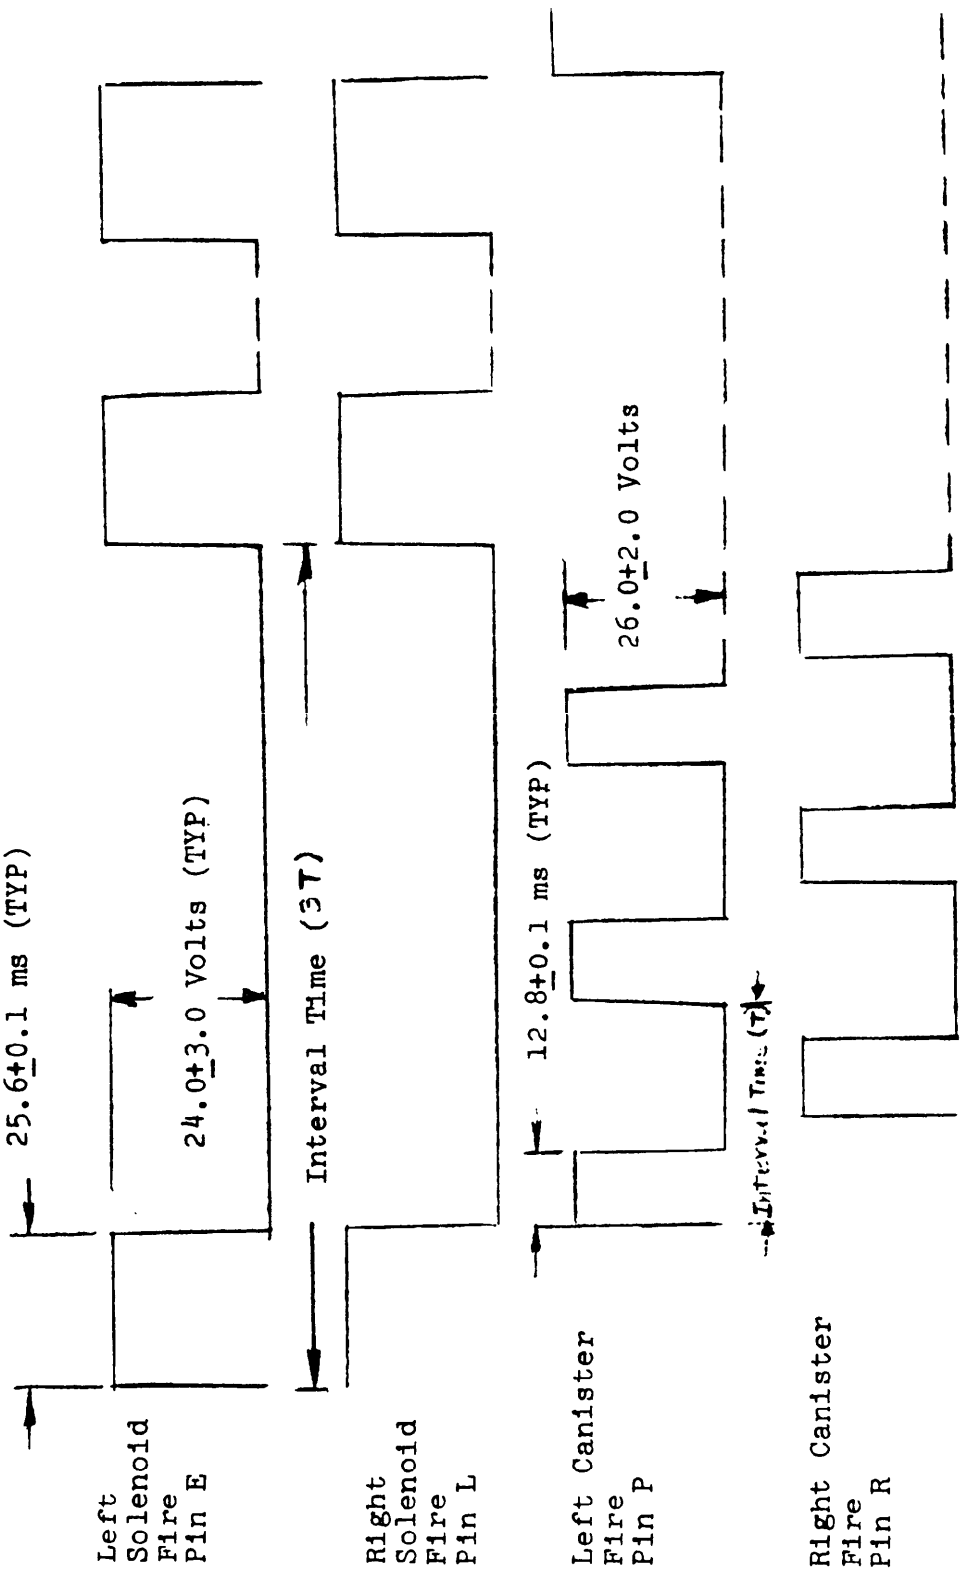

CURVE D
MARKERS - SINGLE

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:22Z
Check the source to verify that this is the current version before use.