MILITARY SPECIFICATION

MOUNT, PERISCOPE: 10513360

1. SCOPE

1.1 This specification covers a periscope mount which is provided with an electrically operated wiper blade for wiping the periscope entrance window (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel; General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Disposition and Maintenance of

STANDARDS

Military

MIL-STD-105	Sampling Procedure and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U.S. Army, Frankford Arsenal

F8565556	Pressure Tester - Two Station
F10513360	Mount, Periscope: 10513360
F10542201	Body Assembly, Tank Periscope: 10542201
F10542204	Head Assembly, Tank Periscope: 10542204

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

F11738174	Gage - Interchangeability - Body Maximum
F11738175	Gage - Interchangeability - Body Minimum
F11738176	Gage - Interchangeability - Head Minimum
F11738177	Gage - Interchangeability - Head Maximum
F11738180	Fixture - Pressure Testing - Head Maximum
F11738181	Fixture - Pressure Testing - Head Minimum
F11738182	Fixture - Pressure Testing - Body Maximum
F11738183	Fixture - Pressure Testing - Body Minimum

PACKAGING DATA SHEET

10513360	Packaging of Mount, Periscope: 10513360

(Copies of specifications, standards, drawings and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The periscope mount, hereinafter referred to as "mount" shall be manufactured in accordance with Drawing F10513360 and drawings pertaining thereto.

3.2 General specification.- The contractor shall be responsible for adherence to, and compliance with, the requirements of MIL-F-13926 specified below:

Order of precedence
a. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.3 Environmental.

3.3.1 Storage temperatures.- The mount shall show no evidence of physical failure such as casting failure, adhesive failure, deterioration of the wiper blade, or deterioration of Gasket 10513302 due to storage at temperatures ranging from -80° to +160° Fahrenheit (F). subsequent to meetng this requirement, the mount shall be capable of meeting the requirements of 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

3.3.2 Extreme operating temperatures.- The mount shall meet the applicable requirements of 3.8.1.1 through 3.8.2.2 while exposed to and thermally stabilized at temperatures of -65° and +150°F.

3.3.3 Standard temperature.- Unless otherwise specified herein, the mount shall meet the following requirements while exposed to a temperature between +60° and +90°F.

3.4 Orientation.- The requirements of 3.6, 3.7 and 3.8 shall be met with Datum Plane "A" in a horizontal plane within 2.0 degrees of arc and the shield assembly and Mount Assembly 10513500 positioned as shown on Drawing F10513360. Unless otherwise specified, the shield shall be in the raised position.

3.5 Vibration.- The mount shall show no evidence of physical failure due to being vibrated successively along 3 mutually perpendicular axes. Vibration shall be a simple harmonic motion, the frequency varying either linearly or logarithmically from 5 to 55 to 5 cycles per second in 5 minute cycles for a total of 15 minutes along each of the axes. The amplitude of vibration shall be maintained constant at 1/64 inch (1/32 inch total excursion). Following the vibration test, the mount shall meet the requirements of 3.7.3, and shall then meet all of the following requirements.

3.6 Sealing.- The mount shall be capable of meeting this requirement while exposed to prolonged rainfall with the shield in the raised position. Gasket 10513302 shall be capable of preventing water penetration below the contact surfaces when the periscope head assembly is positioned in the mount.

3.7 Periscope holding features.

3.7.1 Insertion and removal.- The mount shall permit insertion and removal of the head assembly and body assembly of the periscope without restriction. This requirement shall be met with the wiper blade raised to prevent damage to the blade.

3.7.2 Periscope mounting repeatability.- An original line of sight, through the periscope body assembly, shall not deviate more than 0.10 mil due to repeated mounting of the body assembly to the mount.

3.7.3 Rigidity (line of sight retention) .- The mount shall be capable of maintaining a previously established line of sight, through the periscope body assembly, within 0.10 mil subsequent to vibration (see 3.5).

3.8 Operability.- The requirements of 3.8.1.1 to 3.8.2.2 inclusive shall be met at the temperatures specified in 3.3.2 and 3.3.3.

3.8.1 Controls.

3.8.1.1 Periscope locking lever.- Lever Assembly 8589900, shown on Drawing F10513500, shall be manually operable through the range required to secure and permit removal of the periscope body assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

3.8.1.2 Shield actuating handle.- Handle 10542148 shall be manually operable through the range required to raise and lower the shield to the fully open to the fully closed position.

3.8.1.3 Handle locking latch.- When Latch 10542138 is released while the shield is being raised, the handle shall lock the shield in the fully open position. when the latch is released while the shield is being lowered, the handle shall lock the shield in the fully closed position,

3.8.2 Wiper mechanism.- Pins "A" and "B", specified in the following requirements, are shown on Electrical Schematic Drawing C8589781.

3.8.2.1 Motor.- With 24 volts dc (vdc) applied to Pins "A" and "B", the wiper motor shall be capable of drawing the wiper blade across the entrance window of the periscope head assembly in a constant reciprocating motion while the window is frost free and dry. This requirement shall also be met with 24 vdc applied to Pin "A" and 16 vdc applied to Pin "B".

3.8.2.2 Limit switch.- Subsequent to meeting the requirement of 3.8.2.1, remove the 16 vdc from Pin "B" while the 24 vdc is applied to Pin "A". The wiper blade shall continue to operate until the blade returns to and stops at the "O" position as shown on Drawing F10513360.

3.8.2.3 circuit breaker.- With Shaft Assembly 10549773 secured to prevent rotation and the 24 vdc applied to Pins "A" and "B", the motor shall be de-activated by the circuit breaker within 15 seconds, maximum. On release of the shaft, the motor must again drive the wiper. This requirement shall also be met with 24 vdc applied to Pin "A" and 16 vdc applied to Pin 'tB".

3.9 Circuitry.- The circuitry of the mount shall be in accordance with the applicable electrical schematic drawings.

3.10 Interchangeability.

3.10.1 Interchangeability - mechanical.- The mount shall be capable of accepting Head Assemblies 10542204 and 10558203 and Body Assemblies 10542201 and 11731101.

3.10.2 Interchangeability - pressure retention.- With the head and body assemblies mated to the mount, the mount shall withstand an internal pressure o.f 5 ± 0.10 pounds per square-inch gage. (psig) for a minimum of 2 hours without loss of pressure in excess of 0.2 pounds (psig).

4. QUAITY ASSURANCE PROVISIONS

4.1 Responsibilty for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except-as otherwise specified, the supplier may utilize his own facilities or any

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 mounts plus 3 each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of product" provisions of MIL-STD-l05.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAPs, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply. Examination, and tests related to Section 3 herein shall be performed on

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:14Z
Check the source to verify that this is the current version before use.

a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables I, II and III herein. Examination and tests for packaging, packing, and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables I, II and III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I - CLASSIFICATION OF DEFECTS

CLASS	REQUIREMENT	TEST PROCEDURE
CRITICAL: NONE		
MAJOR: AQL .65% Defective		
101. Rigidity, pre-vibration	3.7.3	4:6.3
102. Vibration	3.5	4.6.4
103. Rigidity, post-vibration	3.7.3	4.6.5
104. Mounting repeatability	3.7.2	4.6.6
105. Insertion and removal	3.7.1	4.6.8
106. Periscope locking lever - operability	3.8.1.1	4.-6.9.1
107. Shield actuating handle - operability	3.8.1.2	4.6.9.2
108. Handle locking latch - operability	3.8.1.3	4.6.9.3
109. Motor, wiper mechanism	3.8.2.1	4.6.9.4
110. Limit switch, wiper mechanism	3.8.2.2	4.6.9.5
111. Circuit breaker, wiper mechanism	3.8.2.3	4.6.9.6 -
112. Circuitry	3.9	4.6.10
113. Interchangeability - mechanical	3.10.1	4.6.11.1
MINOR: NONE DEFINED		

NOTE: The tests in Table I shall be conducted at a temperature between +60° and +90°F.

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units" and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1- General.-One mount shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

TABLE II

CONTROL TEST		REQUIREMENT	TEST PROCEDURE
301.	Fabrication	3.1	Applicable Drawings - Visual
302.	General specifications	3.2	MIL-F-13926 - Visual

4.4.2 Environmental.- Three mounts shall be selected at random as samples from each 50 produced, or from each month's production, Whichever occurs first. Each sample shall meet the requirements and tests in Table III and shall then meet the requirements and tests in Table I.

TABLE III

CONTROL TEST		REQUIREMENTS	TEST PROCEDURE
303.	Storage temperature (-80° and +160°F)	3.3.1	4.6.1
304.	Periscope locking lever	3.3.2, 3.8.1.1	4.6.2, 4.6.9.1
305,	Shield actuating handle	3.3.2, 3.8.1.2	4.6.2, 4.6.9.2
306.	Handle locking latch	3.3.2, 3.8.1.3	4.6.2, 4.6.9.3
307.	Motor, wiper mechanism	3.3.2, 3.8.2.1	4.6.2, 4.6.9.4
308.	Limit switch, wiper mechanism	3.3.2, 3.8.2.2	4.6.2, 4.6.9.5
309.	Sealing	3.6	4.6.7
310.	Interchangeability - pressure retention	3.10.2	4.6.11.2

NOTE: The tests for Characteristics 304 through 308 inclusive shall be conducted at -65°F and +150°F. The test for Characteristics 309 and 310 shall be conducted at a temperature between +60° and +90°F.

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the technical data package (TDP).

4.5.2.2 contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Inspection equipment design requirements.

4.5.2.3.1 Sealing.- The special testing equipment for this test shall consist of a holding device and a head assembly device. The holding device shall contain a mounting surface that simulates the vehicle turret roof (see Drawing F10513360 for turret roof thickness), and shall permit mounting and orienting the mount as specified in 3.4. The head assembly device shall conform to the external configuration of the Head Assembly F1054220 4, and contain the necessary keyways, dimensions, and mounting features of the head assembly.

4.5.2.3.2 Rigidity (line of sight retention) pre-vibration and post-vibration, and Periscope mounting repeatability.- The special testing equipment for these tests shall consist of the following main assemblies:

Mounting plate assembly
a. Line of sight test stand assembly
c. Body assembly device
d. Vibration test stand assembly
e. Vibration machine

4.5.2.3.2.1 Mounting plate assembly.- The mounting plate assembly shall- simulate the vehicle-turret roof (see Drawing F10513360 for turret roof thickness),. and shall permit mounting and orienting the periscope mount as specified in 3.4. Features shall be designed into the mounting plate assembly that will assure positive and accurate positioning and repositioning (repeated removal and replacement) of the mounting plate assembly on the line of sight test stand assembly within 5 seconds in all planes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

4.5.2.3.2.2 Line of sight test stand assembly.- The assembly shall function as a holder for the mounting plate assembly with the periscope mount in its normal operating position (see 3.4). Features shall be designed into the line of sight test stand assembly that will assure positive and accurate positioning and re-positioning (repeated removal and replacement) of the mounting plate assembly on the test stand assembly within 5 seconds in all planes. An angle reading telescope, as shown in Figure 1, shall also be part of the test stand assembly. The angle reading telescope shall have an entrance pupil of at least 2.0 inches, and the capability of reading line of sight deviations in the "X" and "Y" coordinates in seconds of arc. The positioning of the telescope on the test stand assembly shall be such that its optical axis is parallel within 5 seconds to Datum Plane "A" of the Mount Assembly 10513500 when the periscope mount, assembled to the mounting plate, is positioned on the test stand in accordance with 3.4. The optical axis of the telescope shall also be perpendicular to the mirror surface of the body assembly device (see 4.5.2.3.2.3) within 5 seconds, when the body assembly device is assembled to the periscope mount.

4.5.2.3.2.3 Body assembly device.- The body assembly device shall have the required keys, datum planes, external dimensions, and weight (45 pounds) of the Body Assembly Drawing F10542201. A mirror surface finish shall be incorporated on the device for utilization in the line of sight retention measurements of the mount by means of auto-collimation.

4.5.2.3.2.4 Vibration test stand assembly.- The vibration test stand assembly shall function as a holder for the mounting plate assembly with the mount (with body assembly device installed) maintained in its normal operating position. Features shall be designed into the vibration test stand assembly that will assure positive and secure mounting of the mounting plate assembly on the vibration test stand. The vibration test stand shall be firmly and securely mounted on a vibration machine.

4.5.2.3.2.5 Vibrating machine.- The vibrating machine shall be capable of providing the amplitude and frequency specified in 3.5. The vibrating machine shall also be capable of vibrating the mount along 3 mutually perpendicular axes while the mount is maintained in the position specified in 3.4.

4.5.2.3.3 Insertion and removal, operability of controls and wiper mechanism operation.- The special testing equipment for these tests shall consist of a holding device, head assembly device, and a body assembly device. The holding device and head assembly device shall conform to the requirements specified in 4.5.2.3.1, except that the head assembly device utilized for the wiper mechanism tests shall contain an entrance window conforming to the dimensional, and appropriate optical requirements of C10513207. The body assembly device shall conform to the requirements specified in 4.5.2.3.2.3, except that the mirror surface finish is not required. A power supply for energizing the wiper motor shall be part of the testing equipment. The power supply shall be capable of supplying and maintaining the voltages required in 3.8.2.1 through 3.8.2.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

inclusive. The power supply shall be capable of being positioned external to the temperature cycling chambers while energizing the circuitry of the mount under test.

4.5.2.3.4 Set-up and calibration.- Rigidity, stability, ease of maintenance, and adaptability of set-up and calibration equipment with complete provisions are also prime requirements. All set-up and calibration equipment necessary for certification of the testing equipment accuracy shall be furnished and will become a part of the testing equipment.

4.6 Test methods and procedures.

4.6.1 Storage temperatures.- Testing equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.3.1. The mount assembly shall be exposed to each specified temperature extreme for a minimum of 5 hours. Subsequent to the-temperature exposures, the mount assembly shall be stabilized in an ambient temperature between +60° and +90°F and subjected to the audible, tactile, and visual examination of 4.6.4.1. The mount shall show no evidence of physical failure as specified in 3.3.1. The mount shall then be subjected to the tests specified in 4.6.3 through 4.6.10 inclusive to determine overall compliance with 3.3.1.

4.6.2 Extreme operating temperatures.- Testing equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926 and the conditions of 3.3.2. The mount assembly shall be exposed to each temperature extreme specified in 3.3.2 for a minimum of 5 hours. At the end of each 5 hour period, and while still at the temperature extreme, the mount assembly shall be subjected to the tests specified in 4.6.4.1 through 4.6.9.5 inclusive. The mount assembly shall conform to the operability requirements of 3.3.2 for each temperature extreme.

4.6.3 Rigidity, pre-vibration.- Prior to the vibration test, position the mount as specified in 3.4 utilizing testing equipment conforming to 4.5.2.3.2.1 and 4.5.2.3.2.2. Install the body assembly device (4.5.2.3.2.3) in the mount. View through the telescope and establish coincidence of the real and reflected images of the telescope reticle lines. Record the readings of the telescope micrometer knobs for use in the post-vibration test. Subsequent to recording the pre-vibration line of sight setting of the telescope, remove the mounting plate assembly (with the body assembly device installed) from the line of sight test stand, and position it on the vibration test stand (4.5.2.3.2.4). Subject the mount to the test in 4.6.4. Caution must be exercised during this transfer of the mounting plate assembly. All unnecessary shocks which would tend to render the testing equipment inaccurate for subsequent tests shall be avoided,

4.6.4 vibration.- Perform this test with the mounting plate assembly and mount with body assembly device installed, positioned on testing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

equipment that conforms to 4.5.2.3.2.5. The mount shall be vibrated in accordance with Procedure IX, Part 1 of MIL-STD-810 except that the frequency, frequency cycling and amplitude of vibration shall be as specified in 3.5. Immediately following the vibration cycle, and prior to the examination for evidence of physical failure, the mount shall be subjected to the test in 4.6.5. caution shall again be exercised during transfer of the mounting plate assembly with the mount to the line of sight test stand. upon completion of the test in 4.6.5, the mount shall be subjected to the tests specified in 4.6.4.1.

4.6.4.1 Examination.- Subsequent to the test in 4.6.5, the mount shall be thoroughly examined for any evidence of physical failure. A visual and tactile examination shall be made for missing or damaged parts. A tactile examination shall also be conducted to determine looseness or improper functioning of moving parts. An audible examination shall be made of the mount by shaking it and listening for loose parts or broken components. Any one of the possible defects defined above shall be cause to consider an assembly defective. The mount shall be subjected to the tests in 4.6.6 through 4.6.10 inclusive to determine overall compliance with 3.5.

4.6.5 Rigidity, post-vibration.- Conduct this test subsequent to vibration, and prior to the examination for physical failure resulting from vibration. Position the mounting plate assembly with the mount on the line of sight test stand as in 4.6.3. View through the telescope and observe for coincidence of the real and reflected images of the telescope reticle lines. Any lack of coincidence between real and reflected images shall not exceed the tolerance specified in 3.7.3, as measured with the angle reading telescope. For this test, the angle reading telescope micrometer knobs setting established in 4.6.3 shall be used as the zero line of sight setting (coincidence of real and reflected images).

4.6.6 Mounting repeatability.- Position the mount on the testing equipment as specified in 4.6.3. Install the body assembly device in the mount. View through the telescope and establish coincidence of the real and reflected images of the telescope reticle lines, if necessary. Record the readings of the telescope micrometer knobs. Remove the body assembly device from the mount, then re-assemble the body assembly device to the mount, a minimum of 3 times. Coincidence of the real and reflected images shall be verified after each re-assembly of the body assembly device to the mount. Any lack of coincidence of the real and reflected images resulting from this removal and re-assembling of the body assembly device to the mount shall be measured and recorded. The mount shall conform to the requirements of 3.7.2, as determined by the recorded values obtained at each re-assembly of the body assembly device to the mount.

CAUTION The wiper blade shall be raised during this test to avoid damage to the blade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

4.6.7 Sealing.- The special testing equipment conforming to 4.5.2.3.1 shall be utilized in this test. During this test, the mount shall be positioned as specified in 3.4. Insert the head assembly device into the mount and mask the interior cavity of the Mount Assembly 10513500 to prevent water penetration (vertical splash) into the area of the mount below the Gssket 10513302 during the rain test. All electrical or mechanical connections not utilized and which are normally protected in service, shall also be adequately sealed against moisture penetration. The mount shall then be subjected to the rain test in accordance with Procedure I of MIL-F-13926, except that when the direction of the rainfall is varied to 45 degrees from the vertical, it shall be aimed so as to strike the head assembly device. Immediately following the specified exposure, the external surfaces of the mount and head assembly device shall be dried by compressed air or blotting with water absorbing material. Remove the mask from the interior cavity of the mount assembly and observe for any water penetration. Remove the head assembly device and visually inspect the device and interior surfaces of the mount assembly, below the Gasket 10513302, for evidence of water penetration. The mount assembly shall conform to the requirements of 3.6.

4.6.8 Insertion and removal.- The special testing equipment conforming to 4.5.2.3.3 shall be utilized for this test. Position the mount on the holding device. Repeated installation of the head and body devices into the mount shall be accomplished a minimum of 3 times. Observe for any evidence of binding or interference at each installation and removal of the head and body device. The mount-shall conform to the requirements of 3.7.1.

CAUTION: The wiper blade shall be raised during this test to avoid damage to the blade.

4.6.9 Operability.- The special testing equipment conforming to 4.5.2.3.3 shall be utilized for the following tests.

4.6.9.1 Periscope, locking lever.- Install the body assembly device in the mount, then remove the body device. Perform this test a minimum of 3 times. The Locking Lever 8589900 shall conform to the requirements of 3.8.1.1, at the temperatures indicated in 3.8.

4.6.9.2 Shield actuating handle.- Manually operate the Handle 10542148 through its full range of travel. During this excursion, the handle and shield shall conform to the requirements specified in 3.8.1.2, at the temperatures indicated in 3.8.

4.6.9.3 Handle locking latch.- Perform this test concurrently with the test in 4.6.9.2. The handle locking latch shall conform to the requirements of 3.8.1.3, at the temperatures indicated in 3.8.

4.6.9.4 Motor, wiper mechanism.- Install the head assembly device into the mount. Energize the wiper motor with 24 volts dc (Vdc) applied to Pins “A” and “B” for a period of 1 minute. During this 1 minute

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

period, the wiper motor and wiper blade shall conform to the requirements specified in 3.8.2.1 at the temperatures indicated in 3.8. Again energize the wiper motor with 24 Vdc applied to Pin "A" and 16 Vdc applied to Pin "B" for a period of 1 minute. During this 1 minute period, the wiper motor and wiper blade shall again conform to the requirements specified in 3.8.2.1 at the temperatures indicated in 3.8. During the tests at the low temperature extreme, an appropriate commercial anti-freeze solution may be used in spray form to keep the entrance window of the head assembly device frost free.

4.6.9.5 Limit switch, wiper mechanism.- Perform this test in sequence to the test in 4.6.9.4, and while the wiper mechanism is energized with 24 vdc applied to Pin "A" and 16 Vdc is applied to Pin "B" During a reciprocating cycle of the wiper blade, immediately following the blade's departure from the "O" position and prior to its reaching the extreme travel position, quickly remove the 16 Vdc application to Pin "B". The wiper blade shall conform to the requirements of 3.8.2.2 at the temperatures indicated in 3.8. Re-apply the 16 Vdc to Pin "B". Again during a reciprocating cycle of the wiper blade, when the blade is at its extreme position opposite the "O" position, quickly remove the 16 Vdc application to Pin "B". The wiper blade shall again conform to the requirements of 3.8.2.2, at the temperatures indicated in 3.8.

4.6.9.6 Circuit breaker.- Perform this test in sequence to the test in 4.6.9.5. To position the Shaft Assembly 10549773 to secure it against rotation, energize the wiper motor with intermittent on-off applications of 24 Vdc to Pins "A" and "B" until Arm 10542144 is not in contact with the limit switch plunger. Secure the Arm 10542144 at a point between the "O" and extreme travel position so as to prevent any further travel of the arm. Energize the wiper motor with 24 Vdc applied to Pins "A" and "B" and time the function of the motor with a calibrated stop watch. The wiper motor shall de-activate within the time frame specified in 3.8.2.3. Remove the voltage from Pins "A" and "B", then release the Arm 10542144 for travel. Re-apply the 24 Vdc to Pins "A" and "B". The wiper motor and blade shall function as specified in 3.8.2.3. Again secure the Arm 10542144 at a point between the "O" and extreme travel position as specified above. Repeat the above test on the circuit-breaker and motor with 24 Vdc applied to Pin "A" and 16 Vdc applied to Pin "B". The circuit-breaker and wiper motor shall again conform to 3.8.2.3. At the completion of this test, release the Arm 10542144 for travel.

4.6.10 Circuitry.- A continuity check of the mount's circuits shall be made using standard reassuring equipment to determine conformance with the requirements of 3.9.

4.6.11 Interchangeability.

4.6.11.1 Interchangeability - mechanical.- This test shall be performed utilizing the maximum and minimum interchangeability gages conform-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

ing to Drawings F11738174, F11738175, F11738176 and F11738177 (see 2.1). Each interchangeability gage shall be capable of being firmly secured and subsequently removed from the mount assembly.

4.6.11.2 Interchangeability - pressure retention.- This test shall be performed utilizing pressure test fixtures conforming to Drawings F11738180, F11738181, F11738182 and F11738183 (see 2.1), together with special testing equipment to perform the sealing test. The special testing equipment to test the sealing of the mount when a head and body are assembled to it shall conform to the internal pressure test requirements of Sheet 1 of Drawing F8565556, Pressure Tester - Two Station, except that the regulator shall conform to the requirements for use of dry air. Assemble the Mount Assembly 10513360 to the Pressure Fixtures 11738181 and 11738183. Secure the poppet valve in the head fixture in a closed position and pressurize the assemblies through the valve in the body fixture with clean dry air to the value specified in 3.10.2. Retain the applied pressure in the assemblies for a minimum of 2 hours. At the end of the 2 hour period, there shall be no evidence of leakage, as indicated on the pressure gauge of the testing equipment. Upon completion of test, open the poppet valve. Repeat the above with Mount 10513360 assembled to Pressure Fixtures 11738180 and 11738182. The mount shall conform to the requirements of 3.10.2.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing and marking shall be in accordance with Packaging Data Sheet 10513360. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The Periscope Mount 10513360 is primarily intended to support the Tank Periscope XM44, XM44E1 and XM44E2 in the Sheridan Vehicle M551.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification
b. Selection of applicable levels of preservation, packaging and packing
c. Applicable stock number
d. Applicable packaging data sheet number (see 5.1)
e. Provisions for First Article testing

Custodian:


Army - MU

Preparing activity:

Army- MU

Project No. 1240-A210

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

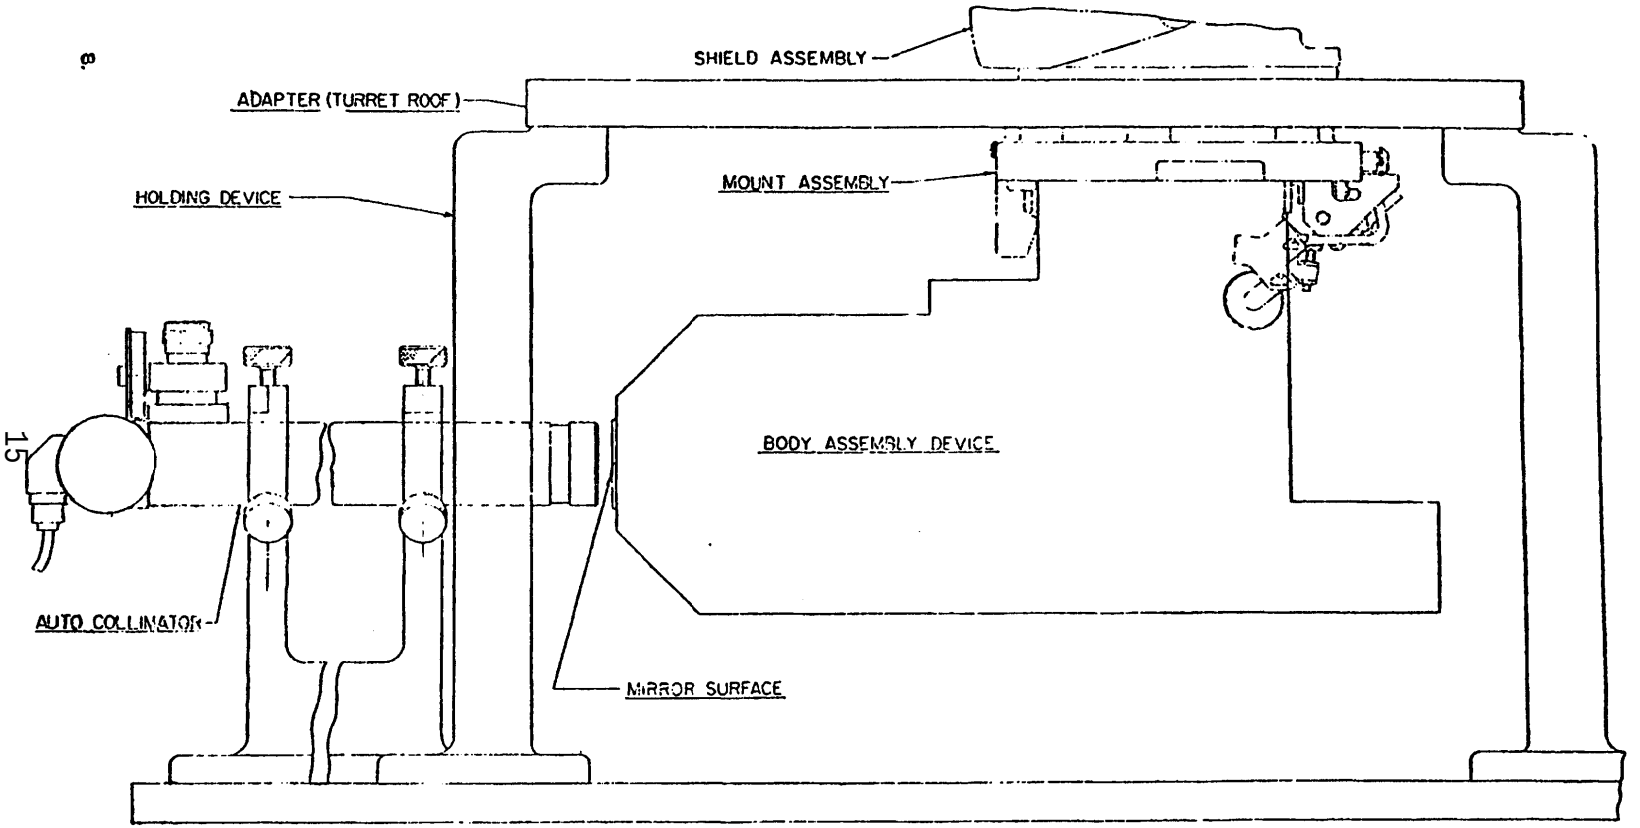

RIGIDITY AND REPEATABILITY ACCURACY TEST FIXTURE
FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.