MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, (GAGE), TYPE II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.








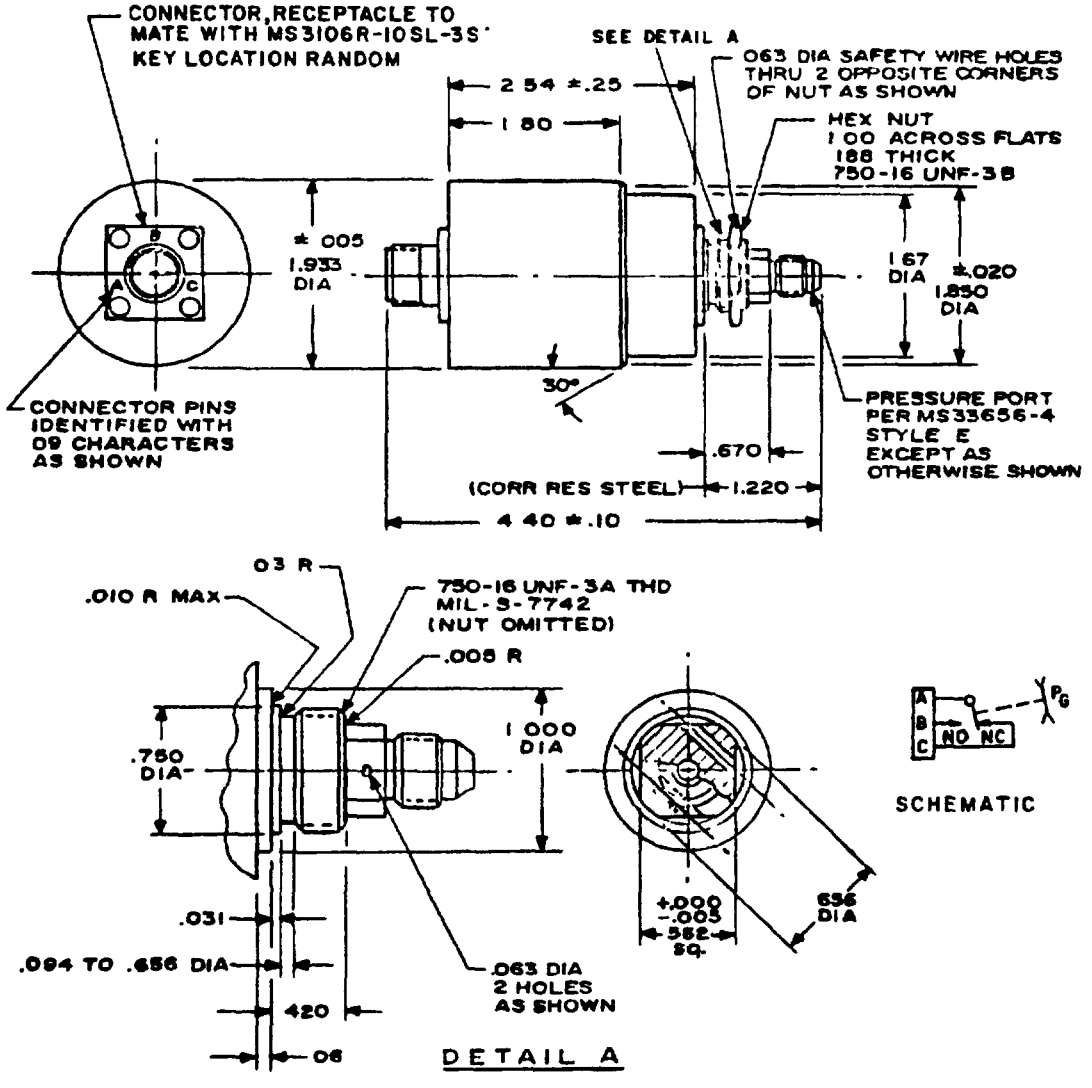


FIGURE 1 Switches

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

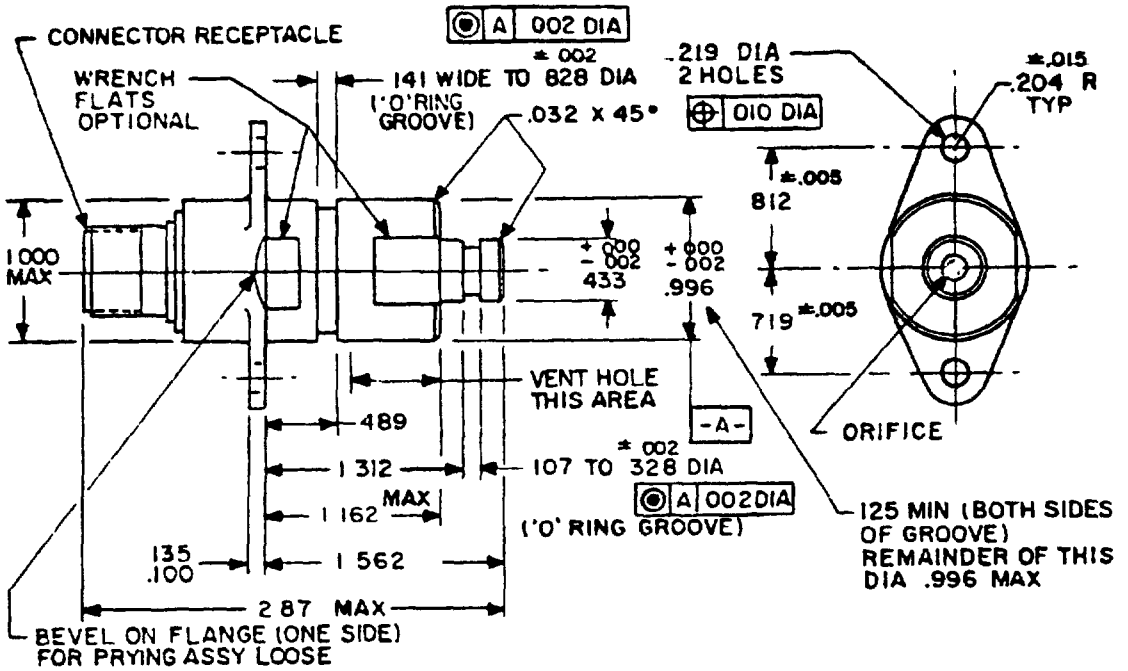


CONFIGURATION	ELECTRICAL CONNECTOR TO MATE WITH	SCHEMATIC	KEY LOCATION (VIEW LOOKING INTO CONNECTOR)
2	AMPHENOL 115-5035 OR EQUIV		
5	MS3106R-10SL-3S		
6	AMPHENOL 115-5035 OR EQUIV		
7	MS3106R-10SL-3S		

Configuration 2, 5, 6 and 7

FIGURE 1 Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

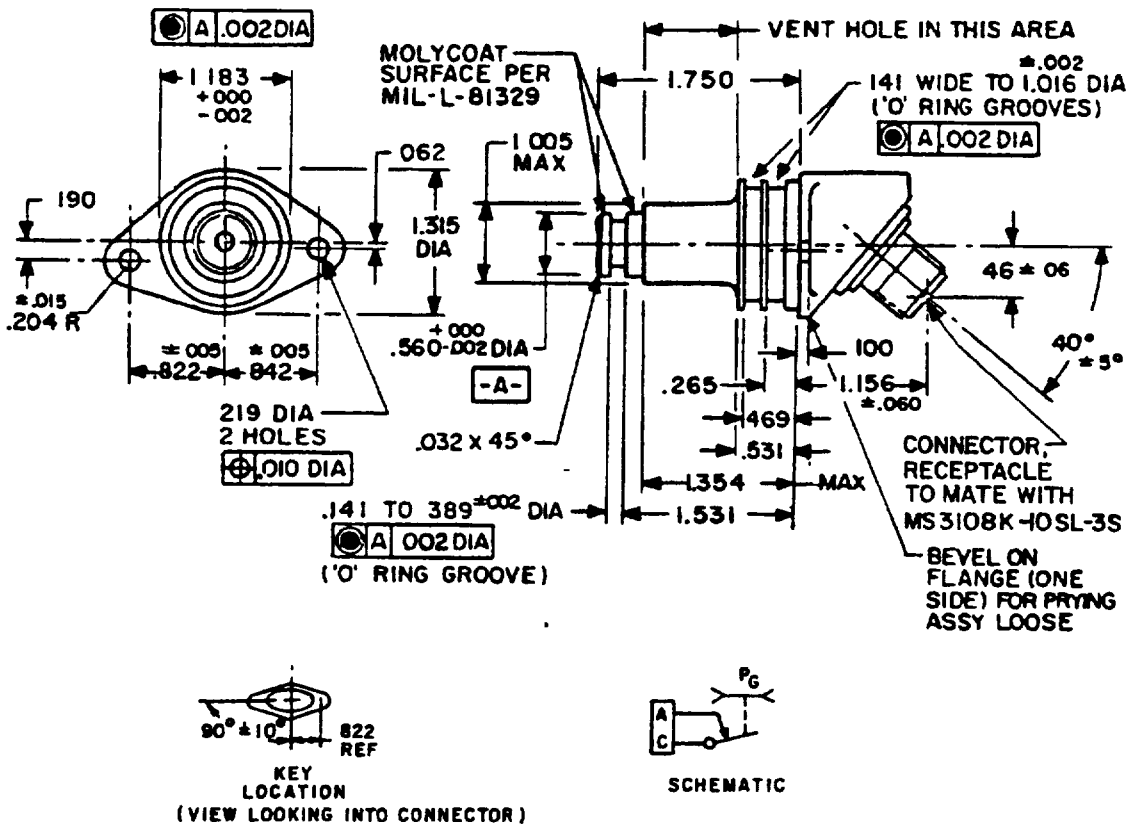

Configuration 3

Figure 1 Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	05	135	3 43	.531	13 49	1.162	29.51
.005	13	141	3 58	560	14 22	1 183	30 05
010	25	.188	4 78	.562	14.27	1.220	30.99
015	38	.190	4 83	656	16.66	1.312	33.32
.020	.51	.204	5 18	.670	17 02	1 315	33 40
031	.79	.219	5.56	.719	18.26	1 354	34.39
03	.8	.25	6 4	.750	19.05	1.531	38.89
032	81	.265	6 73	812	20.62	1 562	39.67
060	1 52	.266	6.76	.822	20.88	1.67	42.4
062	1.57	328	8 33	828	21.03	1 750	44.45
063	1 60	389	9 88	842	21.39	1 80	45 7
09	2.3	420	10 67	996	25.30	1.850	46 99
094	2.39	433	11 00	1.000	25.40	1.933	49 10
100	2.54	46	11 7	1.005	25.53	2.54	64.5
107	2 72	469	11 91	1 016	25.81	2 87	72.9
125	3 18	489	12 42	1.156	29 36	4 40	111 8

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm.
3 Unless otherwise specified, tolerances are XX ± 03 and XXX ± 010
4 All "O" ring grooves 32 rms maximum surface finish
5 Contour of switches optional provided maximum dimensions specified are not exceeded

FIGURE 1 Switches - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and electrical schematic See figure 1

Weight (maximum):
.7 lb (configuration 1).
.2 lb (configuration 2, 3, 5, 6, 7).

Proof pressure 800 lb_f/in^2

System pressure 500 lb_f/in^2.

Burst pressure 1200 lb_f/in^2.

Dead band 25 lb_f/in^2.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 10 amperes inductive (configuration 1) or 2 amperes inductive (configuration 2, 3, 5, 6, 7).
5 amperes lamp load (configuration 1).
10 amperes resistive (configuration 1).

Seal
Electrical chamber Watertight.
Pressure chamber: Watertight.
Reference chamber Watertight.

Electrical connector, electrical connector mating, and key location See figure 1.

Pressure port See figure 1.

Media Oil per MIL-L-7808.

High temperature (operating) B (+275°F) for configuration 1, or C (+350°F) for configuration 2, 3, 5, 6, 7.

Low temperature (operating and nonoperating) D (-65°F).

Altitude D (100,000 feet)

Shock A (50 G).

Vibration S (test condition D, method 204 of MIL-STD-202, except 10 - 2000 Hz, 40 G)

Life (mechanical) A (100,000 cycles).

Life (electrical) C (50,000 cycles).

Acceleration C (8 G) for configuration 1, or D (12 G) for configuration 2, 3, 5, 6, 7.

Pulsation amplitude E (10 percent) for configuration 1, or 50 percent of system pressure for configuration 2, 3, 5, 6, 7.

Pulsation frequency C (200 $\pm$20 Hz) for configuration 1, or D (500 $\pm$50 Hz) for configuration 2, 3, 5, 6, 7.

Pressure rise: E (250,000 $lb_f/in^2/sec$) for configuration 1, or G (1,000,000 $lb_f/in^2/sec$) for configuration 2, 3, 5, 6, 7.

Connector torque Applicable (15 ft lb - both directions)

QUALIFICATION:

Single submission Restricted to switch submitted.
Group submission See table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

PART NUMBER The part number shall consist of the prefix "M9395/10-" followed in turn by a character from table I, a character from table II and a character from table III denoting the high pressure setting, and a character from table II and a character from table III denoting the low pressure setting. Part number M9395/10-AJKGE identifies a pressure switch of configuration 1 which actuates at 85 ±20 lb_f/in^2, and deactuates at 60 ±10 lb_f/in^2.

EXAMPLE

M9395/10- A J K G E

PREFIX.

Code character from table I denoting switch is of configuration 1 and the setting mode is high pressure At, and low pressure At.

Code character from table II denoting the high pressure coarse setting is 80 lb_f/in^2.

Code character from table III denoting addition of 5 lb_f/in^2 to high pressure coarse setting, and tolerance is ±20 lb_f/in^2.

Code character from table II denoting the low pressure coarse setting is 60 lb_f/in^2.

Code character from table III denoting addition of 0 lb_f/in^2 to coarse low pressure setting, and tolerance is ±10 lb_f/in^2.

TABLE I. Code character for combination of configuration and setting mode.

Configuration	Code character		
	Pressure setting mode		
	High pressure At Low pressure At	High pressure At Low pressure Differential	High pressure Differential Low pressure At
1	A	B	C
2	D	E	F
3	G	H	J
4(unused)	---	---	---
5	K	L	M
6	N	P	Q
7	R	S	T

TABLE II. Code character for coarse pressure setting (within 10 lb_f/in^2).

Code character	Coarse setting (lb_f/in^2)	Code character	Coarse setting (lb_f/in^2)	Code character	Coarse setting (lb_f/in^2)
A - - -	0	M - - -	110	Y - - -	220
B - - -	10	N - - -	120	Z - - -	230
C - - -	20	P - - -	130	1 - - -	240
D - - -	30	Q - - -	140	2 - - -	250
E - - -	40	R - - -	150	3 - - -	260
F - - -	50	S - - -	160	4 - - -	270
G - - -	60	T - - -	170	5 - - -	280
H - - -	70	U - - -	180	6 - - -	290
J - - -	80	V - - -	190	7 - - -	300
K - - -	90	W - - -	200		
L - - -	100	X - - -	210		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

TABLE III. Code character for combination of fine pressure setting addition and tolerance.

Fine pressure setting (to be added to coarse pressure setting) (lb_f/in^2)	Code character											
	Tolerance (lb_f/in^2)											
	Min	±5	±10	±15	±20	±25	±30	±40	±50	±60	±80	±100	Max
0	A	C	E	G	J	L	N	Q	S	U	W	Y	1
5	B	D	F	H	K	M	P	R	T	V	X	Z	2

TABLE IV Extent of qualification.

Part number	Number of samples required	Tests	Qualifies
MIL-S-9395/10-AECBC	1 each lamp	Complete per qualification inspection of MIL-S-9395	All configurations
MIL-S-9395/10-GECBC	1 each inductive		
MIL-S-9395/10-A7LYE	1 each inductive		
MIL-S-9395/10-G7LYE	1 each inductive		

SUPERSESSION AND USAGE DATA See table V.

TABLE V. Supersession and usage data.

New part number	Old part number	Used on
M9395/10-AJKGE	M9395/10-01	KC-135, B-52F F-101, F-102
M9395/10-DR1FA	M9395/10-02	F-4, B-57
M9395/10-GR1FA	M9395/10-03	EC/RC 135
M9395/10-KR1FA	M9395/10-05	B-52G
M9395/10-NR1FA	M9395/10-06	C-141
M9395/10-RR1FA	M9395/10-07	C-5A

NOTE
1. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activity.
Navy - MC

Preparing activity
Air Force - 85

(Project 5930-1113-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government **Fold on lines on reverse side, staple in corner,** and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-9395/10D, 23 July 1980

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Stdn
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:13Z
Check the source to verify that this is the current version before use.