
MIL-S-9395/1B
19 February 1974
SUPERSEDING
MIL-S-9395/1A
26 November 1969

MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE (GAGE), TYPE II, SPDT, 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

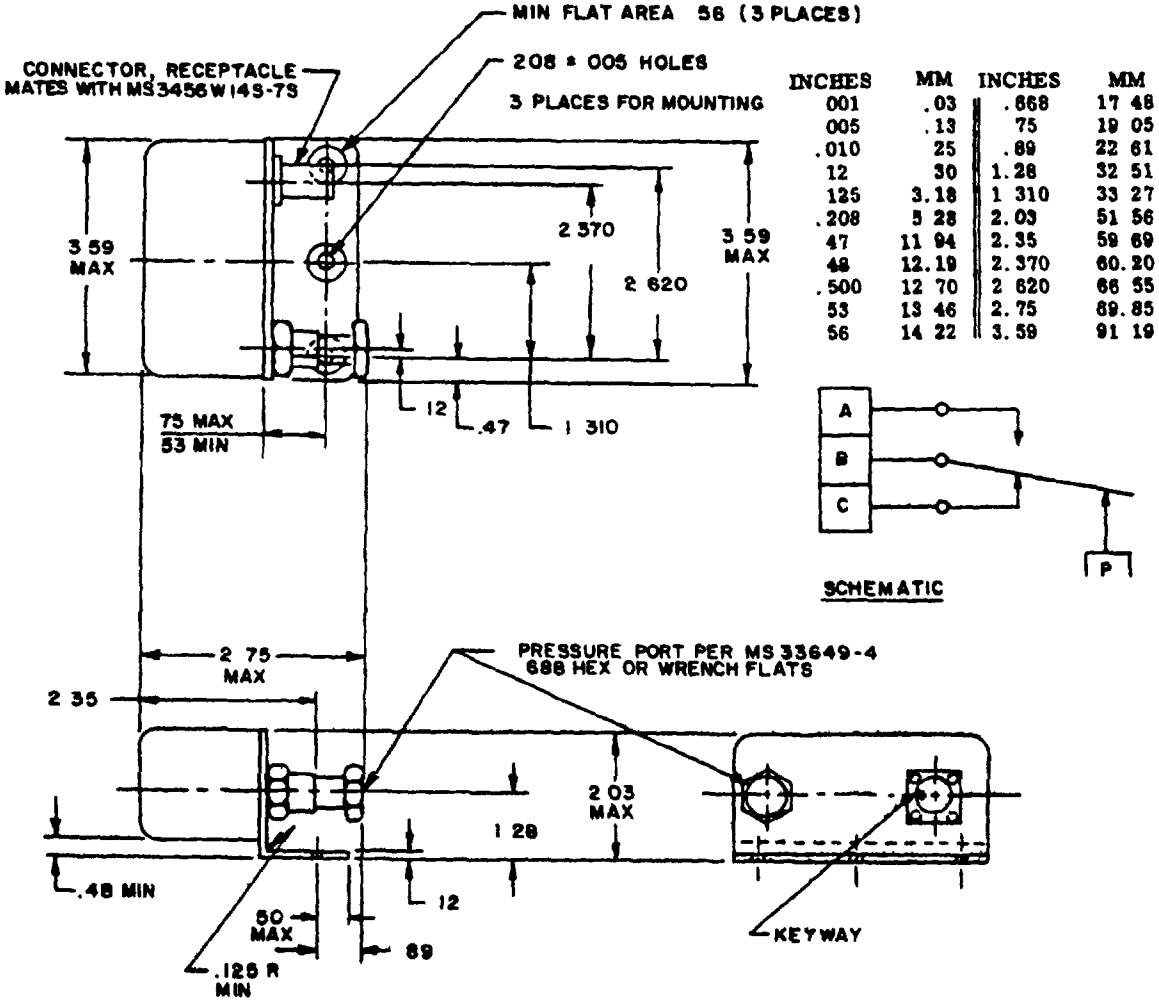

INCHES	MM	INCHES	MM
.001	.03	.668	17.48
.005	.13	.75	19.05
.010	.25	.89	22.61
.12	3.0	1.28	32.51
.125	3.18	1.310	33.27
.208	5.28	2.03	51.56
.47	11.94	2.35	59.69
.48	12.19	2.370	60.20
.500	12.70	2.620	66.55
.53	13.46	2.75	69.85
.56	14.22	3.59	91.19

NOTES.
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .02 (.51 mm) and .010 (.25 mm).
4. Exact shape of switch optional provided dimensions specified are not exceeded.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure.

Weight: 0.5 pound maximum.

Calibration: See table I.
Tolerance: See table I.

Proof pressure: 4,500 psig.

System pressure: 3,100 psig.

Burst pressure: 7,500 psig.

Electrical ratings:
Operating voltage - 18 to 30 Vdc.
Current rating - 3 amperes resistive.
1 ampere inductive, L/R ratio .026.

Seal:
Electrical chamber: Unsealed.
Pressure chamber: Water tight.
Reference chamber: Unsealed.

Media: Hydraulic fluid MIL-H-5606.

High temperature:
Operating - B (275°F).
Nonoperating - C (350°F).

Low temperature:
Operating - D (-65°F).
Nonoperating - E (-85°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202 except 10-2,000 Hz, 20 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: E (10 percent).

Pulsation frequency: D (500 ±50 Hz).

Pressure surge: F (500,000 psi/sec).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Dynamic (moving) seals such as piston with O rings are not acceptable.

The unit shall be factory set with no external means of adjustment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure switch settings.

Dash No.	Pressure switch settings	
	Increasing psig	Decreasing psig
01	1,500 ±50	1,300 ±100
02	Before 700	350 ±50
03	2,850 ±100	2,550 $^{+100}_{-50}$

Part number: M9395/1- (dash number from table I).

Changes from previous issue. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy - AS
Air Force - 11, 17, 80
DSA - ES

User activity:
Navy - MC

Preparing activity:
Air Force - 85

Agent:
DSA - ES

(Project 5930-0880-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-9395/1B Switches, Pressure (GAGE), Type II, SPDT, 3 Amperes

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C18061

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/MMGE
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.