
INCH-POUND
MIL-DTL-9395/1E
24 September 2018
SUPERSEDING
MIL-DTL-9395/1D
3 October 2006

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE (GAGE), TYPE II, SPDT, 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

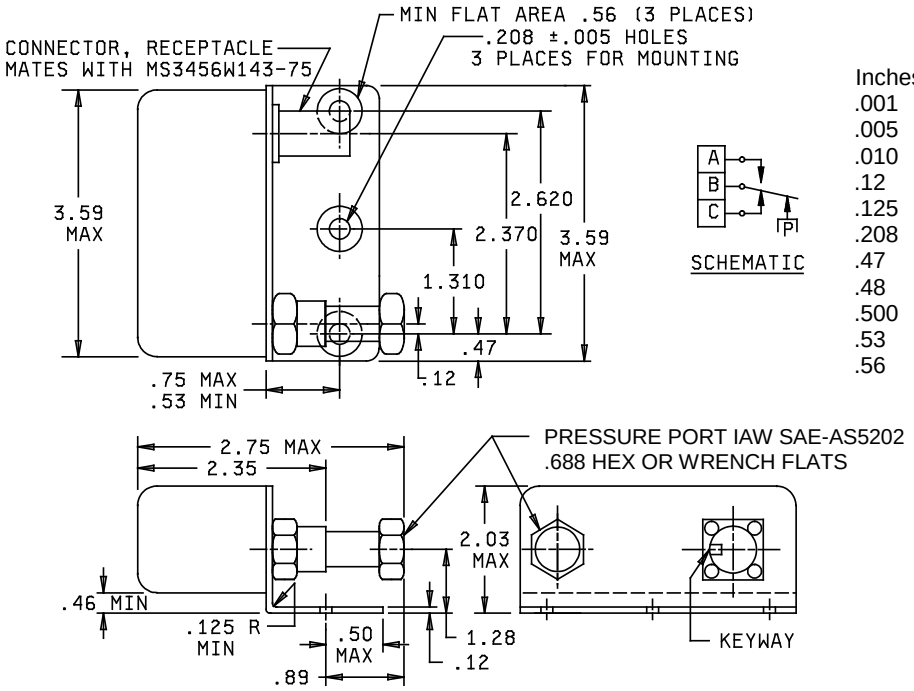

Inches	mm	Inches	mm
.001	0.03	.668	16.97
.005	0.13	.75	19.05
.010	0.25	.89	22.61
.12	3.05	1.28	32.51
.125	3.18	1.310	33.27
.208	5.28	2.03	51.56
.47	11.94	2.35	59.69
.48	12.19	2.370	60.20
.500	12.70	2.620	66.55
.53	13.46	2.75	69.85
.56	14.22	3.59	91.19

NOTES:
1. Dimension are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± .02 (.51 mm) and .010 (.25 mm).
4. Exact shape of switch optional provided dimensions specified are not exceeded.
5. MS3456W143-75 details are found in SAE-AS34561

FIGURE 1. Switches.

AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure.

Weight: 0.5 pound maximum.

Calibration: See table I.
Tolerance: See table I.

Proof pressure: 4,500 psig.

System pressure: 3,100 psig.

Burst pressure: 7,500 psig.

Electrical ratings:
Operating voltage: 18 to 30 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive, L/R ratio .026

Seal:
Electrical chamber: Unsealed.
Pressure chamber: Water tight.
Reference chamber: Unsealed.

Media: Hydraulic fluid MIL-PRF-6083.

High temperature:
Operating - B (275°F).
Nonoperating - C (350°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D of MIL-STD-202-204 except 10-2,000 Hz, 20 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: E (10 percent).

Pulsation frequency: D (500 ±50 Hz).

Pressure surge: F (500,000 psi/sec).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Dynamic (moving) seals such as piston with O rings are not acceptable.

The unit shall be factory set with no external means of adjustment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure switch settings.

Dash no.	Pressure switch settings	
	Increasing psig	Decreasing psig
01	1,500 ±50	1,300 ±100
02	Before 700	350 ±50
03	2,850 ±100	2,550 $^{+100}_{-50}$

Part number: M9395/1-(dash number from table I).

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-PRF-6083
MIL-DTL-9395
MIL-STD-202-204
SAE-AS5202
SAE-AS34561

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2018-035)

Review activities:
Navy - MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.