
MILITARY SPECIFICATION SHEET


SWITCHES, PRESSURE, ABSOLUTE

(TYPE I), 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

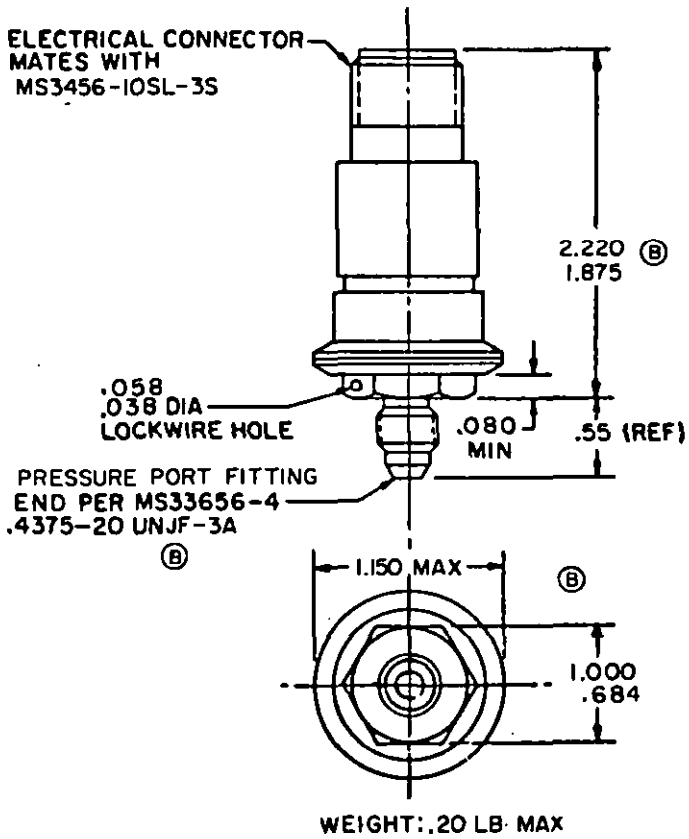

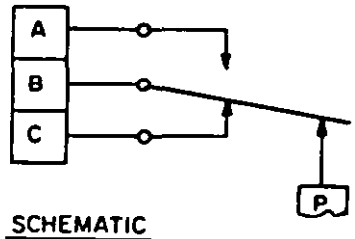


SCHEMATIC


Configuration 1

Ⓑ denotes changes


FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

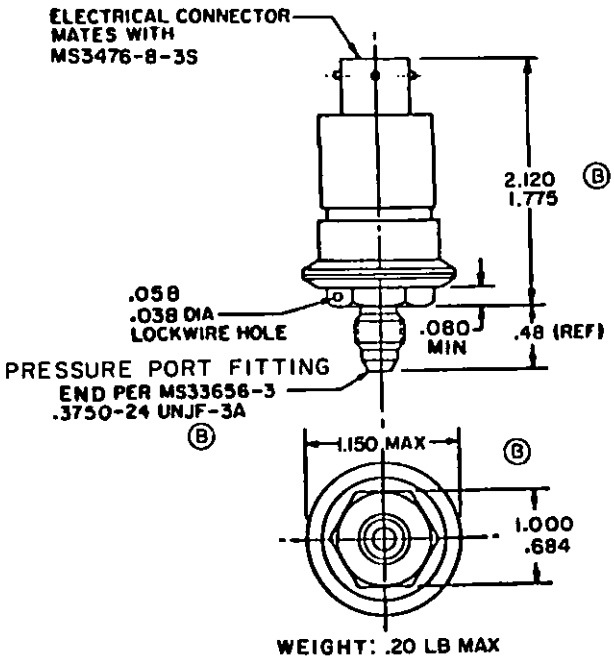




Configuration 2

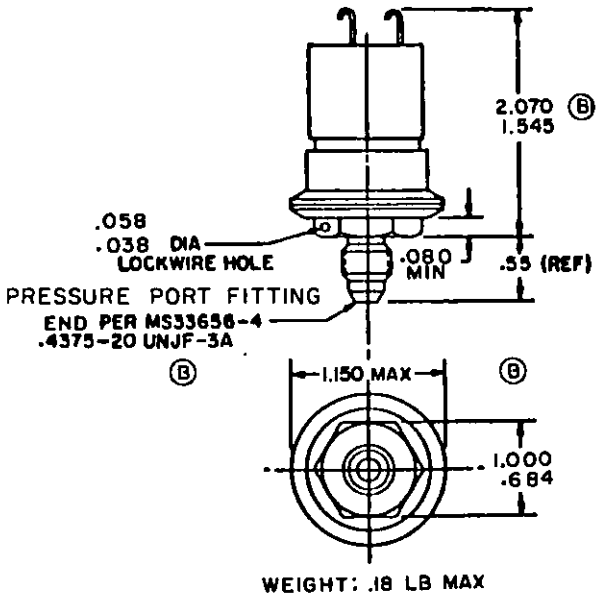





Configuration 3


Source: https://assist.dla.mil -- Downloaded: 202640-17T12:14Z
Check the source to verify that this is the current version before use.

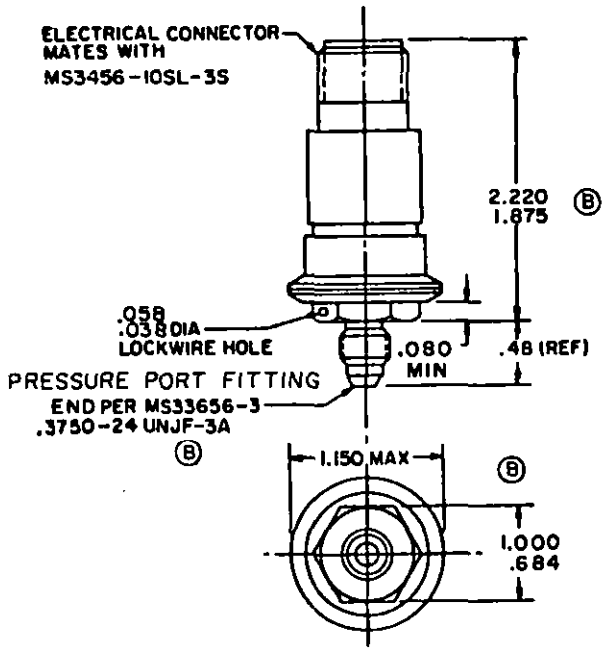




Configuration 4

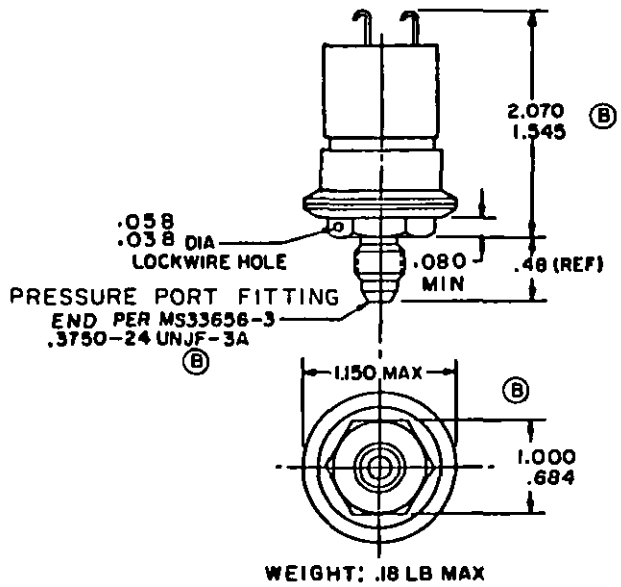




Configuration 5

Source: https://assist.dla.mil -- Downloaded: 202610-17T12:14Z
Check the source to verify that this is the current version before use.

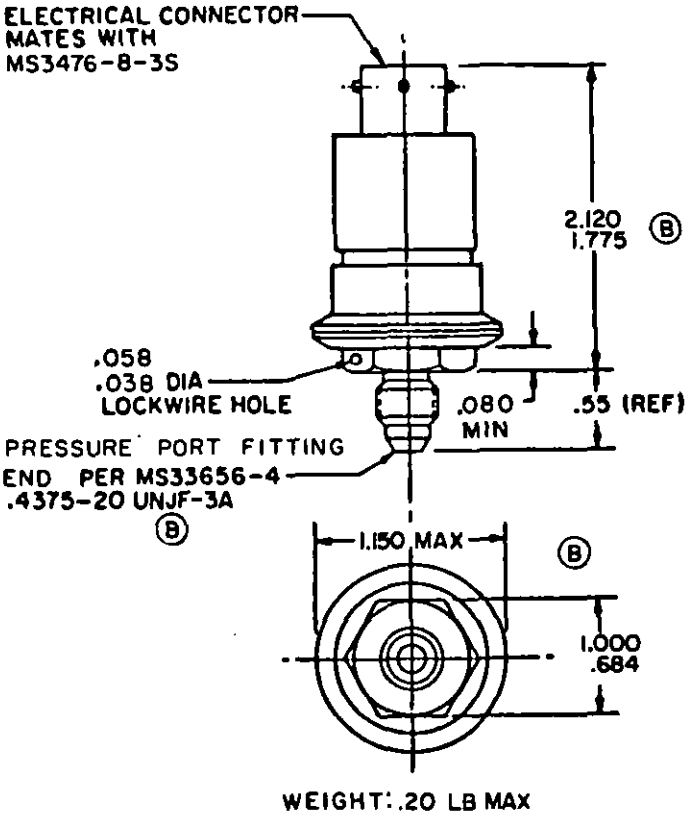

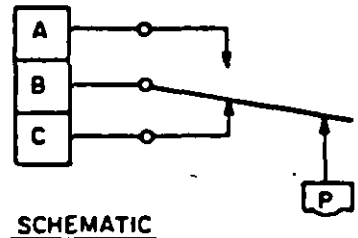

SCHEMATIC

INCHES	MM
.038	.97
.058	1.47
.080	2.03
.48	12.2
.55	14.0
.684	17.37
1.000	25.40
1.150	29.21
1.545	39.24
1.775	45.08
1.875	47.62
2.070	52.58
2.120	53.85
2.220	56.39

Configuration 6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
4. Schematics shown are for switches with pressure ports exposed to zero lb_f/in^2.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figures.

Weight: See figures.

Calibration: See tables I, II, III, and V.
Tolerance and maximum differential: See table I.

Proof pressure: 120 lb_f/in^2

System pressure: 60 lb_f/in^2

Burst pressure: 800 lb_f/in^2

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figures.

Pressure port: See figures.

Media: Dry air, nitrogen, fuel MIL-T-5624, or lube oil MIL-L-7808, or hydraulic fluid MIL-H-5606.

High temperature (operating and nonoperating): B (275° F).

Low temperature (operating and nonoperating): D (-65° F).

Altitude: C (except 80, 000 ft).

Shock: C (100 G).

Vibration: S (test condition C, method 204 of MIL-STD-202, except 10 - 2, 000 Hz, 10 G).

Life mechanical: A (100, 000 cycles).

Life electrical: C (50, 000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 $lb_f/in^2/sec$).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 250 Vrms.

Connector torque: Applicable.

Terminal strength: Applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:14Z
Check the source to verify that this is the currentversion before use.

Part number: Part numbers shall be assigned as illustrated below:

M9395 26- A G E

Specification sheet number	Configuration and contact action	Pressure setting to within 1.0 lb_f/in^2	Pressure setting to within .5 lb_f/in^2
Example -	Configuration A, actuates on increasing pressure (A from table II)	17 lb_f/in^2 (G from table III)	1.0 lb_f/in^2 (E from table IV)

17 lb_f/in^2 +1.0 lb_f/in^2 = 18 lb_f/in^2 (from table I the tolerance is ±.75 lb_f/in^2 and maximum differential is 2.5 lb_f/in^2).

Part number M9395, 26-AGE identifies a pressure switch of configuration A which actuates on increasing pressure at 18.0 ±.75 lb_f in^2 with a maximum differential of 2.5 lb_f/in^2.

TABLE I. Tolerances and maximum differential values for each pressure setting.

Pressure lb_f/in^2	Tolerance (lb_f/in^2) ±	Maximum differential lb_f/in^2
1.0 - 10.5	.75	2.5
11.0 - 20.0	.75	2.5
20.5 - 29.5	1.0	3.0
30.0 - 30.5	1.0	3.1
31.0	1.5	3.2
31.5 - 32.0	1.5	3.3
32.5 - 33.0	1.5	3.4
33.5 - 34.0	1.5	3.5
34.5 - 35.0	1.5	3.6
35.5 - 36.0	1.5	3.7
36.5 - 37.0	1.5	3.8
37.5 - 38.0	1.5	3.9
38.5 - 39.0	1.5	4.0
39.5 - 40.0	1.5	4.1
40.5 - 41.0	1.5	4.2
41.5 - 42.0	1.5	4.3
42.5 - 43.0	1.5	4.4
43.5 - 44.0	1.5	4.5
44.5	1.5	4.6
45.0 - 45.5	2.0	4.7
46.0 - 46.5	2.0	4.8
47.0 - 47.5	2.0	4.9
48.0 - 48.5	2.0	5.0
49.0 - 49.5	2.0	5.1
50.0 - 50.5	2.0	5.2
51.0 - 51.5	2.0	5.3
52.0 - 52.5	2.0	5.4
53.0 - 53.5	2.0	5.5
54.0 - 54.5	2.0	5.6
55.0 - 55.5	2.0	5.7
56.0 - 56.5	2.0	5.8
57.0 - 57.5	2.0	5.9
58.0 - 58.5	2.0	6.0
59.0 - 59.5	2.0	6.1
60.0	2.0	6.2

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:14Z
Check the source to verify that this is the current version before use.

TABLE II. Configuration and contact action.

	Configuration					
	1	2	3	4	5	6
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M

TABLE III. Pressure setting to within 1 lb_f/in^2.

Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

TABLE IV. Pressure setting to within .5 lb_f/in^2.

Unit	Code
-1.0	A
-0.5	B
0	C
0.5	D
1.0	E

TABLE V. Extent of qualification.

Part number	No. of samples required	Tests	Qualifies
M9395/26-BAA	1 ea. resistive	Complete per qualification inspection of MIL-S-9395	All
DAA	1 ea. resistive		
GYB	1 ea. inductive		
LYB	1 ea. inductive		
M9395/26-BAA	1 ea. inductive	Group I and group III	
CAE	1 ea. inductive		
LYB	1 ea. resistive		
MZD	1 ea. resistive		

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy -
Air Force - 11, 17, 99

User activities:
Army -
Navy - MC, AS, SH
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1044-1)

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-122/6282

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.