
INCH-POUND
MIL-DTL-9395/26D
3 October 2006
SUPERSEDING
MIL-DTL-9395/26C
30 May 2001

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE, ABSOLUTE (TYPE I), 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

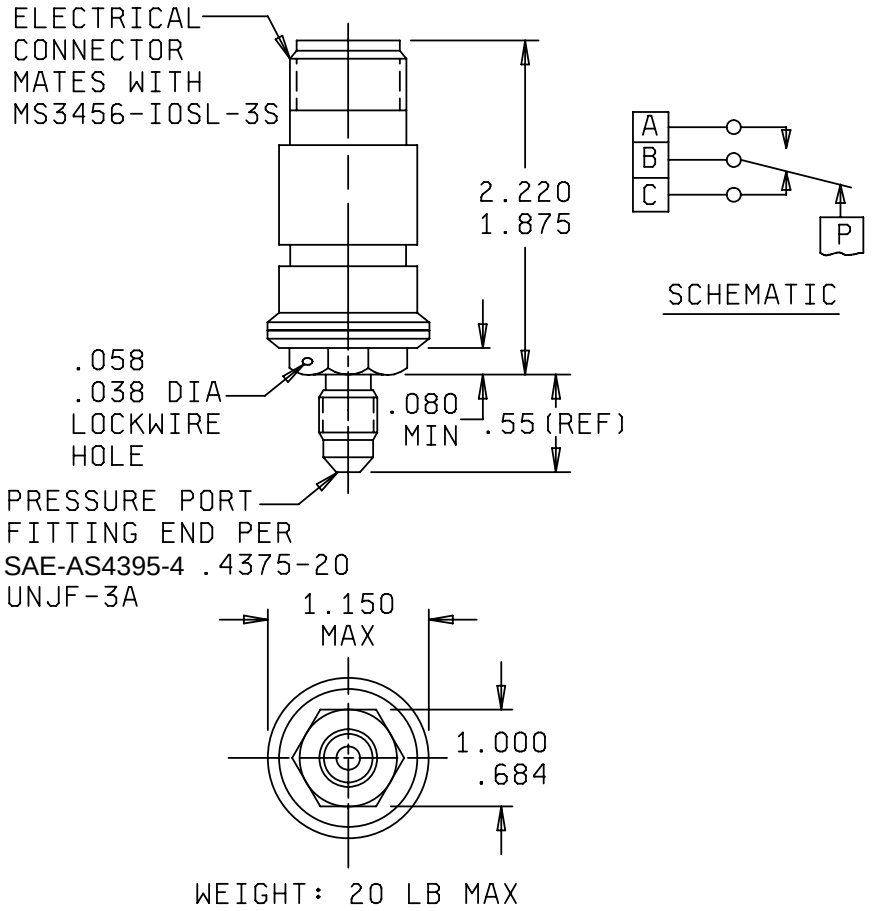


Configuration 1.


AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

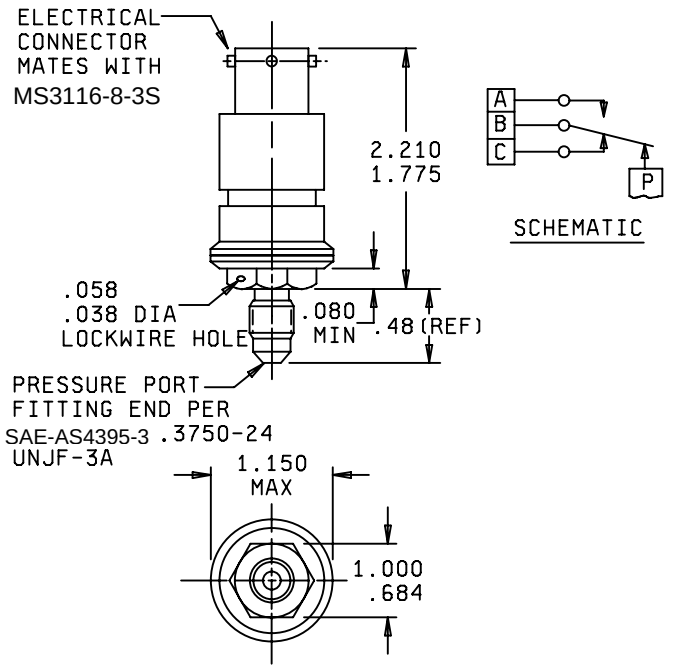


Configuration 2

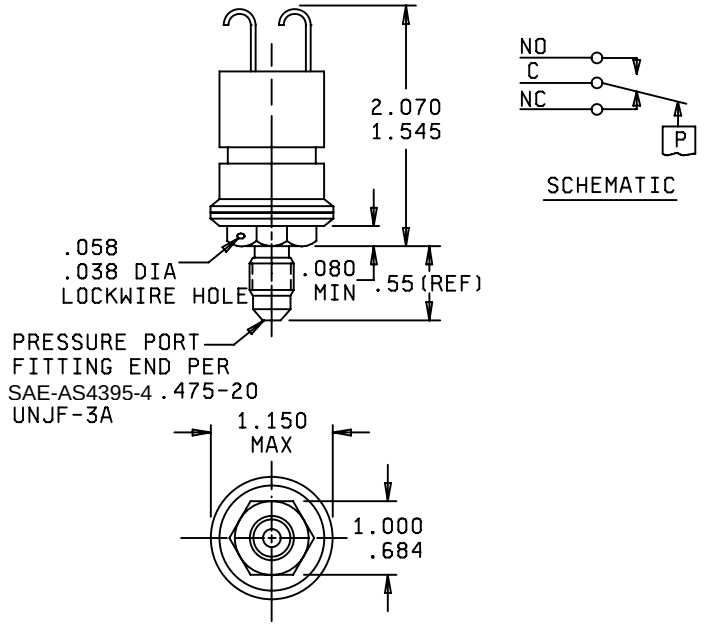


Configuration 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

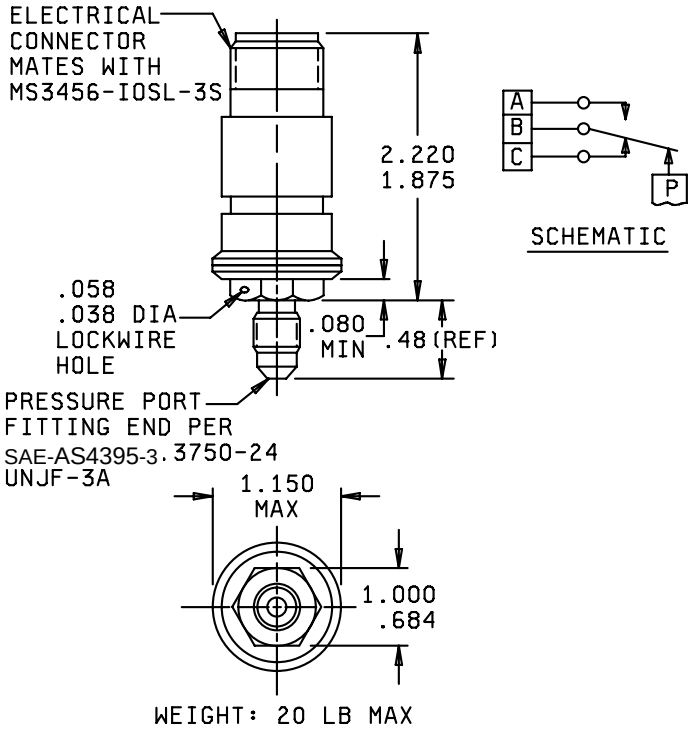


CONFIGURATION 4

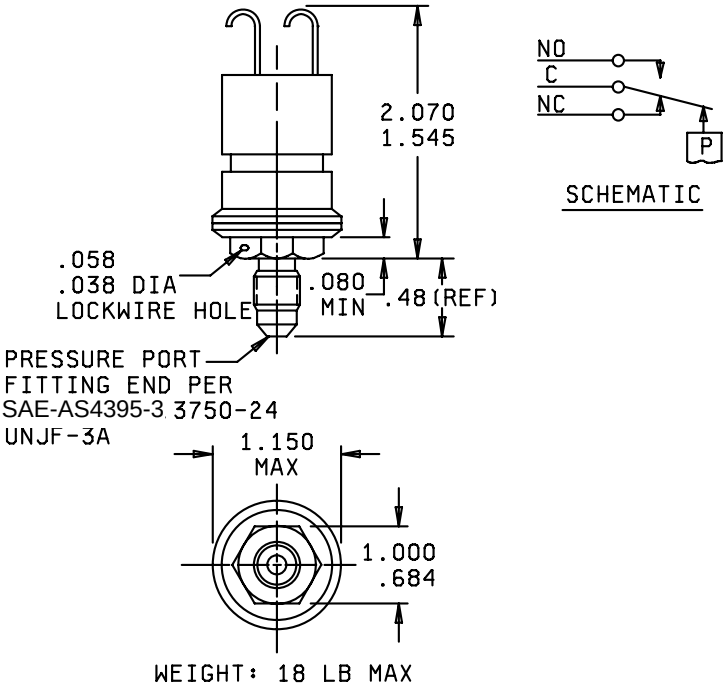

CONFIGURATION 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

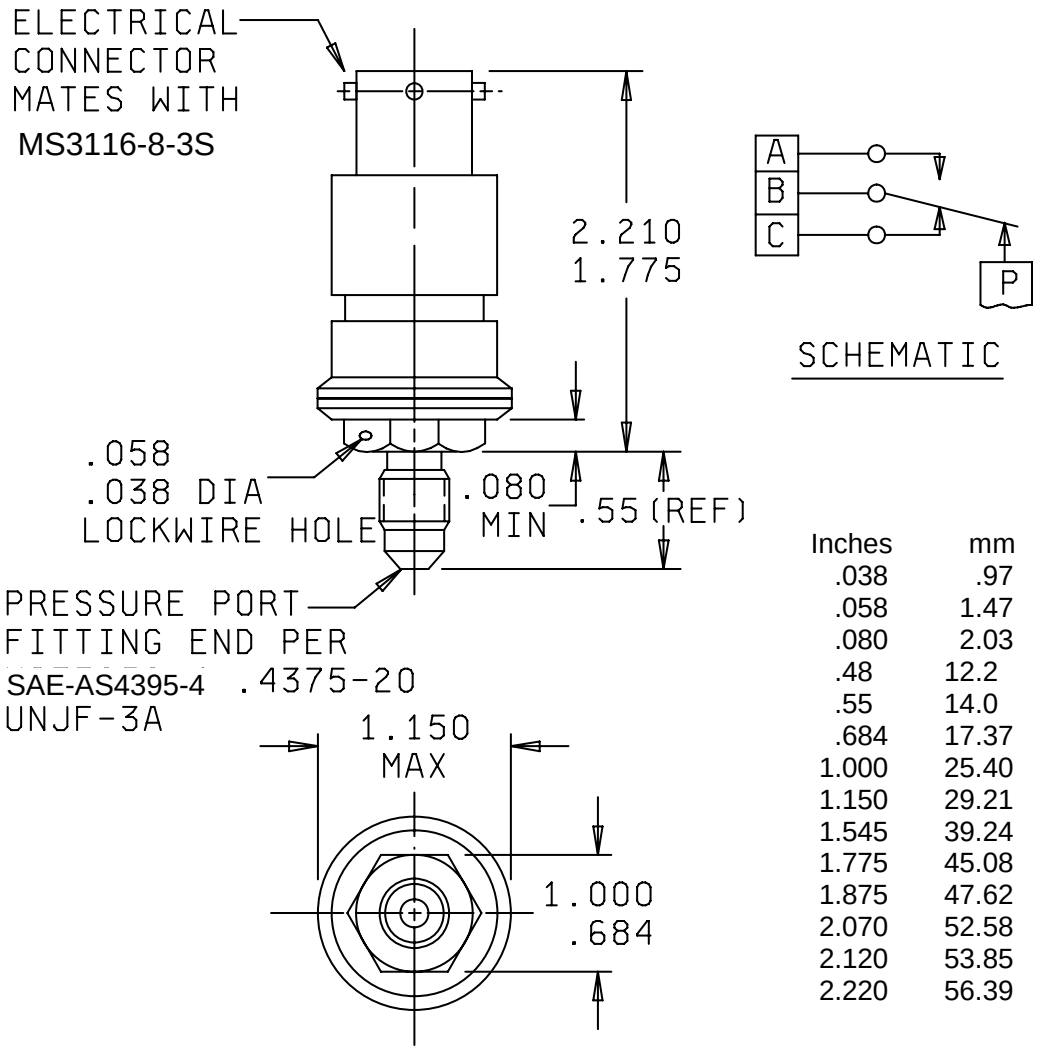

Inches	mm
.038	.97
.058	1.47
.080	2.03
.48	12.2
.55	14.0
.684	17.37
1.000	25.40
1.150	29.21
1.545	39.24
1.775	45.08
1.875	47.62
2.070	52.58
2.120	53.85
2.220	56.39

Configuration 6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
4. Schematics shown are for switches with pressure ports exposed to zero lb_f/in^2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figures.

Weight: See figures.

Calibration: See tables I, II, III, and IV.
Tolerance and maximum differential: See table I.

Proof pressure: 120 lb_f/in^2.

System pressure: 60 lb_f/in^2.

Burst pressure: 800 lb_f/in^2.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figures.

Pressure port: See figures.

Media: Dry air, nitrogen, fuel IAW MIL-DTL-5624, or lube oil IAW MIL-PRF-7808, or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B(275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 ft).

Shock: C (100G).

Vibration: S (test condition C, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 10 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 lb_f/in^2/sec).


Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 250 V rms.

Connector torque: Applicable.

Terminal strength: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

Part number: Part numbers shall be assigned as illustrated below:

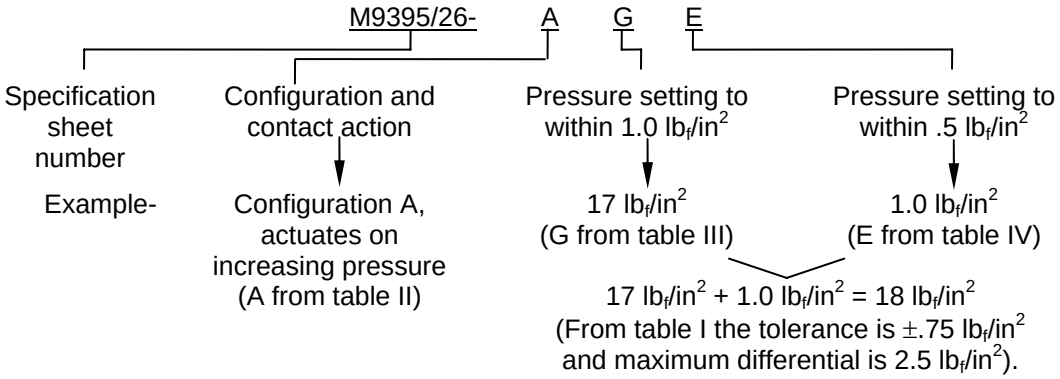

Part number M9395/26-AGE identifies a pressure switch of configuration A which actuates on increasing pressure at 18.0 ±.75 lb_f/in^2 with a maximum differential of 2.5 lb_f/in^2.

TABLE I. Tolerances and maximum differential values for each pressure setting.

Pressure lb_f/in^2	Tolerance lb_f/in^2 ±	Maximum differential lb_f/in^2
1.0 - 10.5	.75	2.5
11.0 - 20.0	.75	2.5
20.5 - 29.5	1.0	3.0
30.0 - 30.5	1.0	3.1
31.0	1.5	3.2
31.5 - 32.0	1.5	3.3
32.5 - 33.0	1.5	3.4
33.5 - 34.0	1.5	3.5
34.5 - 35.0	1.5	3.6
35.5 - 36.0	1.5	3.7
36.5 - 37.0	1.5	3.8
37.5 - 38.0	1.5	3.9
38.5 - 39.0	1.5	4.0
39.5 - 40.0	1.5	4.1
40.5 - 41.0	1.5	4.2
41.5 - 42.0	1.5	4.3
42.5 - 43.0	1.5	4.4
43.5 - 44.0	1.5	4.5
44.5	1.5	4.6
45.0 – 45.5	2.0	4.7
46.0 – 46.5	2.0	4.8
47.0 – 47.5	2.0	4.9
48.0 – 48.5	2.0	5.0
49.0 - 49.5	2.0	5.1
50.0 - 50.5	2.0	5.2
51.0 – 51.5	2.0	5.3
52.0 – 52.5	2.0	5.4
53.0 - 53.5	2.0	5.5
54.0 – 54.5	2.0	5.6
55.0 - 55.5	2.0	5.7
56.0 - 56.5	2.0	5.8
57.0 – 57.5	2.0	5.9
58.0 – 58.5	2.0	6.0
59.0 – 59.5	2.0	6.1
60.0	2.0	6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

TABLE II. Configuration and contact action.

	Configuration					
	1	2	3	4	5	6
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M

TABLE III. Pressure setting to within 1 lb_f/in^2.

Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

TABLE IV. Pressure setting to within .5 lb_f/in^2.

Unit	Code
-1.0	A
-0.5	B
0	C
0.5	D
1.0	E

TABLE V. Extent of qualification.

Part number	No. of samples required	Tests	Qualifies
M9395/26-BAE DAE GYB LYB	1 ea. resistive 1 ea. resistive 1 ea. inductive 1 ea. inductive	Complete IAW qualification Inspection of MIL-DTL-9395	All
M9395/26-BAE CAE LYB MZD	1 ea. inductive 1 ea. inductive 1 ea. resistive 1 ea. resistive	Group I and group III	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced Documents:
- MIL-DTL-5624
- MIL-PRF-6083
- MIL-PRF-7808
- MIL-DTL-9395
- MIL-STD-202

Custodians:
- Army - CR
- Navy - EC
- Air Force - 11
- DLA - CC

Preparing Activity:
- DLA - CC

(Project 5930-2006-048)

Review Activities:
- Army - AV
- Navy -AS, MC, SH
- Air Force -99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.