
INCH-POUND
MIL-DTL-9395/26E
24 September 2018
SUPERSEDING
MIL-DTL-9395/26D
3 October 2006

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE, ABSOLUTE (TYPE I), 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

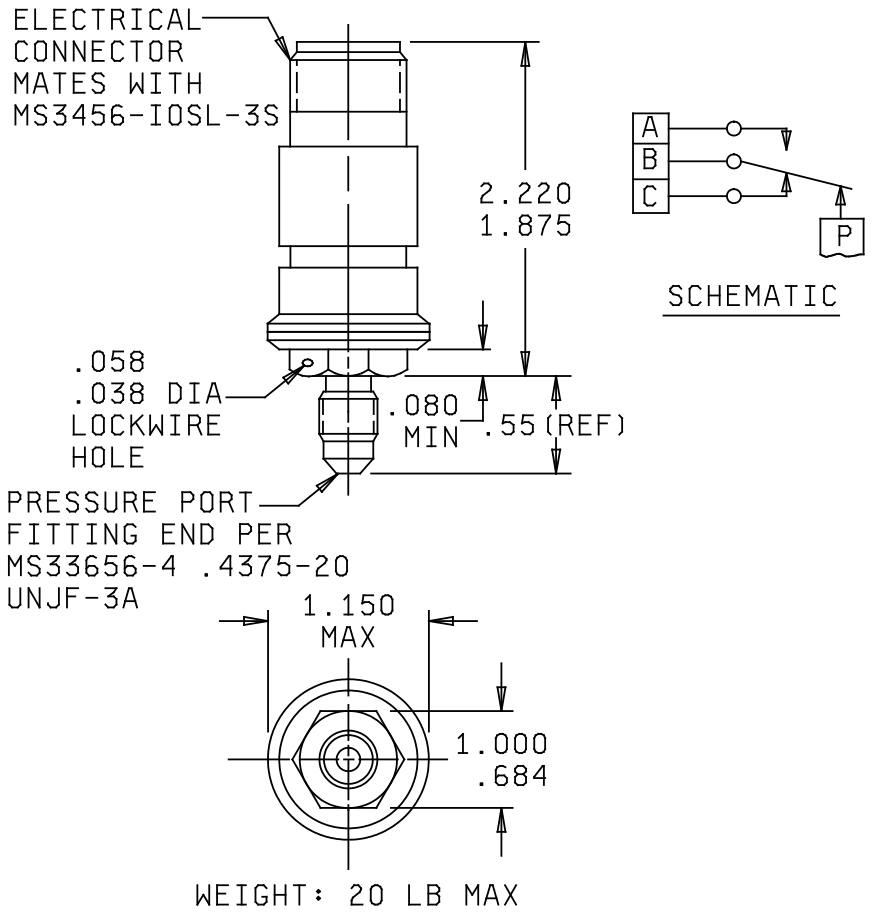



Configuration 1.


AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

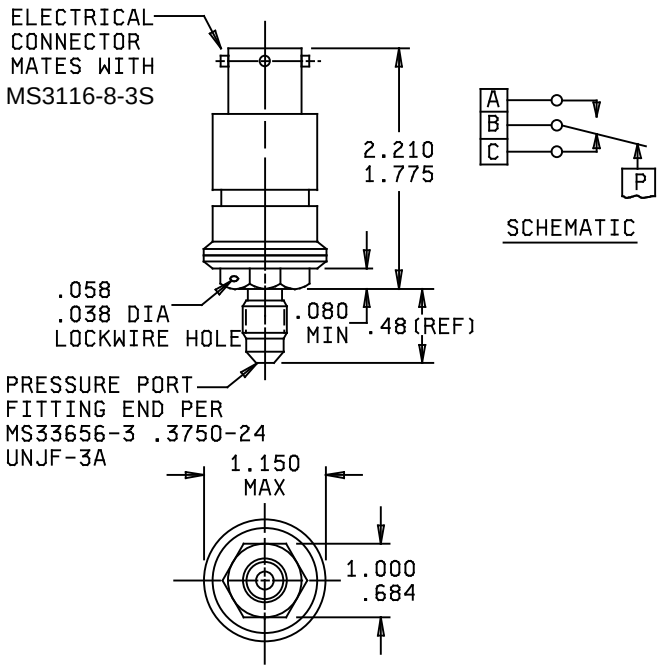



Configuration 2

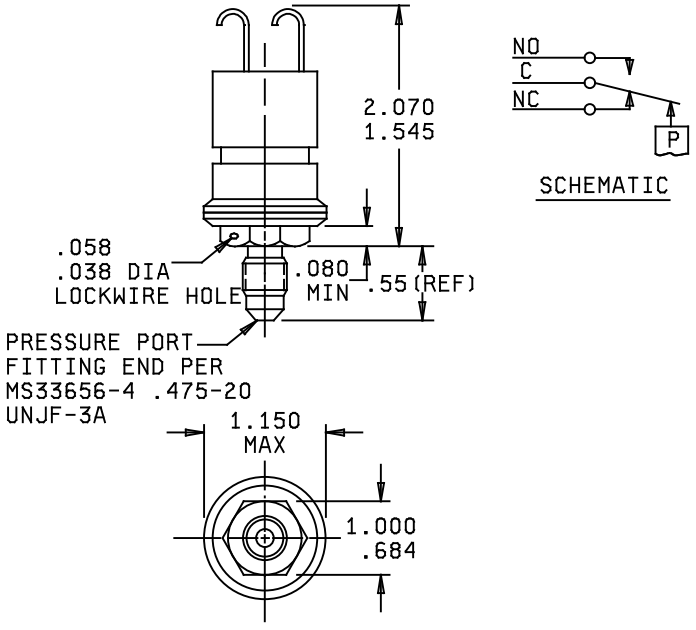


Configuration 3




Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

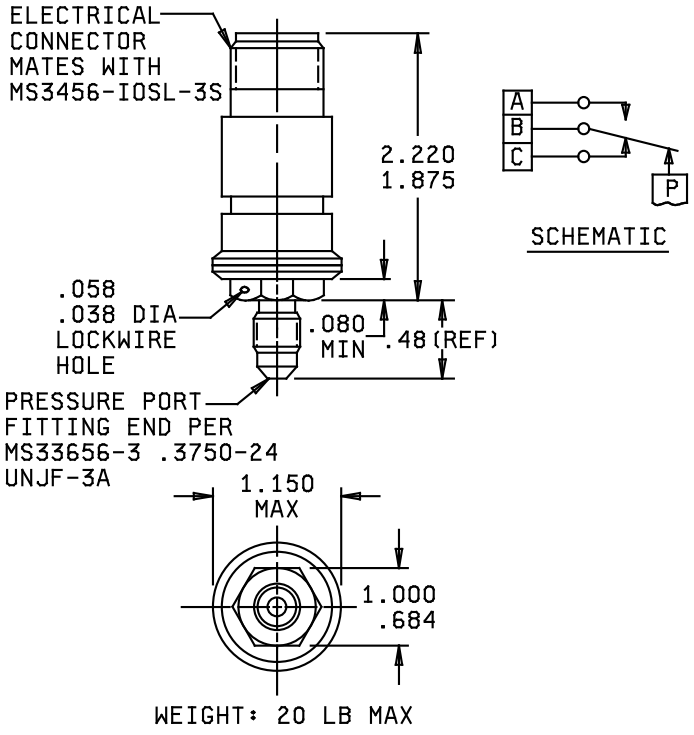


WEIGHT: 20 LB MAX

CONFIGURATION 4

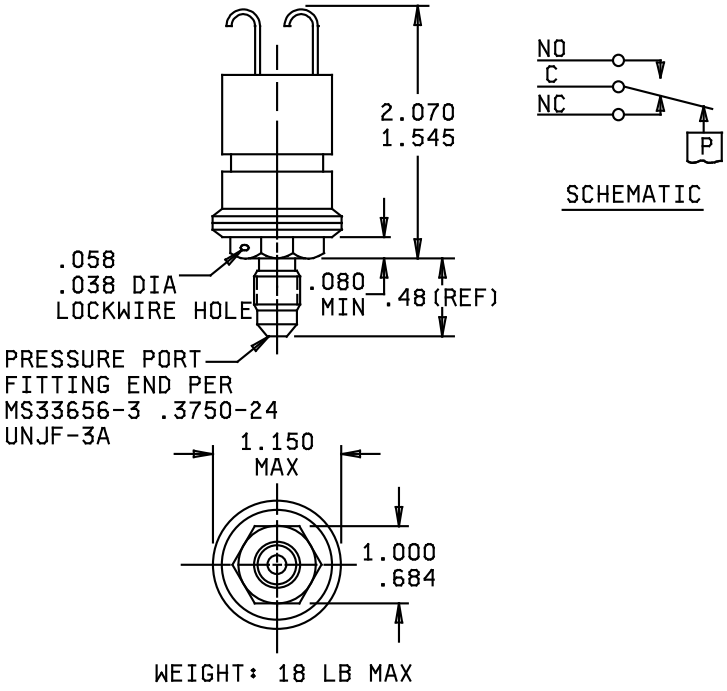



WEIGHT: 18 LB MAX

CONFIGURATION 5



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

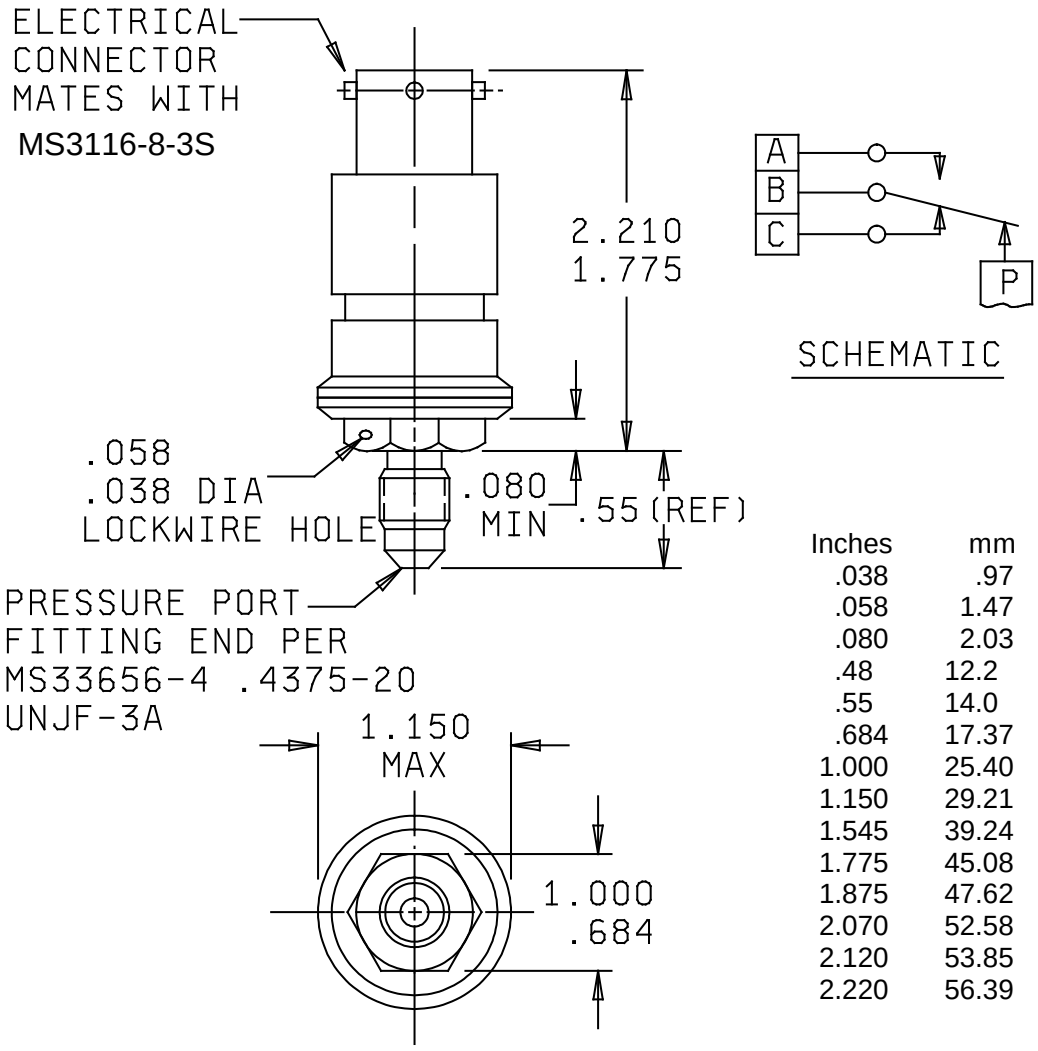


| Inches | mm |
|---|---|
| .038 | .97 |
| .058 | 1.47 |
| .080 | 2.03 |
| .48 | 12.2 |
| .55 | 14.0 |
| .684 | 17.37 |
| 1.000 | 25.40 |
| 1.150 | 29.21 |
| 1.545 | 39.24 |
| 1.775 | 45.08 |
| 1.875 | 47.62 |
| 2.070 | 52.58 |
| 2.120 | 53.85 |
| 2.220 | 56.39 |

Configuration 6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
4. Schematics shown are for switches with pressure ports exposed to zero $lb_f/in^2$.
5. MS3456-IOSL-3S details are found in SAE-AS34561. MS33656-3 and MS33656-4 details are found in SAE-AS4395



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figures.

Weight: See figures.

Calibration: See tables I, II, III, and IV.
Tolerance and maximum differential: See table I.

Proof pressure: 120 $lb_f/in^2$.

System pressure: 60 $lb_f/in^2$.

Burst pressure: 800 $lb_f/in^2$.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figures.

Pressure port: See figures.

Media: Dry air, nitrogen, fuel IAW MIL-DTL-5624, or lube oil IAW MIL-PRF-7808, or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B(275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 ft).

Shock: C (100G).

Vibration: S (test condition C, of MIL-STD-202-204, except 10 - 2,000 Hz, 10 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 $lb_f/in^2$/sec).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 250 V rms.


Connector torque: Applicable.

Terminal strength: Applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

Part number: Part numbers shall be assigned as illustrated below:

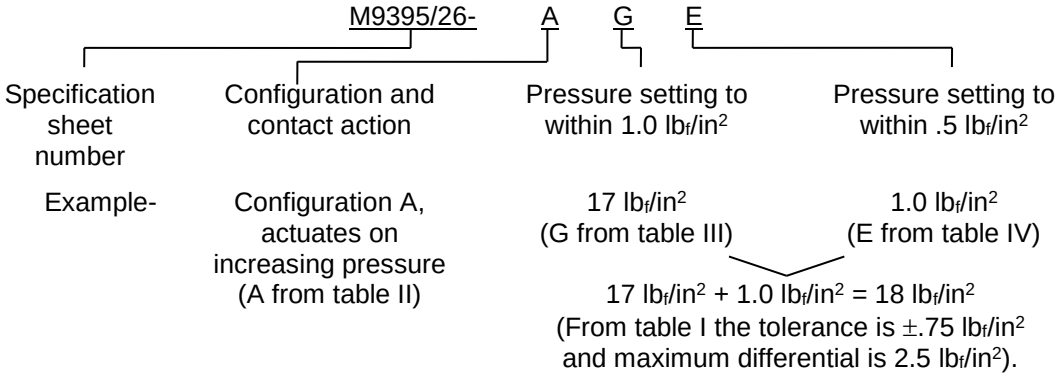


Part number M9395/26-AGE identifies a pressure switch of configuration A which actuates on increasing pressure at 18.0 ±.75 $lb_f/in^2$ with a maximum differential of 2.5 $lb_f/in^2$.

TABLE I. Tolerances and maximum differential values for each pressure setting.

| Pressure $lb_f/in^2$ | Tolerance $lb_f/in^2$ ± | Maximum differential $lb_f/in^2$ |
|---|---|---|
| 1.0 - 10.5 | .75 | 2.5 |
| 11.0 - 20.0 | .75 | 2.5 |
| 20.5 - 29.5 | 1.0 | 3.0 |
| 30.0 - 30.5 | 1.0 | 3.1 |
| 31.0 | 1.5 | 3.2 |
| 31.5 - 32.0 | 1.5 | 3.3 |
| 32.5 - 33.0 | 1.5 | 3.4 |
| 33.5 - 34.0 | 1.5 | 3.5 |
| 34.5 - 35.0 | 1.5 | 3.6 |
| 35.5 - 36.0 | 1.5 | 3.7 |
| 36.5 - 37.0 | 1.5 | 3.8 |
| 37.5 - 38.0 | 1.5 | 3.9 |
| 38.5 - 39.0 | 1.5 | 4.0 |
| 39.5 - 40.0 | 1.5 | 4.1 |
| 40.5 - 41.0 | 1.5 | 4.2 |
| 41.5 - 42.0 | 1.5 | 4.3 |
| 42.5 - 43.0 | 1.5 | 4.4 |
| 43.5 - 44.0 | 1.5 | 4.5 |
| 44.5 | 1.5 | 4.6 |
| 45.0 – 45.5 | 2.0 | 4.7 |
| 46.0 – 46.5 | 2.0 | 4.8 |
| 47.0 – 47.5 | 2.0 | 4.9 |
| 48.0 – 48.5 | 2.0 | 5.0 |
| 49.0 - 49.5 | 2.0 | 5.1 |
| 50.0 - 50.5 | 2.0 | 5.2 |
| 51.0 – 51.5 | 2.0 | 5.3 |
| 52.0 – 52.5 | 2.0 | 5.4 |
| 53.0 - 53.5 | 2.0 | 5.5 |
| 54.0 – 54.5 | 2.0 | 5.6 |
| 55.0 - 55.5 | 2.0 | 5.7 |
| 56.0 - 56.5 | 2.0 | 5.8 |
| 57.0 – 57.5 | 2.0 | 5.9 |
| 58.0 – 58.5 | 2.0 | 6.0 |
| 59.0 – 59.5 | 2.0 | 6.1 |
| 60.0 | 2.0 | 6.2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

TABLE II. Configuration and contact action.

| | Configuration | | | | | |
|---|---|---|---|---|---|---|
| | 1 | 2 | 3 | 4 | 5 | 6 |
| Actuates on increasing pressure | A | C | E | G | J | L |
| Actuates on decreasing pressure | B | D | F | H | K | M |

TABLE III. Pressure setting to within 1 $lb_f/in^2$.

| Pressure | Code | Pressure | Code | Pressure | Code |
|---|---|---|---|---|---|
| 2.0 | A | 22.0 | J | 42.0 | S |
| 4.5 | B | 24.5 | K | 44.5 | T |
| 7.0 | C | 27.0 | L | 47.0 | U |
| 9.5 | D | 29.5 | M | 49.5 | V |
| 12.0 | E | 32.0 | N | 52.0 | W |
| 14.5 | F | 34.5 | P | 54.5 | X |
| 17.0 | G | 37.0 | Q | 57.0 | Y |
| 19.5 | H | 39.5 | R | 59.5 | Z |

TABLE IV. Pressure setting to within .5 $lb_f/in^2$.

| Unit | Code |
|---|---|
| -1.0 | A |
| -0.5 | B |
| 0 | C |
| 0.5 | D |
| 1.0 | E |

TABLE V. Extent of qualification.

| Part number | No. of samples required | Tests | Qualifies |
|---|---|---|---|
| M9395/26-BAE<br>DAE<br>GYB<br>LYB | 1 ea. resistive<br>1 ea. resistive<br>1 ea. inductive<br>1 ea. inductive | Complete IAW qualification<br>Inspection of MIL-DTL-9395 | All |
| M9395/26-BAE<br>CAE<br>LYB<br>MZD | 1 ea. inductive<br>1 ea. inductive<br>1 ea. resistive<br>1 ea. resistive | Group I and<br>group III | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
- MIL-DTL-5624
- MIL-PRF-6083
- MIL-PRF-7808
- MIL-DTL-9395
- MIL-STD-202-204
- SAE-AS34561
- SAE-AS4395

Custodians:
- Army - CR
- Navy - EC
- Air Force - 85
- DLA - CC

Preparing Activity:
- DLA - CC

(Project 5930-2018-039)

Review Activities:
- Navy -AS, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.