
INCH-POUND
MIL-DTL-9395/26F
12 August 2024
SUPERSEDING
MIL-DTL-9395/26E
24 September 2018

DETAIL SPECIFICATION SHEET

SWITCHES, PRESSURE, ABSOLUTE (TYPE I), 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the switches described herein shall consist of this document and MIL-DTL-9395.

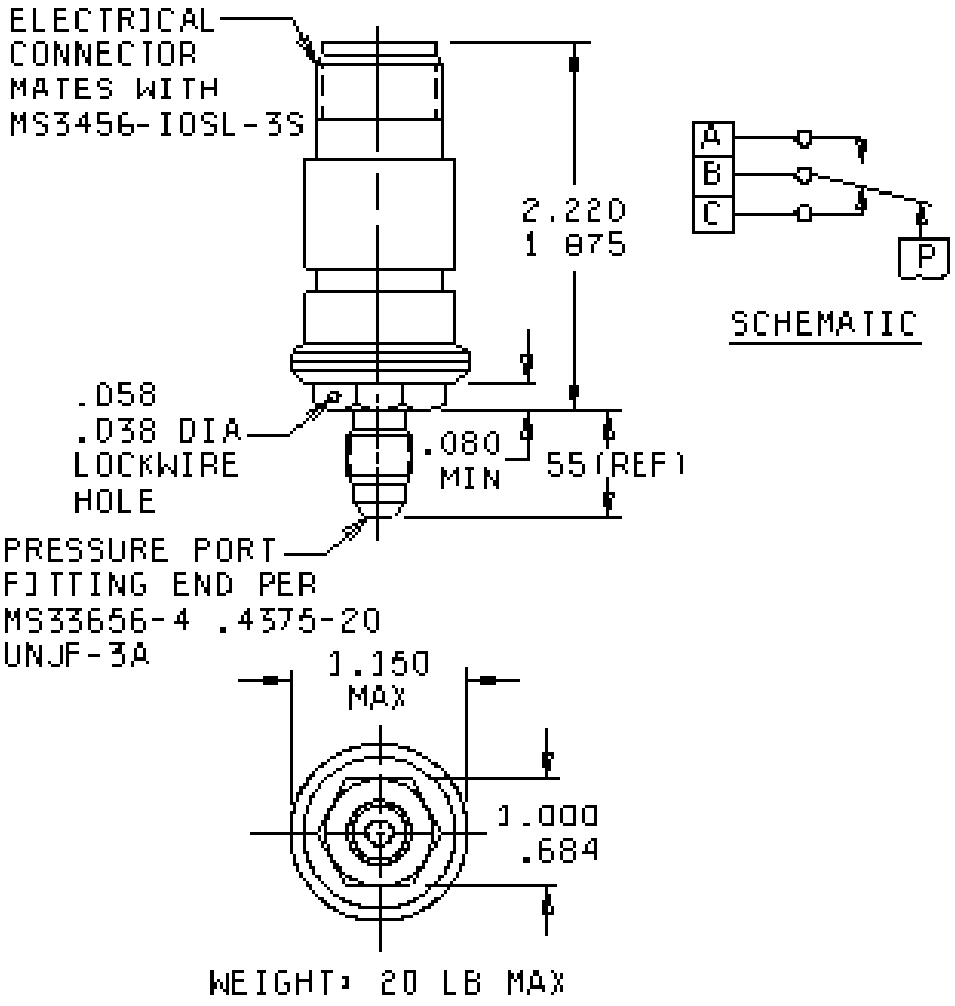


Configuration 1.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

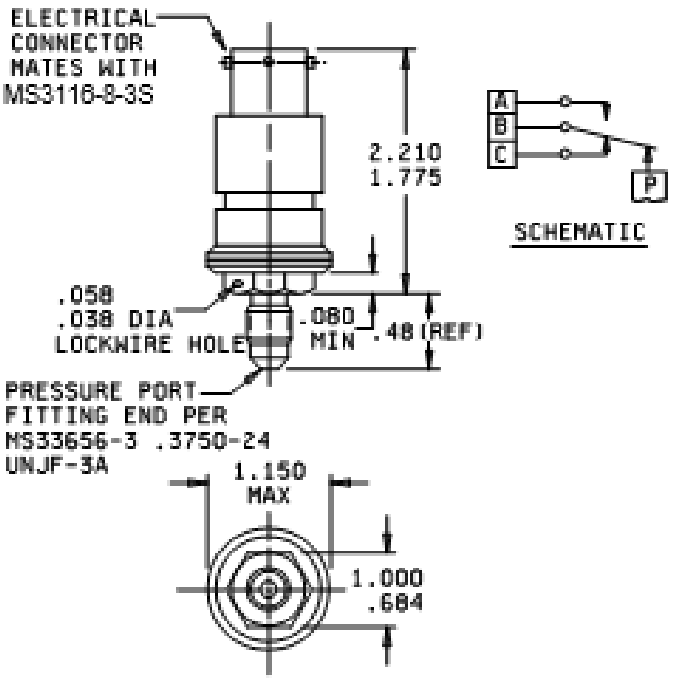


Configuration 2

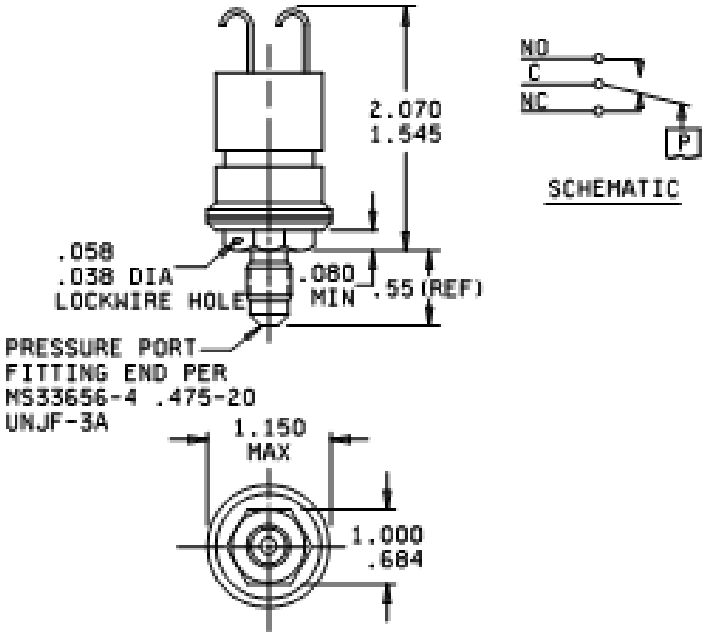


Configuration 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

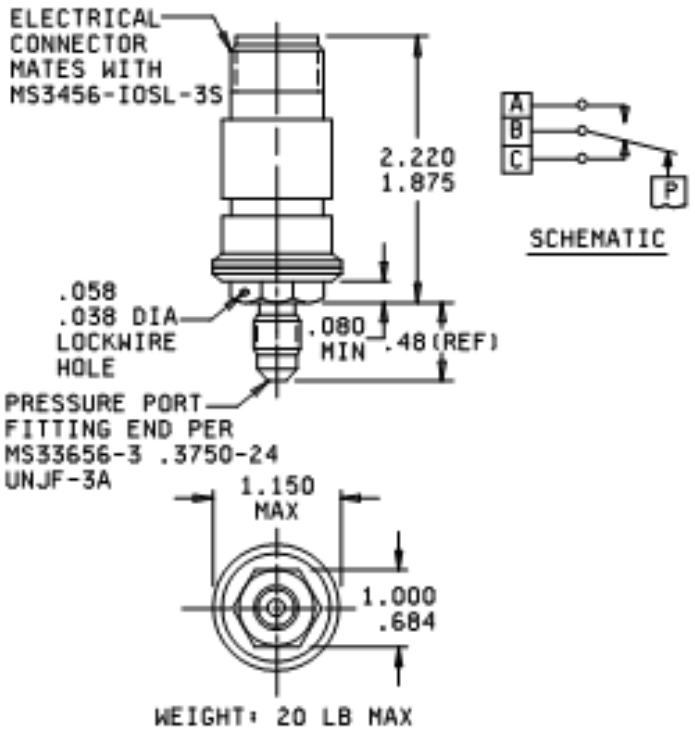


CONFIGURATION 4

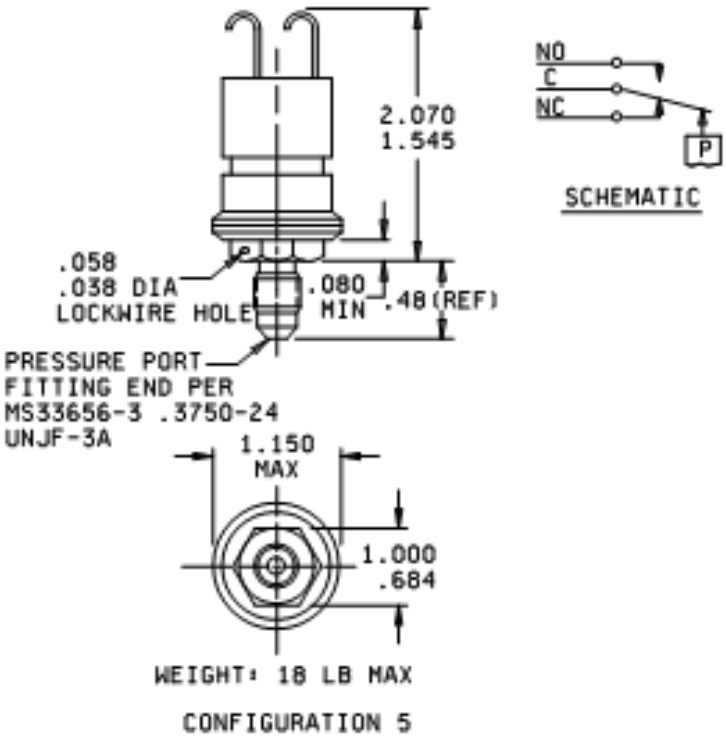

CONFIGURATION 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

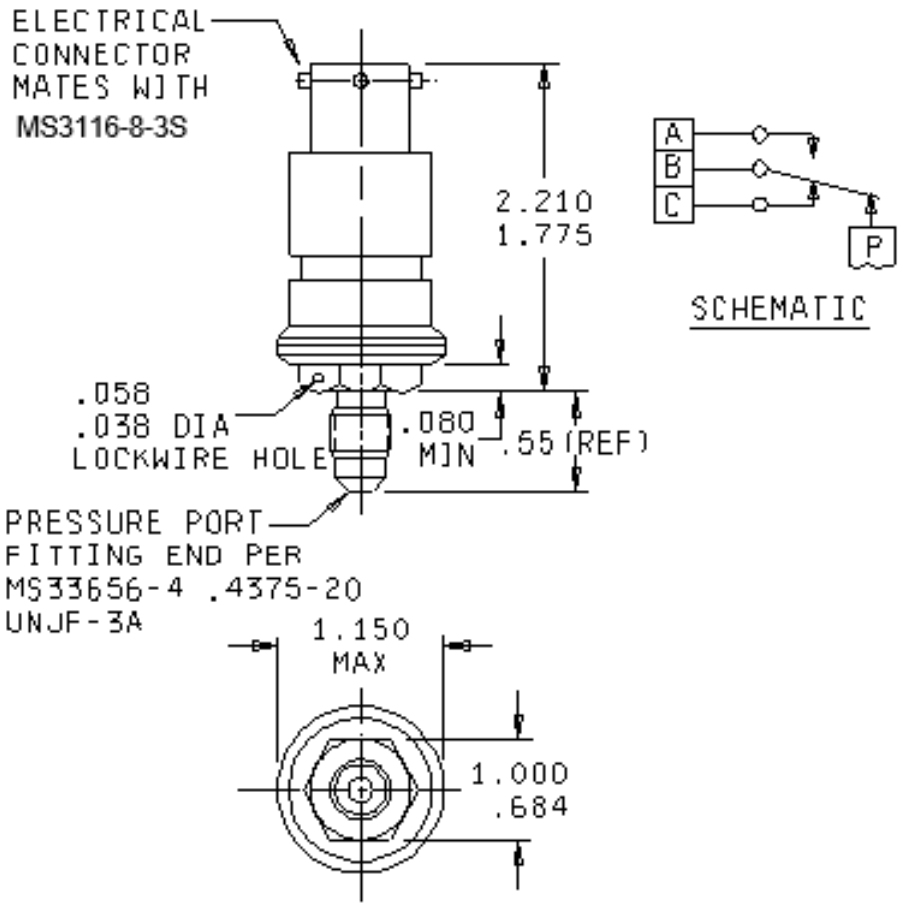

Configuration 6

NOTES:
1. Dimensions are in inches.
2. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
3. Schematics shown are for switches with pressure ports exposed to zero lb_f/in^2.
4. MS3456-IOSL-3S details are found in SAE-AS34561. MS33656-3 and MS33656-4 details are found in SAE-AS4395

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figures.

Weight: See figures.

Calibration: See tables I, II, III, and IV.
Tolerance and maximum differential: See table I.

Proof pressure: 120 lb_f/in^2.

System pressure: 60 lb_f/in^2.

Burst pressure: 800 lb_f/in^2.

Electrical ratings:
Operating voltage: 28 V dc.
Current rating: 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: Hermetic.
Pressure chamber: Hermetic.
Reference chamber: Hermetic.

Electrical connector: See figures.

Pressure port: See figures.

Media: Dry air, nitrogen, fuel IAW MIL-DTL-5624, or lube oil IAW MIL-PRF-7808, or hydraulic fluid IAW MIL-PRF-6083.

High temperature (operating and nonoperating): B(275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 ft).

Shock: C (100G).

Vibration: S (test condition C, of MIL-STD-202-204, except 10 - 2,000 Hz, 10 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 lb_f/in^2/sec).


Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 250 V rms.

Connector torque: Applicable.

Terminal strength: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

Part number: Part numbers shall be assigned as illustrated below:

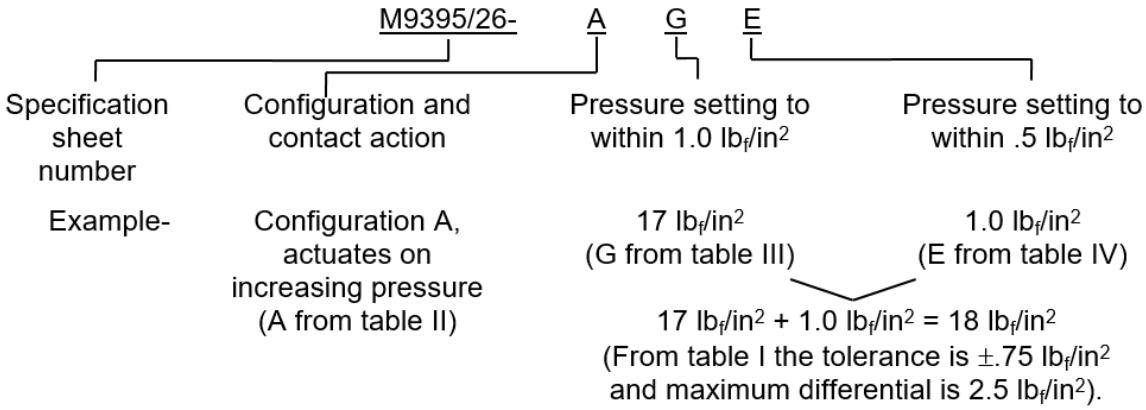

Part number M9395/26-AGE identifies a pressure switch of configuration A which actuates on increasing pressure at 18.0 ±.75 lb_f/in^2 with a maximum differential of 2.5 lb_f/in^2.

TABLE I. Tolerances and maximum differential values for each pressure setting.

Pressure lb_f/in^2	Tolerance lb_f/in^2 ±	Maximum differential lb_f/in^2
1.0 - 10.5	.75	2.5
11.0 - 20.0	.75	2.5
20.5 - 29.5	1.0	3.0
30.0 - 30.5	1.0	3.1
31.0	1.5	3.2
31.5 - 32.0	1.5	3.3
32.5 - 33.0	1.5	3.4
33.5 - 34.0	1.5	3.5
34.5 - 35.0	1.5	3.6
35.5 - 36.0	1.5	3.7
36.5 - 37.0	1.5	3.8
37.5 - 38.0	1.5	3.9
38.5 - 39.0	1.5	4.0
39.5 - 40.0	1.5	4.1
40.5 - 41.0	1.5	4.2
41.5 - 42.0	1.5	4.3
42.5 - 43.0	1.5	4.4
43.5 - 44.0	1.5	4.5
44.5	1.5	4.6
45.0 – 45.5	2.0	4.7
46.0 – 46.5	2.0	4.8
47.0 – 47.5	2.0	4.9
48.0 – 48.5	2.0	5.0
49.0 - 49.5	2.0	5.1
50.0 - 50.5	2.0	5.2
51.0 – 51.5	2.0	5.3
52.0 – 52.5	2.0	5.4
53.0 - 53.5	2.0	5.5
54.0 – 54.5	2.0	5.6
55.0 - 55.5	2.0	5.7
56.0 - 56.5	2.0	5.8
57.0 – 57.5	2.0	5.9
58.0 – 58.5	2.0	6.0
59.0 – 59.5	2.0	6.1
60.0	2.0	6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

TABLE II. Configuration and contact action.

	Configuration					
	1	2	3	4	5	6
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M

TABLE III. Pressure setting to within 1 lb_f/in^2.

Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

TABLE IV. Pressure setting to within .5 lb_f/in^2.

Unit	Code
-1.0	A
-0.5	B
0	C
0.5	D
1.0	E

TABLE V. Extent of qualification.

Part number	No. of samples required	Tests	Qualifies
M9395/26-BAE	1 ea. resistive		
DAE	1 ea. resistive	Complete IAW qualification	
GYB	1 ea. inductive	Inspection of MIL-DTL-9395	
LYB	1 ea. inductive		
M9395/26-BAE	1 ea. inductive		All
CAE	1 ea. inductive	Group I and	
LYB	1 ea. resistive	group III	
MZD	1 ea. resistive		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:

MIL-DTL-5624
MIL-PRF-6083
MIL-PRF-7808
MIL-DTL-9395
MIL-STD-202-204
SAE-AS34561
SAE-AS4395

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5930-2024-049)

Review Activities:
Navy -AS, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:14Z
Check the source to verify that this is the current version before use.