
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, GAUGE
(TYPE II), 3 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

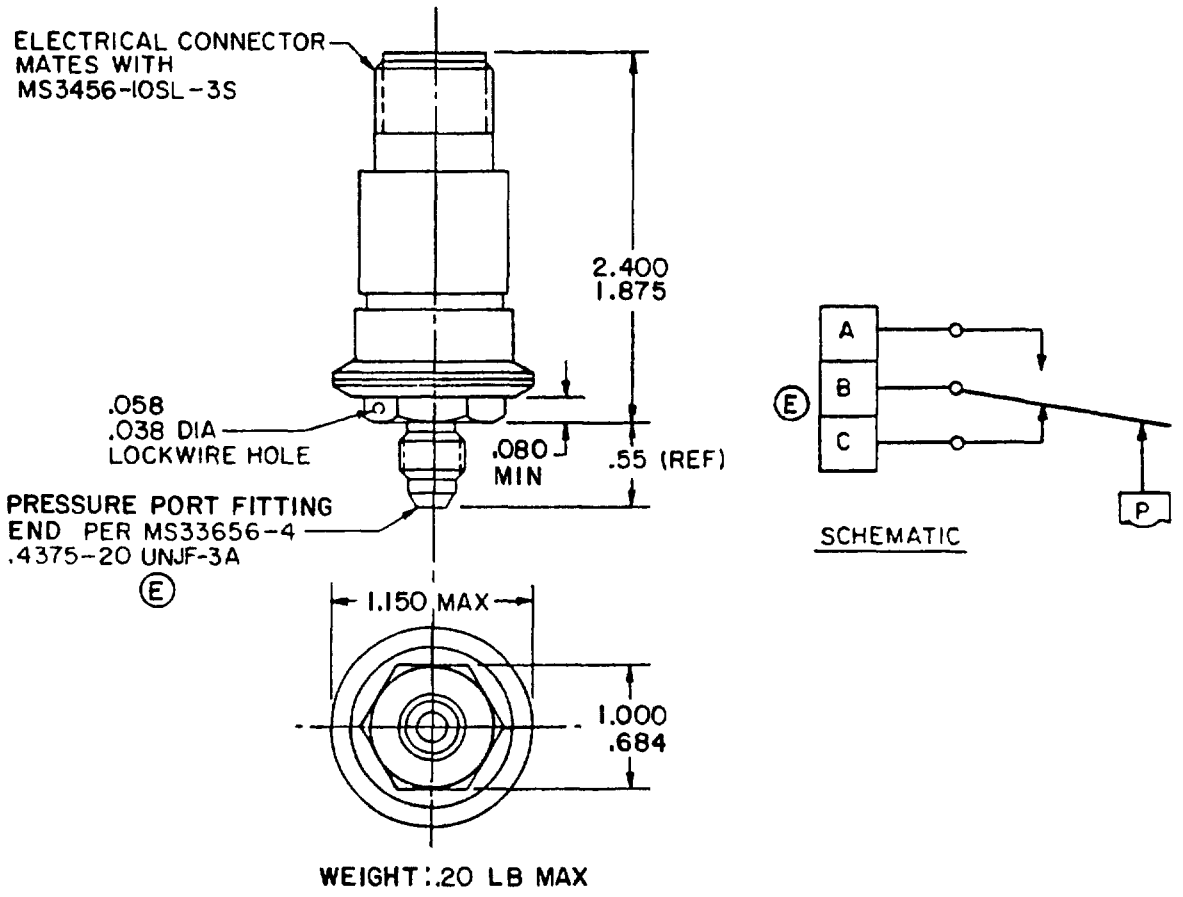


CONFIGURATION 1

FIGURE 1. Dimensions and configurations.

Ⓔ denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

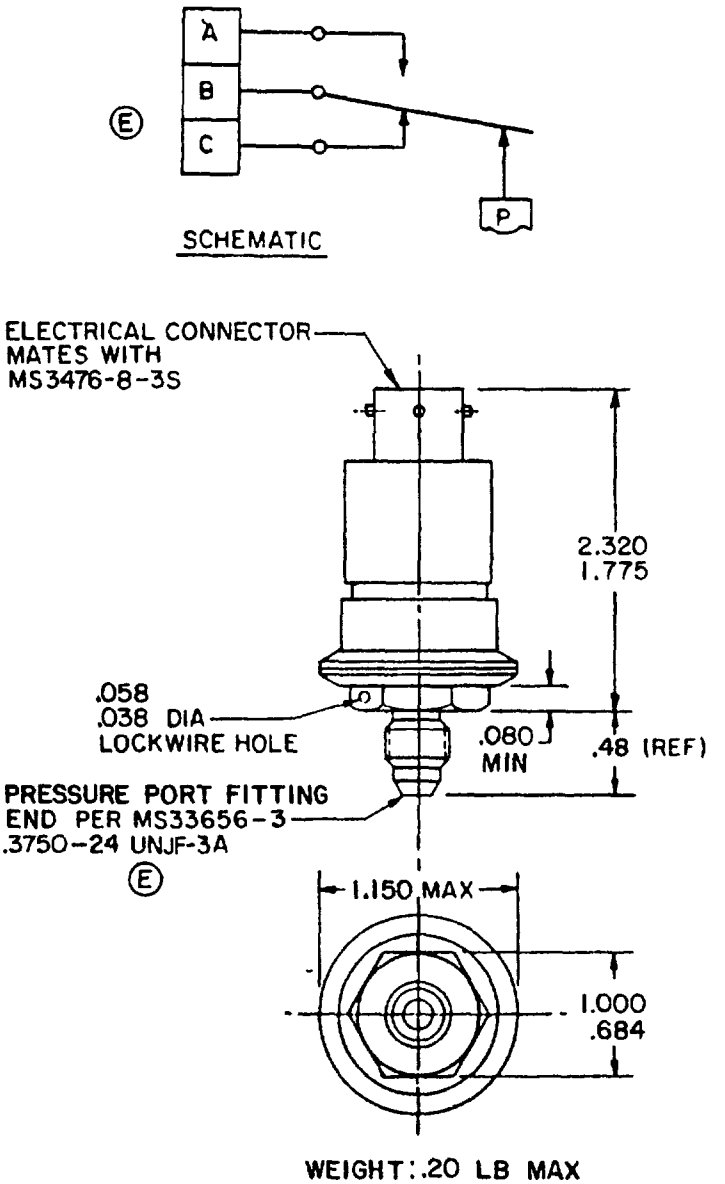


CONFIGURATION 2

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

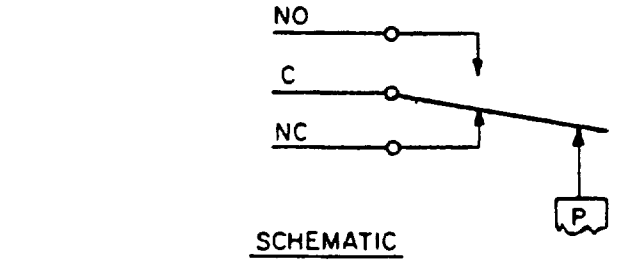


SCHEMATIC

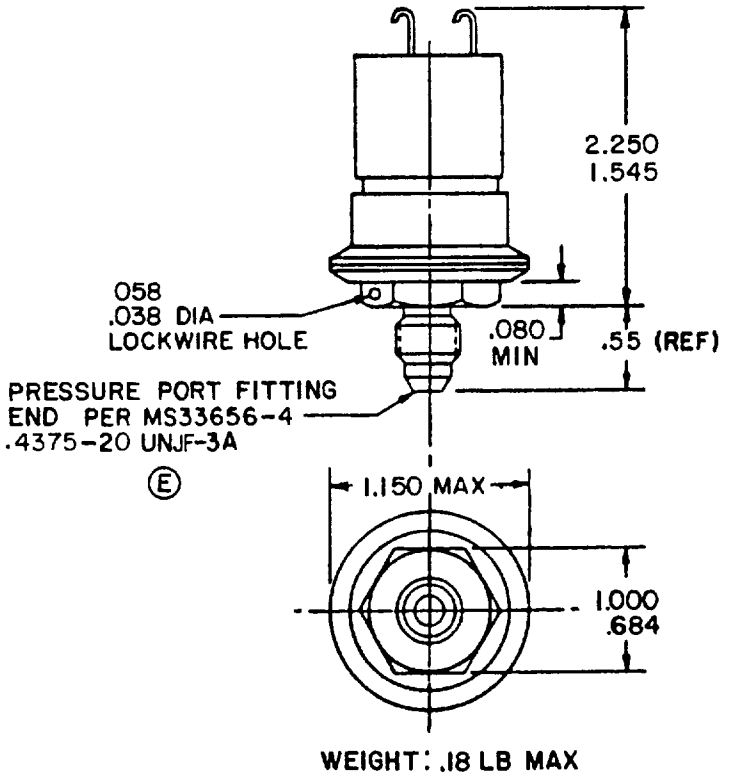


CONFIGURATION 3

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

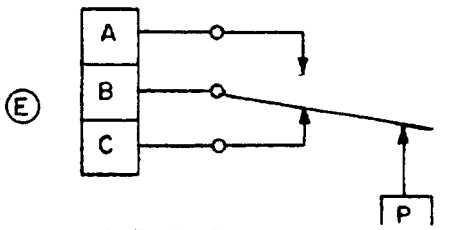


SCHEMATIC

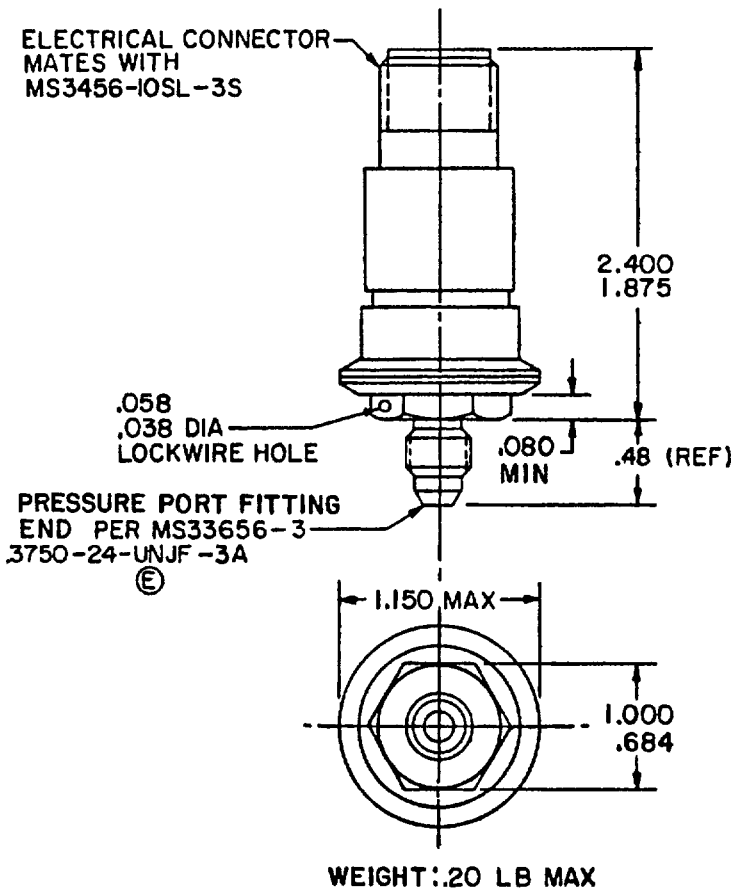


CONFIGURATION 4

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

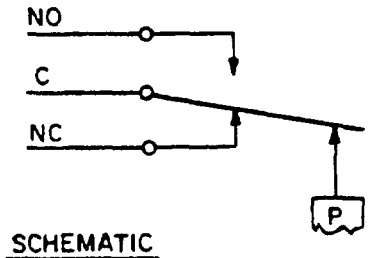


SCHEMATIC

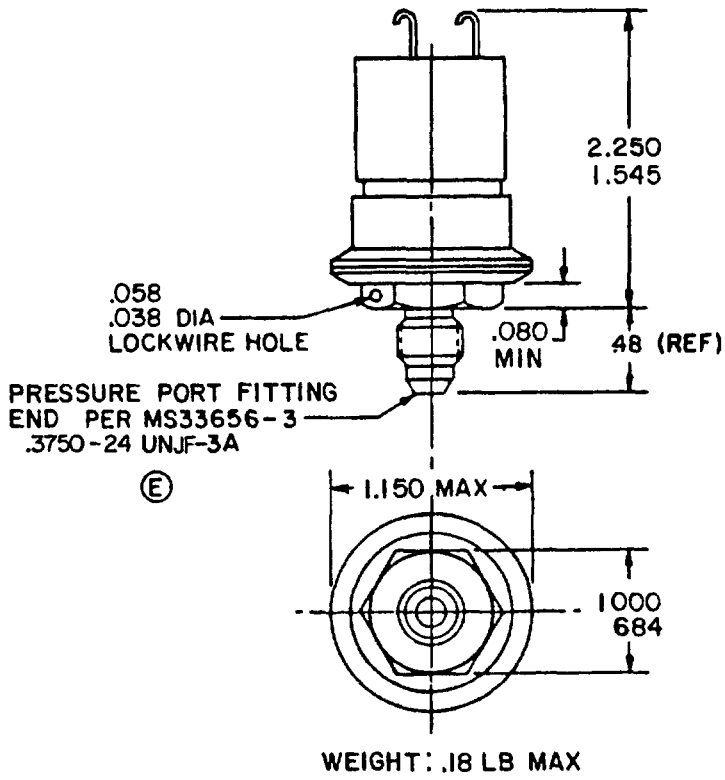


CONFIGURATION 5

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

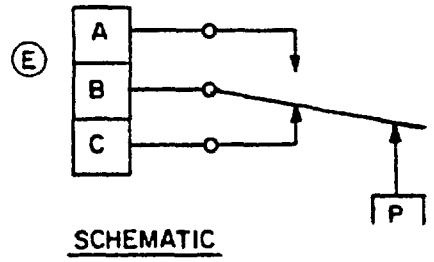

SCHEMATIC

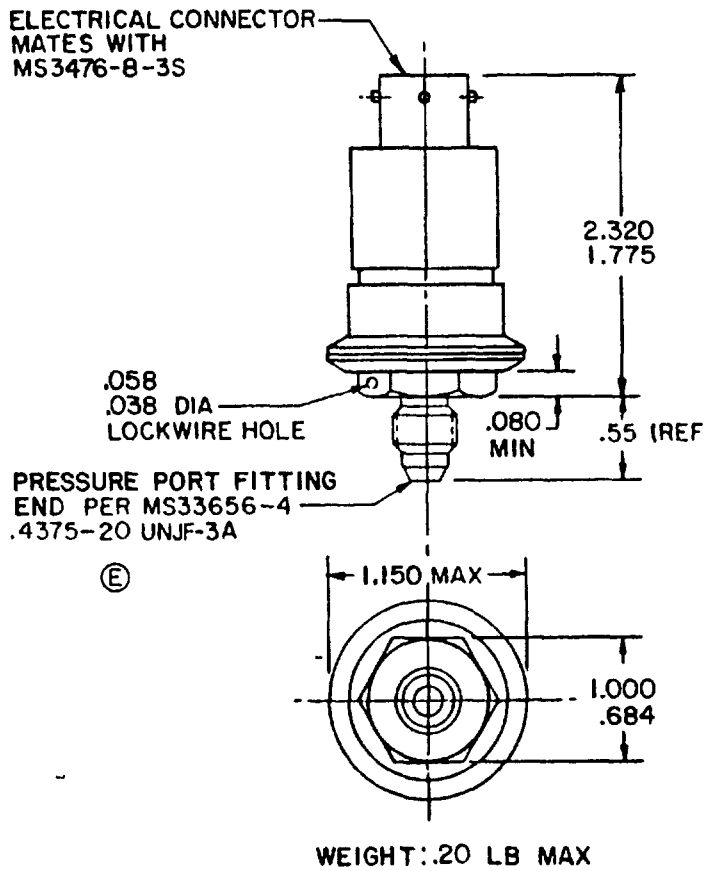


WEIGHT: .20 LB MAX


CONFIGURATION 6

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

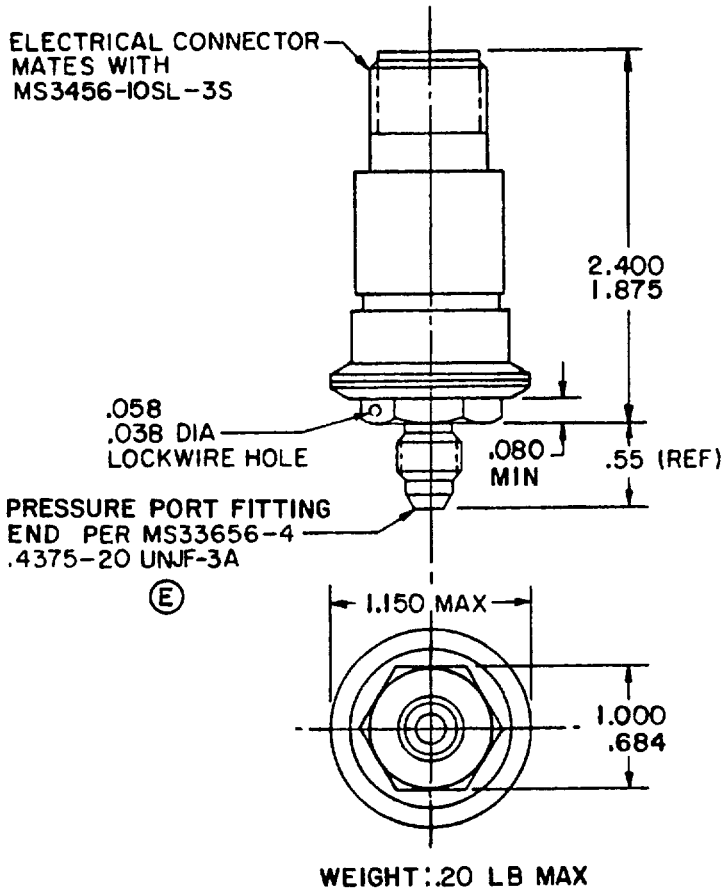

CONFIGURATION 7

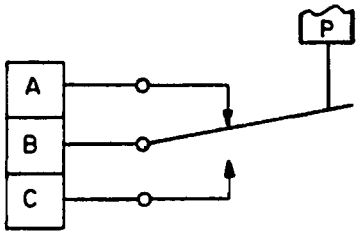

SCHEMATIC

INCHES	MM
.038	.97
.058	1.47
.080	2.03
.48	12.2
.55	14.0
.684	17.37
1.000	25.40
1.150	29.21
1.545	39.24
1.775	45.08
1.875	47.62
2.250	57.15
2.320	58.93
2.400	60.96

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Exact shape of switch is optional provided outline dimensions specified are not exceeded and mounting holes and connector locations are as specified.
4. Schematics shown are for switches with pressure ports exposed to zero lb_f/in^2.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure 1.

Weight: See figure 1.

Calibration: See tables I, II, III, and IV.
Tolerance and maximum differential: See table I.

Proof pressure: 120 lb_f/in^2

System pressure: 60 lb_f/in^2

Burst pressure: 800 lb_f/in^2

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 3 amperes resistive.
1 ampere inductive.

Seal:
Electrical chamber: See table II.
Pressure chamber: Hermetic.
Referenced chamber: Unsealed.

Electrical connector: See figure 1.

Pressure port: See figure 1.

Media: Dry air, nitrogen, fuel MIL-T-5624, or lube oil MIL-L-7808, or hydraulic fluid MIL-H-5606.

High temperature (operating and nonoperating): B (275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (except 80,000 ft).

Shock: C (100 G).

Vibration: S (test condition C, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 10 G).

Life mechanical: A (100,000 cycles).

Life electrical: C (50,000 cycles).

Acceleration: C (8 G).

Pulsation amplitude: A (0%).

Pulsation frequency: A (0 Hz).

Pressure surge: A (less than 100 lb_f/in^2).


Dielectric withstanding voltage (at reduced barometric pressure): Applicable at 250 Vrms.

Connector torque: Applicable.

Terminal strength: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

Part number: Part numbers shall be assigned as illustrated below:

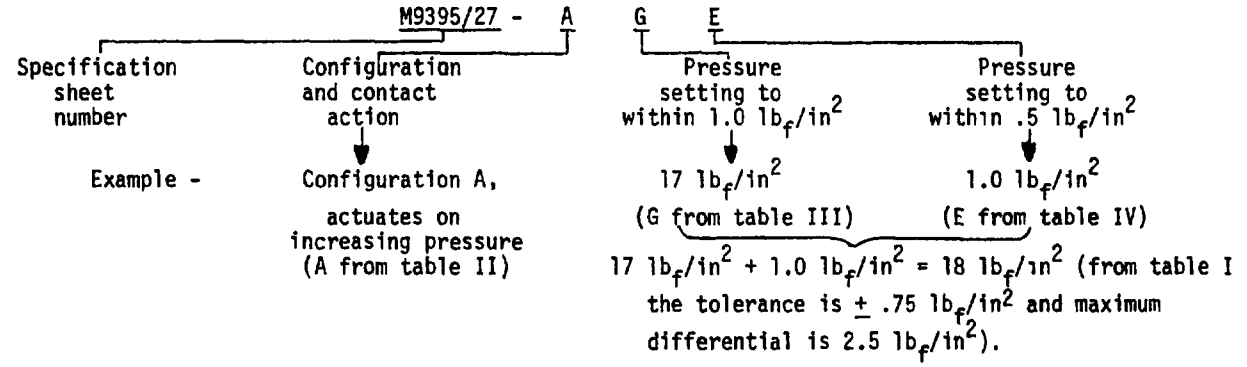

Part number M9395/27-AGE identifies a pressure switch of configuration A which actuates on increasing pressure at 18.0 ±.75 lb_f/in^2 with a maximum differential of 2.5 lb_f/in^2.

TABLE I. Tolerances and maximum differential values for each pressure setting.

Pressure lb_f/in^2	Tolerance (lb_f/in^2) ±	Maximum differential lb_f/in^2
1.0 - 10.5	.5	2
11.0 - 20.0	.75	2.5
20.5 - 29.5	1.0	3.0
30.0 - 30.5	1.0	3.1
31.0	1.5	3.2
31.5 - 32.0	1.5	3.3
32.5 - 33.0	1.5	3.4
33.5 - 34.0	1.5	3.5
34.5 - 35.0	1.5	3.6
35.5 - 36.0	1.5	3.7
36.5 - 37.0	1.5	3.8
37.5 - 38.0	1.5	3.9
38.5 - 39.0	1.5	4.0
39.5 - 40.0	1.5	4.1
40.5 - 41.0	1.5	4.2
41.5 - 42 0	1.5	4.3
42.5 - 43.0	1.5	4.4
43.5 - 44.0	1.5	4.5
44.5	1.5	4.6
45.0 - 45.5	2.0	4.7
46.0 - 46.5	2.0	4.8
47.0 - 47.5	2.0	4.9
48.0 - 48.5	2.0	5.0
49.0 - 49.5	2.0	5.1
50.0 - 50.5	2.0	5.2
51.0 - 51.5	2.0	5.3
52.0 - 52.5	2.0	5.4
53.0 - 53.5	2.0	5.5
54.0 - 54.5	2.0	5.6
55.0 - 55.5	2.0	5.7
56.0 - 56.5	2.0	5.8
57.0 - 57.5	2.0	5.9
58.0 - 58.5	2.0	6.0
59.0 - 59.5	2.0	6.1
60.0	2.0	6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

TABLE II. Configuration and contact action.

	Configuration 1		Configuration 2		Configuration 3	
	Electrical chamber		Electrical chamber		Electrical chamber	
	Hermetic	Unsealed	Hermetic	Unsealed	Hermetic	Unsealed
Actuates on increasing pressure	A	C	E	G	J	L
Actuates on decreasing pressure	B	D	F	H	K	M

Configuration 4		Configuration 5		Configuration 6		Configuration 7	
Electrical chamber		Electrical chamber		Electrical chamber		Electrical chamber	
Hermetic	Unsealed	Hermetic	Unsealed	Hermetic	Unsealed	Hermetic	Unsealed
N	Q	S	U	W	Y	1	3
P	R	T	V	X	Z	2	4

TABLE III. Pressure setting to within 1 lb_f/in^2.

Pressure	Code	Pressure	Code	Pressure	Code
2.0	A	22.0	J	42.0	S
4.5	B	24.5	K	44.5	T
7.0	C	27.0	L	47.0	U
9.5	D	29.5	M	49.5	V
12.0	E	32.0	N	52.0	W
14.5	F	34.5	P	54.5	X
17.0	G	37.0	Q	57.0	Y
19.5	H	39.5	R	59.5	Z

TABLE IV. Pressure setting to within .5 lb_f/in^2.

Unit	Code
-1.0	A
-0.5	B
0	C
0.5	D
1.0	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

TABLE V. Extent of qualification.

Part number	No. of samples required	Tests	Qualifies
ELECTRICAL CHAMBERS EITHER HERMETICALLY SEALED OR UNSEALED			
M9395/27-BAA FAA NYB XYB	1 ea. resistive 1 ea. resistive 1 ea. inductive 1 ea. inductive	Complete per qualification inspection on MIL-S-9395	All
M9395/27-BAA FAE XYB WZD	1 ea. inductive 1 ea. inductive 1 ea. resistive 1 ea. resistive	Group I and Group III	
ELECTRICAL CHAMBERS UNSEALED			
M9395/27-DAA CAA GYB YYB	1 ea. resistive 1 ea. resistive 1 ea. inductive 1 ea. inductive	Complete per qualification inspection of MIL-S-9395	Configurations C, D, G, H, L, M, Q, R, U, V, Y, Z, 3 and 4
M9395/27-DAA CAE YYB ZZD	1 ea. inductive 1 ea. inductive 1 ea. resistive 1 ea. resistive	Group I and Group III	

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities:
Army -
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1113-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-9395/27E

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTS-Standardization
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:15Z
Check the source to verify that this is the current version before use.