
MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, (GAGE)
TYPE II, SPDT, 4 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-S-9395.

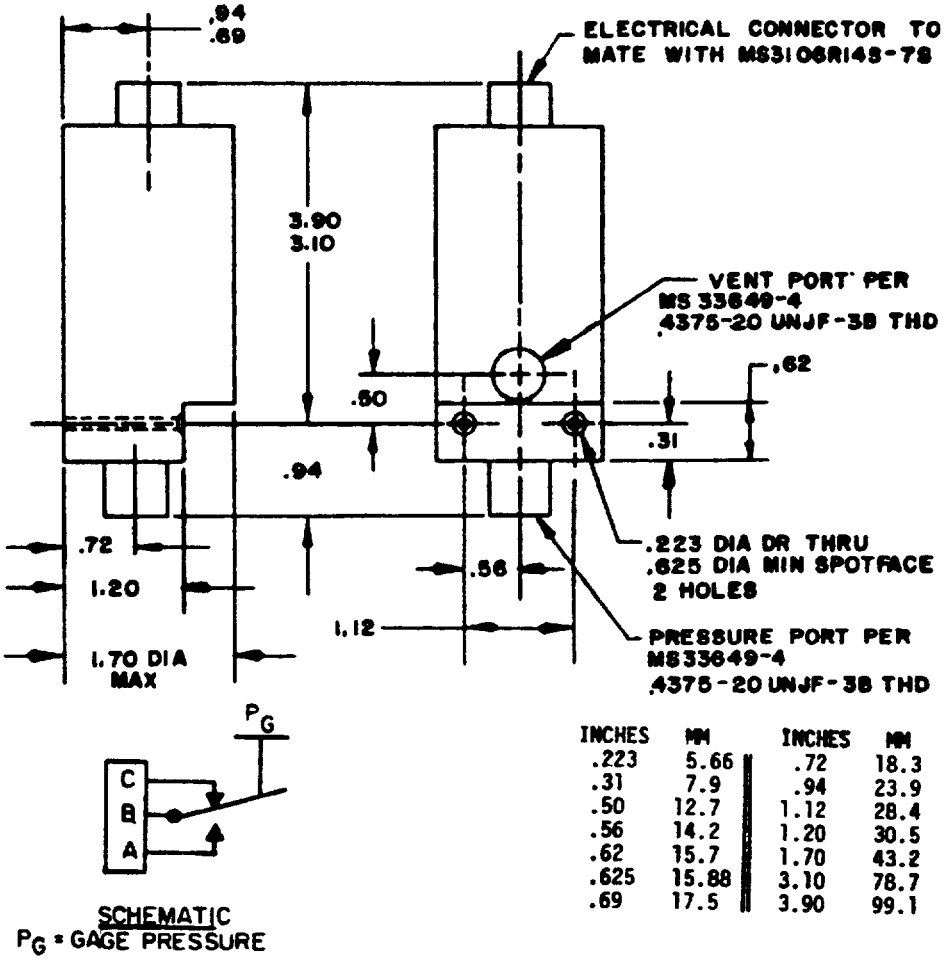

INCHES	MM	INCHES	MM
.223	5.66	.72	18.3
.31	7.9	.94	23.9
.50	12.7	1.12	28.4
.56	14.2	1.20	30.5
.62	15.7	1.70	43.2
.625	15.88	3.10	78.7
.69	17.5	3.90	99.1


Configuration 1


FIGURE 1. Switches.

(C) denotes changes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:11Z
Check the source to verify that this is the current version before use.

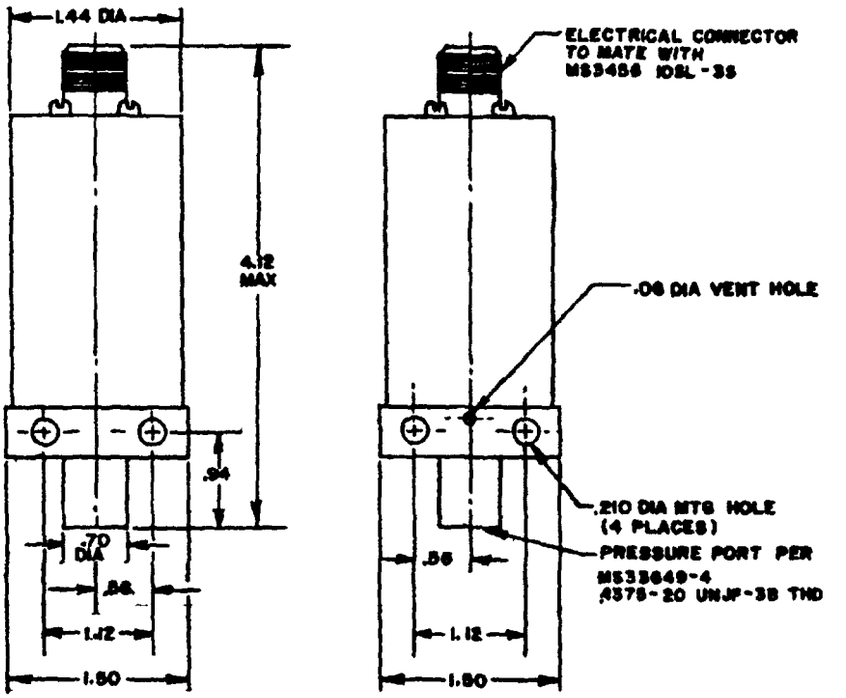

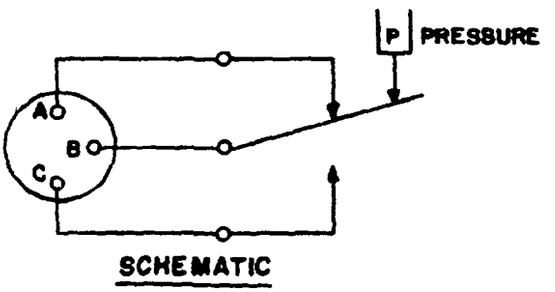

SCHEMATIC

INCHES	MM	INCHES	MM
.06	1.5	1.12	28.4
.210	5.33	1.44	36.6
.56	14.2	1.50	38.1
.70	17.8	4.12	104.6
94	23.9		

Configuration 2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three decimals and ±.02 (.51 mm) for two place decimals.
4. Exact shape of switch optional provided dimensions specified are not exceeded.
5. Schematic illustrated at sea level barometric pressure 29.92 in. (759.97 mmHg).

FIGURE 1. Switches - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-17T12:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure 1.

Weight: 9 ounces maximum.

Calibration: See table I.

Proof pressure: 4,500 lb_f/in^2.
Vent port proof pressure (configuration 1 only): Leakage from the return vent port shall not exceed 1 drop per minute with system pressure applied to pressure port.

System pressure: 3,000 lb_f/in^2.

Burst pressure: 7,500 lb_f/in^2.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 4 amperes resistive.
2 amperes inductive (L/R ratio = .026).

Seal:
Electrical chamber: Watertight.
Pressure chamber: Watertight.
Reference chamber: Unsealed.

Media: Hydraulic fluid per MIL-H-5606.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 20 G).

Life:
Mechanical - A (100,000 cycles).
Electrical - C (50,000 cycles).

Acceleration: B (4 G).

Pulsation amplitude: C (5 percent).

Pulsation frequency: D (500 $\pm$50 Hz).

Pressure rise: F (500,000 lb_f/in^2).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/2- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure switch settings

Dash no.	Pressure switch settings		Minimum dead band lb_f/in^2	Configuration
	Increasing lb_f/in^2	Decreasing lb_f/in^2		
01	1,200 ±250	By 700	100	1
02	2,900 ±150	By 2,400	200	1
Ⓒ 03	By 2,000	At 1,700 ±100	---	2
Ⓒ 04	By 2,875	At 2,600 ±100	---	2

Custodians.
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - AV
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activity
Navy - MC

Preparing activity
Air Force - 85

(Project 5930-1055-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-9395/2C Switches, Pressure, (Gage) Type II, SPDT, 4 Amperes FSC 5930

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C 16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.