DETAIL SPECIFICATION SHEET

# SWITCHES, PRESSURE, (GAGE), TYPE II, SPDT, 4 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pressure switches described herein shall consist of this document and the latest issue of Specification MIL-DTL-9395.




| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .223 | 5.66 | .72 | 18.29 |
| .31 | 7.87 | .94 | 23.88 |
| .50 | 12.70 | 1.12 | 28.45 |
| .56 | 14.22 | 1.20 | 30.48 |
| .62 | 15.75 | 1.70 | 43.18 |
| .625 | 15.88 | 3.10 | 78.74 |
| .69 | 17.53 | 3.90 | 99.06 |

Configuration 1

FIGURE 1. Switches.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

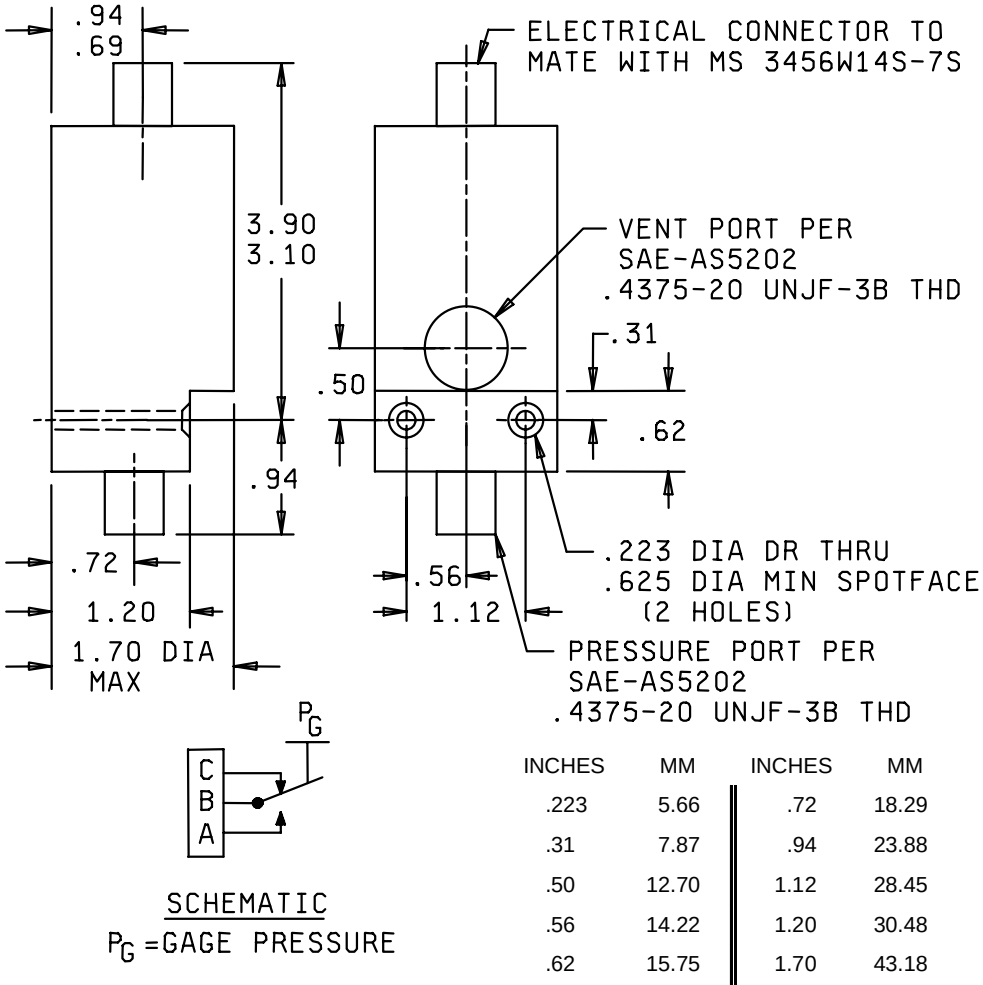Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.




| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .06 | 1.5 | 1.12 | 28.4 |
| .210 | 5.33 | 1.44 | 36.6 |
| .56 | 14.2 | 1.50 | 38.1 |
| .70 | 17.8 | 4.12 | 104.6 |
| .94 | 23.9 | | |

Configuration 2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three decimals and ±.02 (.51 mm) for two decimals.
4. Exact shape of switch optional provided dimensions specified are not exceeded.
5. Schematic illustrated at sea level barometric pressure 29.92 in (759.97 mmHg).

FIGURE 1. Switches - Continued.

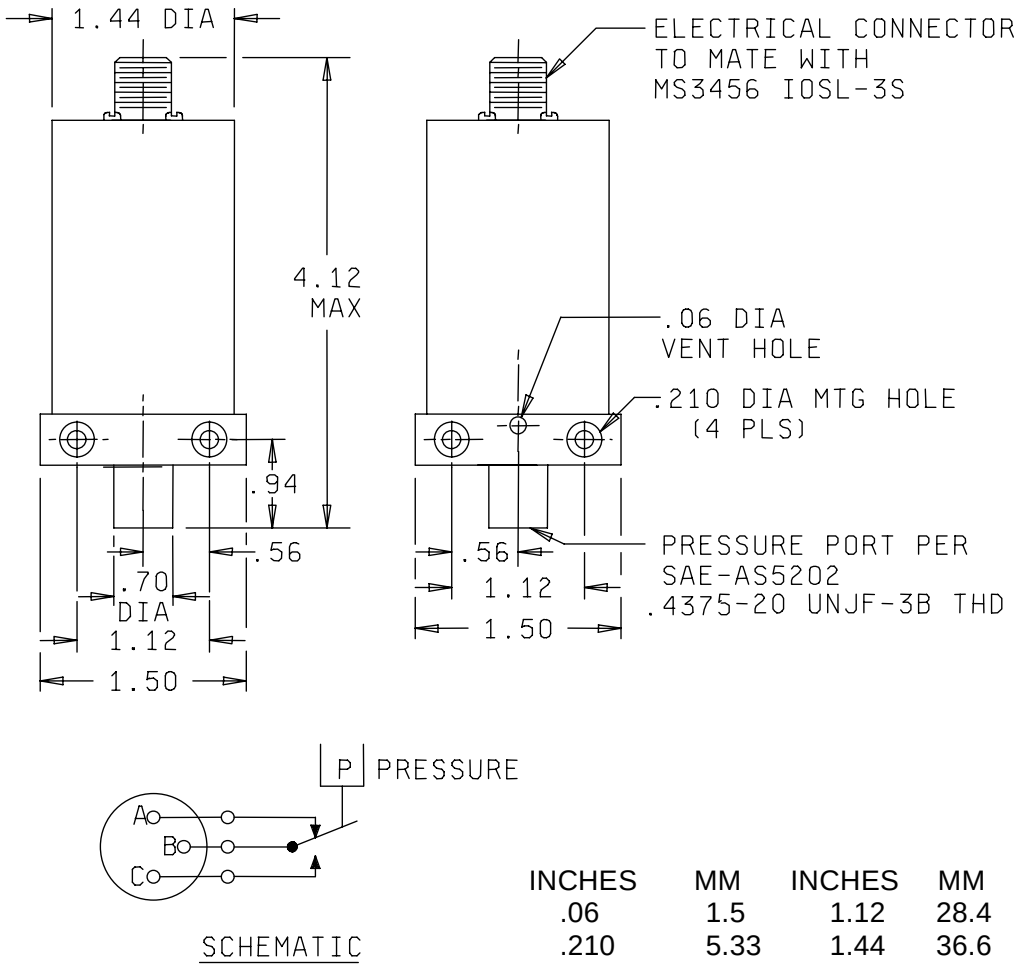

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configuration, and electrical schematic: See figure 1.

Weight: 9 ounces maximum.

Calibration: See table I.

Proof pressure: 4,500 $lb_f/in^2$.
Vent port proof pressure (configuration 1 only): Leakage from the return vent port shall not exceed 1 drop per minute with system pressure applied to pressure port.

System pressure: 3,000 $lb_f/in^2$.

Burst pressure: 7,500 $lb_f/in^2$.

Electrical ratings:
Operating voltage - 28 Vdc.
Current rating - 4 amperes resistive.
2 amperes inductive (L/R ratio = .026)

Seal:
Electrical chamber: Unsealed.
Pressure chamber: Water tight.
Reference chamber: Unsealed.

Media: Hydraulic fluid per MIL-PRF-6083, MIL-PRF-46170, MIL-PRF-83282 or MIL-PRF-87257.

High temperature (operating and nonoperating): B (+275°F).

Low temperature (operating and nonoperating): D (-65°F).

Altitude: C (70,000 feet).

Shock: C (100 G).

Vibration: S (test condition D, method 204 of MIL-STD-202, except 10 - 2,000 Hz, 20 G).

Life:
Mechanical - A (100,000 cycles).
Electrical - A (100,000 cycles).

Acceleration: B (4 G).

Pulsation amplitude: C (5 percent).

Pulsation frequency: D (500 ±50 Hz).

Pressure rise: F (500,000 $lb_f/in^2$).

Dielectric withstanding voltage (at reduced barometric pressure): Applicable.

Connector torque: Applicable.

Part number: M9395/2- (dash number from table I).



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and pressure switch settings.

| Dash no. | Pressure switch settings | | Minimum dead band $lb_f/in^2$ | Configuration |
|---|---|---|---|---|
| | Increasing $lb_f/in^2$ | Decreasing $lb_f/in^2$ | | |
| 01 | 1,200 ±250 | By 700 | 100 | 1 |
| 02 | 2,900 ±150 | By 2,400 | 200 | 1 |
| 03 | By 2,000 | At 1,700 ±100 | --- | 2 |
| 04 | By 2,875 | At 2,600 ±100 | --- | 2 |

NOTES
Referenced documents. In addition to MIL-DTL-9395, this specification sheet references the following documents.

MIL-PRF-6083
MIL-PRF-46170
MIL-PRF-83282
MIL-PRF-87257
MS3456
MIL-STD-202
SAE-AS5202

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AV
Navy - AS, MC
Air Force - 99

Preparing activity:
DLA - CC

(Project 5930-1782)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T12:11Z
Check the source to verify that this is the current version before use.